

**Z8<sup>®</sup> Z8611**  
**Z8<sup>®</sup> Z8612**  
**Z8<sup>®</sup> Z8613**

**Zilog**

**Product Specification**

March 1985

Z8611 Single-Chip Microcomputer with 4K ROM  
 Z8612 Development Device with Memory Interface  
 Z8613 Prototyping Device with EPROM Interface

**Features**

- Complete microcomputer, 4K bytes of ROM, 128 bytes of RAM, 32 I/O lines, and up to 60K bytes addressable external space each for program and data memory.
- 144-byte register file, including 124 general-purpose registers, four I/O port registers, and 16 status and control registers.
- Average instruction execution time of 1.5  $\mu$ s, maximum of 3  $\mu$ s.
- Vectored, priority interrupts for I/O, counter/timers, and UART.
- Full-duplex UART and two programmable 8-bit counter/timers, each with a 6-bit programmable prescaler.
- Register Pointer so that short, fast instructions can access any of nine working-register groups in 1  $\mu$ s.
- On-chip oscillator which accepts crystal or external clock drive.
- Single +5 V power supply—all pins TTL-compatible.

**General Description**

The Z8611 microcomputer introduces a new level of sophistication to single-chip architecture. Compared to earlier single-chip microcomputers, the Z8611 offers faster execution; more efficient use of memory; more sophisticated interrupt, input/output and bit-manipulation capabilities; and easier system expansion.

Under program control, the Z8611 can be tailored to the needs of its user. It can be con-

figured as a stand-alone microcomputer with 4K bytes of internal ROM, a traditional microprocessor that manages up to 120K bytes of external memory, or a parallel-processing element in a system with other processors and peripheral controllers linked by the Z-BUS. In all configurations, a large number of pins remain available for I/O.

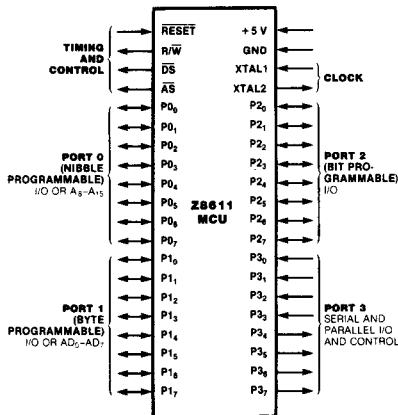


Figure 1. Pin Functions

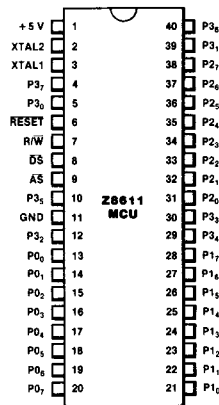


Figure 2a. 40-pin Dual-in-Line Package (DIP) Pin Assignments

Z8611/12/13 MCU

**Pin Description**

**$\overline{AS}$ .** *Address Strobe* (output, active Low). Address Strobe is pulsed once at the beginning of each machine cycle. Addresses output via Port 1 for all external program or data memory transfers are valid at the trailing edge of  $\overline{AS}$ . Under program control,  $\overline{AS}$  can be placed in the high-impedance state along with Ports 0 and 1, Data Strobe, and Read/Write.

**$\overline{DS}$ .** *Data Strobe* (output, active Low). Data Strobe is activated once for each external memory transfer.

**P0<sub>0</sub>-P0<sub>7</sub>, P1<sub>0</sub>-P1<sub>7</sub>, P2<sub>0</sub>-P2<sub>7</sub>, P3<sub>0</sub>-P3<sub>7</sub>.** *I/O Port Lines* (input/outputs, TTL-compatible). These 32 lines are divided into four 8-bit I/O ports that can be configured under program control

for I/O or external memory interface.

**$\overline{RESET}$ .** *Reset* (input, active Low).  $\overline{RESET}$  initializes the Z8611. When  $\overline{RESET}$  is deactivated, program execution begins from internal program location 000CH.

**R/ $\overline{W}$ .** *Read/Write* (output). R/ $\overline{W}$  is Low when the Z8611 is writing to external program or data memory.

**XTAL1, XTAL2.** *Crystal 1, Crystal 2* (time-base input and output). These pins connect a parallel-resonant crystal (8 or 12 MHz maximum) or an external single-phase clock (8 or 12 MHz maximum) to the on-chip clock oscillator and buffer.

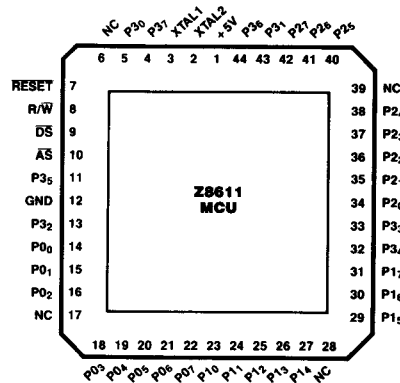


Figure 2b. 44-pin Dual-In-Line Package (DIP). Pin Assignments

## Architecture

Z8611 architecture is characterized by a flexible I/O scheme, an efficient register and address space structure and a number of ancillary features that are helpful in many applications.

Microcomputer applications demand powerful I/O capabilities. The Z8611 fulfills this with 32 pins dedicated to input and output. These lines are grouped into four ports of eight lines each and are configurable under software control to provide timing, status signals, serial or parallel I/O with or without handshake, and an address/data bus for interfacing external memory.

Because the multiplexed address/data bus is merged with the I/O-oriented ports, the Z8611 can assume many different memory and I/O configurations. These configurations range from a self-contained microcomputer to a

microprocessor that can address 120K bytes of external memory (Figure 3).

Three basic address spaces are available to support this wide range of configurations: program memory (internal and external), data memory (external) and the register file (internal). The 144-byte random-access register file is composed of 124 general-purpose registers, four I/O port registers, and 16 control and status registers.

To unburden the program from coping with real-time problems such as serial data communication and counting/timing, an asynchronous receiver/transmitter (UART) and two counter/timers with a large number of user-selectable modes are offered on-chip. Hardware support for the UART is minimized because one of the on-chip timers supplies the bit rate.

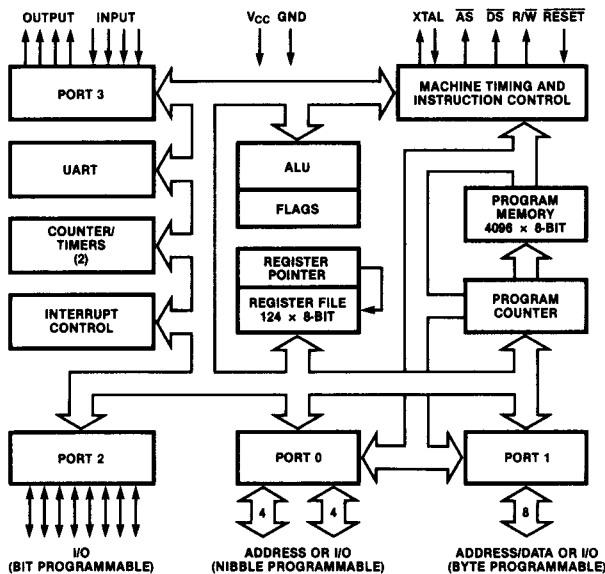


Figure 3. Functional Block Diagram

## Address Spaces

**Program Memory.** The 16-bit program counter addresses 64K bytes of program memory space. Program memory can be located in two areas: one internal and the other external (Figure 4). The first 4096 bytes consist of on-chip mask-programmed ROM. At addresses 4096 and greater, the Z8611 executes external program memory fetches.

The first 12 bytes of program memory are reserved for the interrupt vectors. These locations contain six 16-bit vectors that correspond to the six available interrupts.

**Data Memory.** The Z8611 can address 60K bytes of external data memory beginning at

location 4096 (Figure 5). External data memory may be included with or separated from the external program memory space.

DM, an optional I/O function that can be programmed to appear on pin P3<sub>4</sub>, is used to distinguish between data and program memory space.

**Register File.** The 144-byte register file includes four I/O port registers (R0-R3), 124 general-purpose registers (R4-R127) and 16 control and status registers (R240-R255). These registers are assigned the address locations shown in Figure 6.

Z8611 instructions can access registers

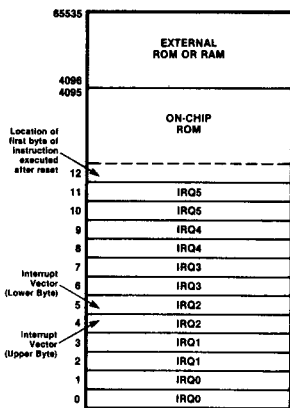


Figure 4. Program Memory Map

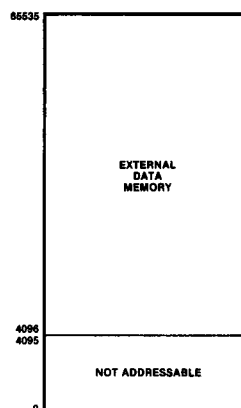


Figure 5. Data Memory Map

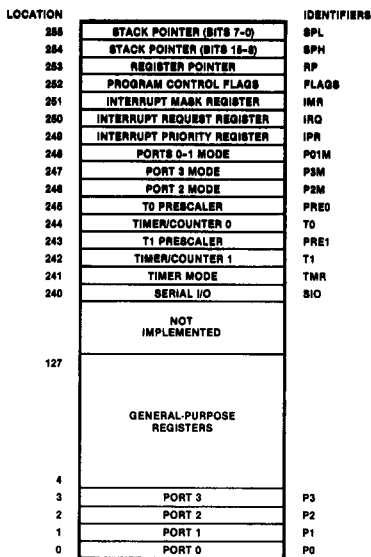


Figure 6. The Register File

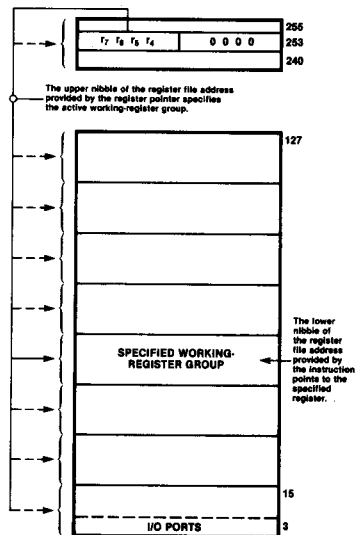


Figure 7. The Register Pointer

**Address Spaces**  
(Continued)

directly or indirectly with an 8-bit address field. The Z8611 also allows short 4-bit register addressing using the Register Pointer (one of the control registers). In the 4-bit mode, the register file is divided into nine working-register groups, each occupying 16 contiguous locations (Figure 7). The Register Pointer addresses the starting location of the active working-register group.

**Serial Input/Output**

Port 3 lines P3<sub>0</sub> and P3<sub>7</sub> can be programmed as serial I/O lines for full-duplex serial asynchronous receiver/transmitter operation. The bit rate is controlled by Counter/Timer 0, with a maximum rate of 62.5K bits/second, for 8 MHz and 94.8K bits/second for 12 MHz.

The Z8611 automatically adds a start bit and two stop bits to transmitted data (Figure 8). Odd parity is also available as an option. Eight data bits are always transmitted, regardless of

**Stacks.** Either the internal register file or the external data memory can be used for the stack. A 16-bit Stack Pointer (R254 and R255) is used for the external stack, which can reside anywhere in data memory between locations 4096 and 65535. An 8-bit Stack Pointer (R255) is used for the internal stack that resides within the 124 general-purpose registers (R4-R127).

parity selection. If parity is enabled, the eighth bit is the odd parity bit. An interrupt request (IRQ<sub>4</sub>) is generated on all transmitted characters.

Received data must have a start bit, eight data bits and at least one stop bit. If parity is on, bit 7 of the received data is replaced by a parity error flag. Received characters generate the IRQ<sub>3</sub> interrupt request.

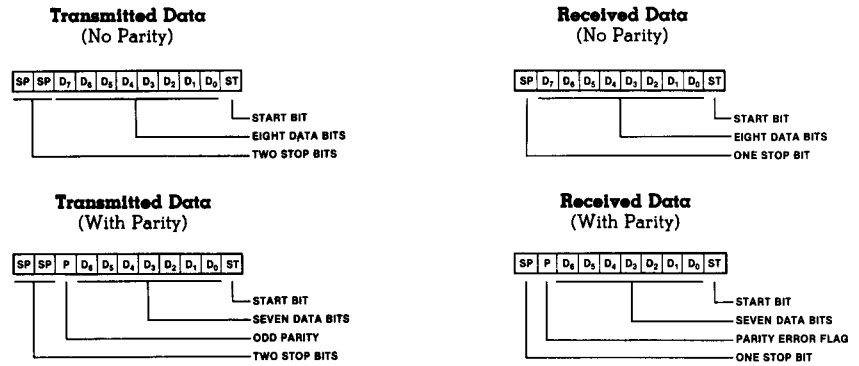


Figure 8. Serial Data Formats

**Counter/Timers**

The Z8611 contains two 8-bit programmable counter/timers (T<sub>0</sub> and T<sub>1</sub>), each driven by its own 6-bit programmable prescaler. The T<sub>1</sub> prescaler can be driven by internal or external clock sources; however, the T<sub>0</sub> prescaler is driven by the internal clock only.

The 6-bit prescalers can divide the input frequency of the clock source by any number from 1 to 64. Each prescaler drives its counter, which decrements the value (1 to 256) that has been loaded into the counter. When the counter reaches the end of count, a timer interrupt request—IRQ<sub>4</sub> (T<sub>0</sub>) or IRQ<sub>5</sub> (T<sub>1</sub>)—is generated.

The counters can be started, stopped, restarted to continue, or restarted from the initial value. The counters can also be programmed to stop upon reaching zero (single-pass mode) or to automatically reload the

initial value and continue counting (modulo-n continuous mode). The counters, but not the prescalers, can be read any time without disturbing their value or count mode.

The clock source for T<sub>1</sub> is user-definable and can be the internal microprocessor clock (4 MHz maximum for the 8 MHz device and a 6 MHz maximum for the 12 MHz device.) divided by four, or an external signal input via Port 3. The Timer Mode register configures the external timer input as an external clock (1 MHz maximum), a trigger input that can be retriggerable or non-retriggerable, or as a gate input for the internal clock. The counter/timers can be programmably cascaded by connecting the T<sub>0</sub> output to the input of T<sub>1</sub>. Port 3 line P3<sub>6</sub> also serves as a timer output (T<sub>OUT</sub>) through which T<sub>0</sub>, T<sub>1</sub> or the internal clock can be output.

## I/O Ports

The Z8611 has 32 lines dedicated to input and output. These lines are grouped into four ports of eight lines each and are configurable as input, output or address/data. Under software control, the ports can be programmed to

**Port 1** can be programmed as a byte I/O port or as an address/data port for interfacing external memory. When used as an I/O port, Port 1 may be placed under handshake control. In this configuration, Port 3 lines P33 and P34 are used as the handshake controls RDY1 and DAV1 (Ready and Data Available).

Memory locations greater than 4096 are referenced through Port 1. To interface external memory, Port 1 must be programmed for the multiplexed Address/Data mode. If more than 256 external locations are required, Port 0 must output the additional lines.

Port 1 can be placed in the high-impedance state along with Port 0,  $\overline{AS}$ ,  $\overline{DS}$  and  $R/\overline{W}$ ,

**Port 0** can be programmed as a nibble I/O port, or as an address port for interfacing external memory. When used as an I/O port, Port 0 may be placed under handshake control. In this configuration, Port 3 lines P32 and P35 are used as the handshake controls DAV0 and RDY0. Handshake signal assignment is dictated by the I/O direction of the upper nibble P04-P07.

For external memory references, Port 0 can provide address bits A8-A11 (lower nibble) or A8-A15 (lower and upper nibble) depending on the required address space. If the address range requires 12 bits or less, the upper nibble of Port 0 can be programmed independently as

**Port 2** bits can be programmed independently as input or output. This port is always available for I/O operations. In addition, Port 2 can be configured to provide open-drain outputs.

Like Ports 0 and 1, Port 2 may also be placed under handshake control. In this configuration, Port 3 lines P31 and P36 are used as the handshake controls lines DAV2 and RDY2. The handshake signal assignment for Port 3 lines P31 and P36 is dictated by the direction (input or output) assigned to bit 7 of Port 2.

**Port 3** lines can be configured as I/O or control lines. In either case, the direction of the eight lines is fixed as four input (P30-P33) and four output (P34-P37). For serial I/O, lines P30 and P37 are programmed as serial in and serial out respectively.

Port 3 can also provide the following control functions: handshake for Ports 0, 1 and 2 (DAV and RDY); four external interrupt request signals (IRQ0-IRQ3); timer input and output signals (TIN and TOUT) and Data Memory Select ( $\overline{DM}$ ).

provide address outputs, timing, status signals, serial I/O, and parallel I/O with or without handshake. All ports have active pull-ups and pull-downs compatible with TTL loads.

allowing the Z8611 to share common resources in multiprocessor and DMA applications. Data transfers can be controlled by assigning P33 as a Bus Acknowledge input, and P34 as a Bus Request output.




Figure 9a. Port 1

I/O while the lower nibble is used for addressing. When Port 0 nibbles are defined as address bits, they can be set to the high-impedance state along with Port 1 and the control signals  $\overline{AS}$ ,  $\overline{DS}$  and  $R/\overline{W}$ .




Figure 9b. Port 0




Figure 9c. Port 2




Figure 9d. Port 3

## Interrupts

The Z8611 allows six different interrupts from eight sources: the four Port 3 lines P3<sub>0</sub>-P3<sub>3</sub>, Serial In, Serial Out, and the two counter/timers. These interrupts are both maskable and prioritized. The Interrupt Mask register globally or individually enables or disables the six interrupt requests. When more than one interrupt is pending, priorities are resolved by a programmable priority encoder that is controlled by the Interrupt Priority register.

All Z8611 interrupts are vectored. When an interrupt request is granted, an interrupt machine cycle is entered. This disables all

subsequent interrupts, saves the Program Counter and status flags, and branches to the program memory vector location reserved for that interrupt. This memory location and the next byte contain the 16-bit address of the interrupt service routine for that particular interrupt request.

Polled interrupt systems are also supported. To accommodate a polled structure, any or all of the interrupt inputs can be masked and the Interrupt Request register polled to determine which of the interrupt requests needs service.

## Clock

The on-chip oscillator has a high-gain, parallel-resonant amplifier for connection to a crystal or to any suitable external clock source (XTAL1 = Input, XTAL2 = Output).

The crystal source is connected across XTAL1 and XTAL2, using the recommended capacitors ( $C_1 \leq 15$  pF) from each pin to

ground. The specifications for the crystal are as follows:

- AT cut, parallel resonant
- Fundamental type, 8/12 MHz maximum
- Series resistance,  $R_s \leq 100 \Omega$

## Z8612 Development Device

The Z8612 is a development version (Figure 10) of the 40-pin mask-programmed Z8611. It allows the user to prototype the system in hardware with an actual device and to develop the code that is eventually mask-programmed into the on-chip ROM of the Z8611.

The Z8612 is identical to the Z8611 with the following exceptions:

- The internal ROM has been removed.
- The ROM address lines and data lines are buffered and brought out to external pins.

- Control lines for the new memory have been added.

**Pin Description.** The functions of the Z8612 I/O lines,  $\overline{AS}$ ,  $\overline{DS}$ , R/W, XTAL1, XTAL2 and  $\overline{RESET}$  are identical to those of their Z8611 counterparts. The functions of the remaining 24 pins are as follows:

**A<sub>0</sub>-A<sub>11</sub>.** Program Memory Address (outputs). A<sub>0</sub>-A<sub>11</sub> access the first 4K bytes of program memory.

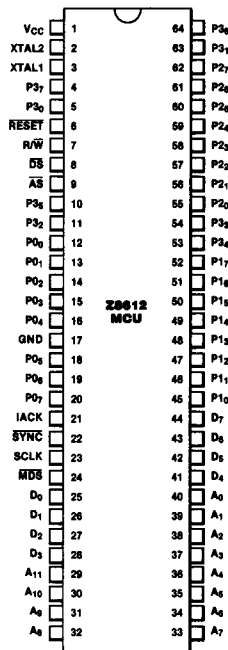


Figure 10a. 84-pin Dual-In-Line (DIP) Pin Assignments

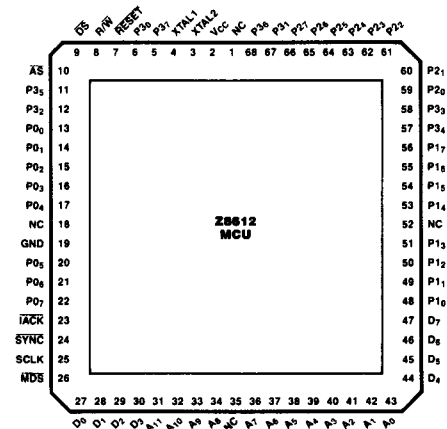


Figure 10b. 68-pin Chip Carrier Pin Assignments

**Z8612  
Development  
Device**  
(Continued)

**D<sub>0</sub>-D<sub>7</sub>.** *Program Data* (inputs). Program data from the first 4K bytes of program memory is input through pins D<sub>0</sub>-D<sub>7</sub>.

**IACK.** *Interrupt Acknowledge* (output, active High). IACK is driven High in response to an interrupt during the interrupt machine cycle.

**MDS.** *Program Memory Data Strobe* (output, active Low). MDS is Low during an instruction fetch cycle when the first 4K bytes of program memory are being accessed.

**SCLK.** *System Clock* (output). SCLK is the internal clock output through a buffer. The clock rate is equal to one-half the crystal frequency.

**SYNC.** *Instruction Sync* (output, active Low). This strobe output is forced Low during the internal clock period preceding an opcode fetch.

**Z8613  
Protopack  
Emulator**

The Z8613 Protopack (R) is used for prototype development and preproduction of mask-programmed applications. The Protopack is a ROMless version of the standard Z8611, housed in a pin-compatible 40-pin package (Figure 11).

To provide pin compatibility and interchangeability with the standard mask-programmed device, the Protopack carries (piggy-back) a 24-pin socket for a direct interface to program memory (Figure 1). The 24-pin socket is equipped with 12 ROM

address lines, 8 ROM data lines and necessary control lines for interface to 2732 EPROM for the first 4K bytes of program memory.

Pin compatibility allows the user to design the pc board for a final 40-pin mask-programmed Z8611, and, at the same time, allows the use of the Protopack to build the prototype and pilot production units. When the final program is established, the user can then switch over to the 40-pin mask-programmed Z8611 for large volume production. The Protopack is also useful in small volume applications where masked ROM setup time and mask charges are prohibitive and program flexibility is desired.

Compared to the conventional EPROM versions of the single-chip microcomputers, the Protopack approach offers two main advantages:

- Ease of developing various programs during the prototyping stage: For instance, in applications where the same hardware configuration is used with more than one program, the Z8613 Protopack allows economical program storage in separate EPROMs (or PROMs), whereas the use of separate EPROM-based single-chip microcomputers is more costly.
- Elimination of long lead time in procuring EPROM-based microcomputers.

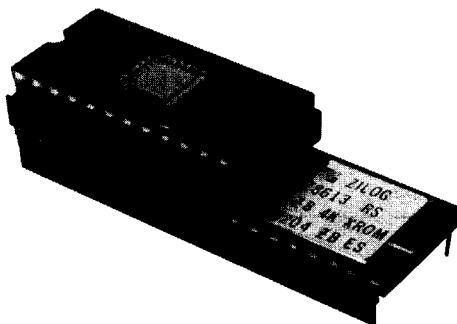


Figure 11. The Z8613 Microcomputer Protopack Emulator

**Instruction  
Set  
Notation**

**Addressing Modes.** The following notation is used to describe the addressing modes and instruction operations as shown in the instruction summary.

<b>IRR</b>	Indirect register pair or indirect working-register pair address
<b>Irr</b>	Indirect working-register pair only
<b>X</b>	Indexed address
<b>DA</b>	Direct address
<b>RA</b>	Relative address
<b>IM</b>	Immediate
<b>R</b>	Register or working-register address
<b>r</b>	Working-register address only
<b>IR</b>	Indirect-register or indirect working-register address
<b>Ir</b>	Indirect working-register address only
<b>RR</b>	Register pair or working register pair address

**Symbols.** The following symbols are used in describing the instruction set.

<b>dst</b>	Destination location or contents
<b>src</b>	Source location or contents
<b>cc</b>	Condition code (see list)
<b>@</b>	Indirect address prefix
<b>SP</b>	Stack pointer (control registers 254-255)
<b>PC</b>	Program counter
<b>FLAGS</b>	Flag register (control register 252)
<b>RP</b>	Register pointer (control register 253)
<b>IMR</b>	Interrupt mask register (control register 251)

Assignment of a value is indicated by the symbol "=". For example,

$$\text{dst} = \text{dst} + \text{src}$$

indicates that the source data is added to the destination data and the result is stored in the destination location. The notation "addr(n)" is used to refer to bit "n" of a given location. For example,

$$\text{dst}(7)$$

refers to bit 7 of the destination operand.




<b>Instruction Set Notation</b> (Continued)	<b>Flags.</b> Control Register R252 contains the following six flags:	<b>Affected flags are indicated by:</b>
<b>C</b> Carry flag	<b>Z</b> Zero flag	<b>0</b> Cleared to zero
<b>S</b> Sign flag	<b>V</b> Overflow flag	<b>1</b> Set to one
<b>D</b> Decimal-adjust flag	<b>H</b> Half-carry flag	<b>*</b> Set or cleared according to operation
		<b>-</b> Unaffected
		<b>X</b> Undefined

Condition Codes	Value	Mnemonic	Meaning	Flags Set
	1000		Always true	---
	0111	C	Carry	C = 1
	1111	NC	No carry	C = 0
	0110	Z	Zero	Z = 1
	1110	NZ	Not zero	Z = 0
	1101	PL	Plus	S = 0
	0101	MI	Minus	S = 1
	0100	OV	Overflow	V = 1
	1100	NOV	No overflow	V = 0
	0110	EQ	Equal	Z = 1
	1110	NE	Not equal	Z = 0
	1001	GE	Greater than or equal	(S XOR V) = 0
	0001	LT	Less than	(S XOR V) = 1
	1010	GT	Greater than	[Z OR (S XOR V)] = 0
	0010	LE	Less than or equal	[Z OR (S XOR V)] = 1
	1111	UGE	Unsigned greater than or equal	C = 0
	0111	ULT	Unsigned less than	C = 1
	1011	UGT	Unsigned greater than	(C = 0 AND Z = 0) = 1
	0011	ULE	Unsigned less than or equal	(C OR Z) = 1
	0000		Never true	---

**Instruction Formats**



**One-Byte Instructions**

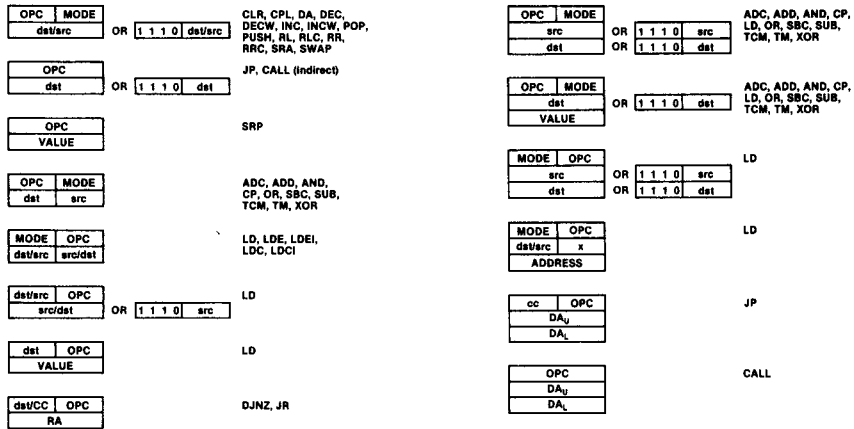







**Two-Byte Instructions**

**Three-Byte Instructions**

Figure 12. Instruction Formats

### Instruction Summary

Instruction and Operation	Addr Mode		Opcode Byte (Hex)	Flags Affected						
	dst	src		C	Z	S	V	D	H	
<b>ADC</b> dst,src dst - dst + src + C	(Note 1)		1□	*	*	*	*	0	*	
<b>ADD</b> dst,src dst - dst + src	(Note 1)		0□	*	*	*	*	0	*	
<b>AND</b> dst,src dst - dst AND src	(Note 1)		5□	-	*	*	0	-	-	
<b>CALL</b> dst SP - SP - 2 @SP - PC; PC - dst	DA IRR		D6 D4	-	-	-	-	-	-	
<b>CCF</b> C - NOT C			EF	*	-	-	-	-	-	
<b>CLR</b> dst dst - 0	R IR		B0 B1	-	-	-	-	-	-	
<b>COM</b> dst dst - NOT dst	R IR		60 61	-	*	*	0	-	-	
<b>CP</b> dst,src dst - src	(Note 1)		A□	*	*	*	*	-	-	
<b>DA</b> dst dst - DA dst	R IR		40 41	*	*	*	X	-	-	
<b>DEC</b> dst dst - dst - 1	R IR		00 01	-	*	*	*	-	-	
<b>DECW</b> dst dst - dst - 1	RR IR		80 81	-	*	*	*	-	-	
<b>DI</b> IMR (7) - 0			8F	-	-	-	-	-	-	
<b>DJNZ</b> r,dst r - r - 1 if r ≠ 0 PC - PC + dst Range: +127, -128	RA		rA r=0-F	-	-	-	-	-	-	
<b>EI</b> IMR (7) - 1			9F	-	-	-	-	-	-	
<b>INC</b> dst dst - dst + 1	r R IR		rE r=0-F 20 21	-	*	*	*	-	-	
<b>INCW</b> dst dst - dst + 1	RR IR		A0 A1	-	*	*	*	-	-	
<b>IRET</b> FLAGS - @SP; SP - SP + 1 PC - @SP; SP - SP + 2; IMR (7) - 1			BF	*	*	*	*	*	*	
<b>JP</b> cc,dst if cc is true PC - dst	DA IRR		cD c=0-F 30	-	-	-	-	-	-	
<b>JR</b> cc,dst if cc is true, PC - PC + dst Range: +127, -128	RA		cB c=0-F	-	-	-	-	-	-	
<b>LD</b> dst,src dst - src	r R R	Im R r	rC r8 r9 r=0-F	-	-	-	-	-	-	
	r	X	C7							
	X	r	D7							
	r	Ir	E3							
	Ir	r	F3							
	R	R	E4							
	R	IR	E5							
	R	Im	E6							
	IR	Im	E7							
	IR	R	F5							
<b>LDC</b> dst,src dst - src	r Irr	Irr r	C2 D2	-	-	-	-	-	-	
<b>LDCI</b> dst,src dst - src r - r + 1; rr - rr + 1	Ir Irr	Irr Ir	C3 D3	-	-	-	-	-	-	

Instruction and Operation	Addr Mode		Opcode Byte (Hex)	Flags Affected						
	dst	src		C	Z	S	V	D	H	
<b>LDE</b> dst,src dst - src	r Irr	Irr r	82 92	-	-	-	-	-	-	
<b>LDEI</b> dst,src dst - src r - r + 1; rr - rr + 1	Ir Irr	Irr Ir	83 93	-	-	-	-	-	-	
<b>NOP</b>			FF	-	-	-	-	-	-	
<b>OR</b> dst,src dst - dst OR src	(Note 1)		4□	-	*	*	0	-	-	
<b>POP</b> dst dst - @SP SP - SP + 1	R IR		50 51	-	-	-	-	-	-	
<b>PUSH</b> src SP - SP - 1; @SP - src	R IR		70 71	-	-	-	-	-	-	
<b>RCF</b> C - 0			CF	0	-	-	-	-	-	
<b>RET</b> PC - @SP; SP - SP + 2			AF	-	-	-	-	-	-	
<b>RL</b> dst		R IR	90 91	*	*	*	*	-	-	
<b>RLC</b> dst		R IR	10 11	*	*	*	*	-	-	
<b>RR</b> dst		R IR	E0 E1	*	*	*	*	-	-	
<b>RRC</b> dst		R IR	C0 C1	*	*	*	*	-	-	
<b>SBC</b> dst,src dst - dst - src - C	(Note 1)		3□	*	*	*	*	1	*	
<b>SCF</b> C - 1			DF	1	-	-	-	-	-	
<b>SRA</b> dst		R IR	D0 D1	*	*	*	0	-	-	
<b>SRP</b> src RP - src		Im	31	-	-	-	-	-	-	
<b>SUB</b> dst,src dst - dst - src	(Note 1)		2□	*	*	*	*	1	*	
<b>SWAP</b> dst		R IR	F0 F1	X	*	*	X	-	-	
<b>TCM</b> dst,src (NOT dst) AND src	(Note 1)		6□	-	*	*	0	-	-	
<b>TM</b> dst,src dst AND src	(Note 1)		7□	-	*	*	0	-	-	
<b>XOR</b> dst,src dst - dst XOR src	(Note 1)		B□	-	*	*	0	-	-	


#### Note 1

These instructions have an identical set of addressing modes, which are encoded for brevity. The first opcode nibble is found in the instruction set table above. The second nibble is expressed symbolically by a □ in this table, and its value is found in the following table to the left of the applicable addressing mode pair.


For example, to determine the opcode of an ADC instruction use the addressing modes r (destination) and Ir (source). The result is 13.

Addr Mode		Lower Opcode Nibble
dst	src	
r	r	2
r	Ir	3
R	R	4
R	IR	5
R	IM	6
IR	IM	7


**R240 SIO**  
Serial I/O Register  
(F0H; Read/Write)




**R244 T0**  
Counter/Timer 0 Register  
(F4H; Read/Write)




**R241 TMR**  
Timer Mode Register  
(F1H; Read/Write)

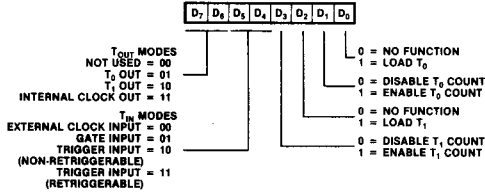


**R245 PRE0**  
Prescaler 0 Register  
(F5H; Write Only)




**R242 T1**  
Counter/Timer 1 Register  
(F2H; Read/Write)




**R246 P2M**  
Port 2 Mode Register  
(F6H; Write Only)



**R243 PRE1**  
Prescaler 1 Register  
(F3H; Write Only)

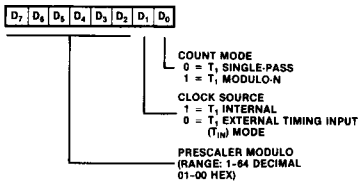

**R247 P3M**  
Port 3 Mode Register  
(F7H; Write Only)

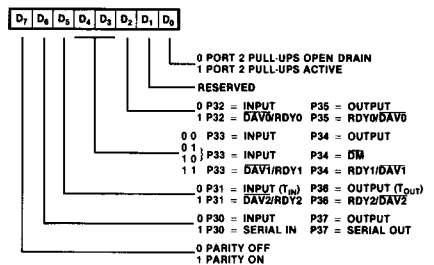


28611/12/13 MCU


Figure 13. Control Registers

**Registers**  
(Continued)


**R248 P01M**  
**Port 0 and 1 Mode Register**  
(F8<sub>H</sub>; Write Only)

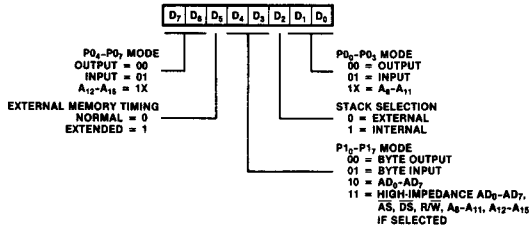


**R252 FLAGS**  
**Flag Register**  
(FC<sub>H</sub>; Read/Write)




**R249 IPR**  
**Interrupt Priority Register**  
(F9<sub>H</sub>; Write Only)

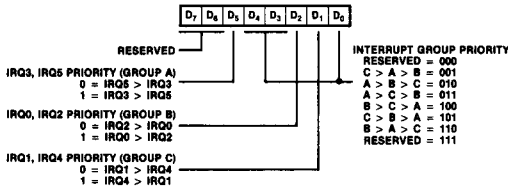


**R253 RP**  
**Register Pointer**  
(FD<sub>H</sub>; Read/Write)




**R250 IRQ**  
**Interrupt Request Register**  
(FA<sub>H</sub>; Read/Write)



**R254 SPH**  
**Stack Pointer**  
(FE<sub>H</sub>; Read/Write)



**R251 IMR**  
**Interrupt Mask Register**  
(FB<sub>H</sub>; Read/Write)



**R255 SPL**  
**Stack Pointer**  
(FF<sub>H</sub>; Read/Write)




Figure 13. Control Registers (Continued)


**Opcode Map**

Lower Nibble (Hex)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	6,5 DEC R <sub>1</sub>	6,5 DEC IR <sub>1</sub>	6,5 ADD r <sub>1</sub> , r <sub>2</sub>	6,5 ADD r <sub>1</sub> , Ir <sub>2</sub>	10,5 ADD R <sub>2</sub> , R <sub>1</sub>	10,5 ADD IR <sub>2</sub> , R <sub>1</sub>	10,5 ADD R <sub>1</sub> , IM	10,5 ADD IR <sub>1</sub> , IM	6,5 LD r <sub>1</sub> , R <sub>2</sub>	6,5 LD r <sub>2</sub> , R <sub>1</sub>	12/10,5 DJNZ r <sub>1</sub> , RA	12/10,0 JR cc, RA	6,5 LD r <sub>1</sub> , IM	12/10,0 JP cc, DA	6,5 INC r <sub>1</sub>	
1	6,5 RLC R <sub>1</sub>	6,5 RLC IR <sub>1</sub>	6,5 ADC r <sub>1</sub> , r <sub>2</sub>	6,5 ADC r <sub>1</sub> , Ir <sub>2</sub>	10,5 ADC R <sub>2</sub> , R <sub>1</sub>	10,5 ADC IR <sub>2</sub> , R <sub>1</sub>	10,5 ADC R <sub>1</sub> , IM	10,5 ADC IR <sub>1</sub> , IM								
2	6,5 INC R <sub>1</sub>	6,5 INC IR <sub>1</sub>	6,5 SUB r <sub>1</sub> , r <sub>2</sub>	6,5 SUB r <sub>1</sub> , Ir <sub>2</sub>	10,5 SUB R <sub>2</sub> , R <sub>1</sub>	10,5 SUB IR <sub>2</sub> , R <sub>1</sub>	10,5 SUB R <sub>1</sub> , IM	10,5 SUB IR <sub>1</sub> , IM								
3	8,0 JP IR <sub>1</sub>	6,1 SRP IM	6,5 SBC r <sub>1</sub> , r <sub>2</sub>	6,5 SBC r <sub>1</sub> , Ir <sub>2</sub>	10,5 SBC R <sub>2</sub> , R <sub>1</sub>	10,5 SBC IR <sub>2</sub> , R <sub>1</sub>	10,5 SBC R <sub>1</sub> , IM	10,5 SBC IR <sub>1</sub> , IM								
4	8,5 DA R <sub>1</sub>	8,5 DA IR <sub>1</sub>	6,5 OR r <sub>1</sub> , r <sub>2</sub>	6,5 OR r <sub>1</sub> , Ir <sub>2</sub>	10,5 OR R <sub>2</sub> , R <sub>1</sub>	10,5 OR IR <sub>2</sub> , R <sub>1</sub>	10,5 OR R <sub>1</sub> , IM	10,5 OR IR <sub>1</sub> , IM								
5	10,5 POP R <sub>1</sub>	10,5 POP IR <sub>1</sub>	6,5 AND r <sub>1</sub> , r <sub>2</sub>	6,5 AND r <sub>1</sub> , Ir <sub>2</sub>	10,5 AND R <sub>2</sub> , R <sub>1</sub>	10,5 AND IR <sub>2</sub> , R <sub>1</sub>	10,5 AND R <sub>1</sub> , IM	10,5 AND IR <sub>1</sub> , IM								
6	6,5 COM R <sub>1</sub>	6,5 COM IR <sub>1</sub>	6,5 TCM r <sub>1</sub> , r <sub>2</sub>	6,5 TCM r <sub>1</sub> , Ir <sub>2</sub>	10,5 TCM R <sub>2</sub> , R <sub>1</sub>	10,5 TCM IR <sub>2</sub> , R <sub>1</sub>	10,5 TCM R <sub>1</sub> , IM	10,5 TCM IR <sub>1</sub> , IM								
7	10/12,1 PUSH R <sub>2</sub>	12/14,1 PUSH IR <sub>2</sub>	6,5 TM r <sub>1</sub> , r <sub>2</sub>	6,5 TM r <sub>1</sub> , Ir <sub>2</sub>	10,5 TM R <sub>2</sub> , R <sub>1</sub>	10,5 TM IR <sub>2</sub> , R <sub>1</sub>	10,5 TM R <sub>1</sub> , IM	10,5 TM IR <sub>1</sub> , IM								
8	10,5 DECW RR <sub>1</sub>	10,5 DECW IR <sub>1</sub>	12,0 LDE r <sub>1</sub> , Ir <sub>2</sub>	18,0 LDEI Ir <sub>1</sub> , Ir <sub>2</sub>												6,1 DI
9	6,5 RL R <sub>1</sub>	6,5 RL IR <sub>1</sub>	12,0 LDE r <sub>2</sub> , Ir <sub>1</sub>	18,0 LDEI Ir <sub>2</sub> , Ir <sub>1</sub>												6,1 EI
A	10,5 INCW RR <sub>1</sub>	10,5 INCW IR <sub>1</sub>	6,5 CP r <sub>1</sub> , r <sub>2</sub>	6,5 CP r <sub>1</sub> , Ir <sub>2</sub>	10,5 CP R <sub>2</sub> , R <sub>1</sub>	10,5 CP IR <sub>2</sub> , R <sub>1</sub>	10,5 CP R <sub>1</sub> , IM	10,5 CP IR <sub>1</sub> , IM								14,0 RET
B	6,5 CLR R <sub>1</sub>	6,5 CLR IR <sub>1</sub>	6,5 XOR r <sub>1</sub> , r <sub>2</sub>	6,5 XOR r <sub>1</sub> , Ir <sub>2</sub>	10,5 XOR R <sub>2</sub> , R <sub>1</sub>	10,5 XOR IR <sub>2</sub> , R <sub>1</sub>	10,5 XOR R <sub>1</sub> , IM	10,5 XOR IR <sub>1</sub> , IM								16,0 IRET
C	6,5 RRC R <sub>1</sub>	6,5 RRC IR <sub>1</sub>	12,0 LDC r <sub>1</sub> , Ir <sub>2</sub>	18,0 LDCI Ir <sub>1</sub> , Ir <sub>2</sub>				10,5 LD r <sub>1</sub> , x, R <sub>2</sub>								6,5 RCF
D	6,5 SRA R <sub>1</sub>	6,5 SRA IR <sub>1</sub>	12,0 LDC r <sub>2</sub> , Ir <sub>1</sub>	18,0 LDCI Ir <sub>2</sub> , Ir <sub>1</sub>	20,0 CALL* IRR <sub>1</sub>		20,0 CALL DA	10,5 LD r <sub>2</sub> , x, R <sub>1</sub>								6,5 SCF
E	6,5 RR R <sub>1</sub>	6,5 RR IR <sub>1</sub>		6,5 LD r <sub>1</sub> , Ir <sub>2</sub>	10,5 LD R <sub>2</sub> , R <sub>1</sub>	10,5 LD IR <sub>2</sub> , R <sub>1</sub>	10,5 LD R <sub>1</sub> , IM	10,5 LD IR <sub>1</sub> , IM								6,5 CCF
F	8,5 SWAP R <sub>1</sub>	8,5 SWAP IR <sub>1</sub>		6,5 LD Ir <sub>1</sub> , r <sub>2</sub>		10,5 LD R <sub>2</sub> , IR <sub>1</sub>										6,0 NOP

Z8611/12/13 MCU

Bytes per Instruction

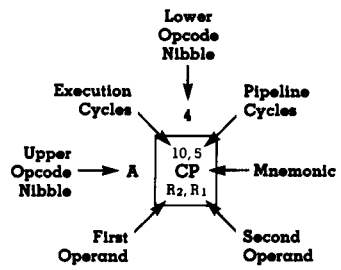

**Legend:**  
 R = 8-Bit Address  
 r = 4-Bit Address  
 R<sub>1</sub> or r<sub>1</sub> = Dst Address  
 R<sub>2</sub> or r<sub>2</sub> = Src Address

**Sequence:**  
 Opcode, First Operand, Second Operand

**Note:** The blank areas are not defined.

\*2-byte instruction; fetch cycle appears as a 3-byte instruction

**Absolute Maximum Ratings**

Voltages on all pins with respect to GND . . . . . -0.3 V to +7.0 V  
 Operating Ambient Temperature . . . . . See Ordering Information  
 Storage Temperature . . . . . -65°C to +150°C

Stresses greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; operation of the device at any condition above those indicated in the operational sections of these specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**Standard Test Conditions**

The DC characteristics listed below apply for the following standard test conditions, unless otherwise noted. All voltages are referenced to GND. Positive current flows into the reference pin.

Standard conditions are:

- +4.75 V ≤ V<sub>CC</sub> ≤ +5.25 V
- GND = 0 V
- 0°C ≤ T<sub>A</sub> ≤ +70°C\*




Figure 14. Test Load 1




Figure 15. Test Load 2

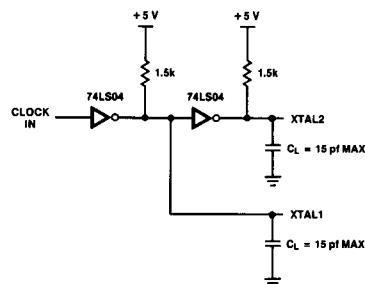



Figure 16. TTL External Clock Interface Circuit  
 (Both the clock and its complement are required)

**DC Characteristics**

Symbol	Parameter	Min	Max	Unit	Condition	Notes
V <sub>CH</sub>	Clock Input High Voltage	3.8	V <sub>CC</sub>	V	Driven by External Clock Generator	
V <sub>CL</sub>	Clock Input Low Voltage	-0.3	0.8	V	Driven by External Clock Generator	
V <sub>IH</sub>	Input High Voltage	2.0	V <sub>CC</sub>	V		
V <sub>IL</sub>	Input Low Voltage	-0.3	0.8	V		
V <sub>RH</sub>	Reset Input High Voltage	3.8	V <sub>CC</sub>	V		
V <sub>RL</sub>	Reset Input Low Voltage	-0.3	0.8	V		
V <sub>OH</sub>	Output High Voltage	2.4		V	I <sub>OH</sub> = -250 μA	1
V <sub>OL</sub>	Output Low Voltage		0.4	V	I <sub>OL</sub> = +2.0 mA	1
I <sub>IL</sub>	Input Leakage	-10	10	μA	0 V ≤ V <sub>IN</sub> ≤ +5.25 V	
I <sub>OL</sub>	Output Leakage	-10	10	μA	0 V ≤ V <sub>IN</sub> ≤ +5.25 V	
I <sub>IR</sub>	Reset Input Current		-50	μA	V <sub>CC</sub> = +5.25 V, V <sub>RL</sub> = 0 V	
I <sub>CC</sub>	V <sub>CC</sub> Supply Current		180	mA		

1. For A<sub>0</sub>-A<sub>11</sub>,  $\overline{\text{MDS}}$ ,  $\overline{\text{SYNC}}$ ,  $\overline{\text{SCLK}}$  and  $\overline{\text{IACK}}$  on the Z8612 version, I<sub>OH</sub> = -100 μA and I<sub>OL</sub> = 1.0 mA.

**External I/O  
or Memory  
Read and  
Write Timing**

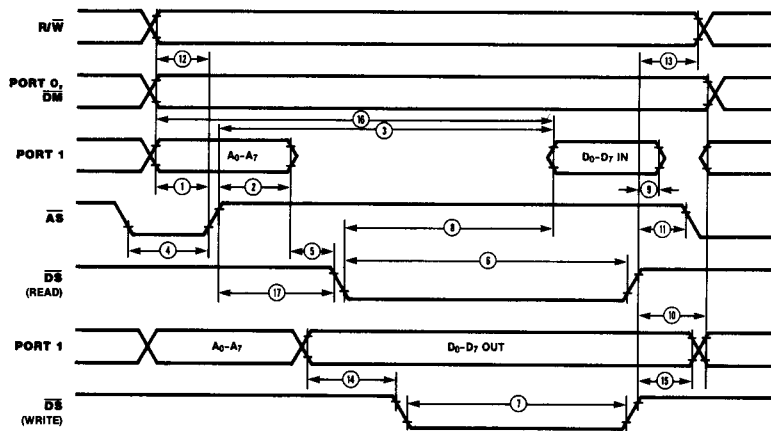

**Figure 17. External I/O or Memory Read/Write**

No.	Symbol	Parameter	Z8611/2/3-8		Z8611/2/3-12		Notes**†°
			Min	Max	Min	Max	
1	TdA(AS)	Address Valid to $\overline{AS}$ ↑ Delay	50		35		2,3
2	TdAS(A)	$\overline{AS}$ ↑ to Address Float Delay	70		45		2,3
3	TdAS(DR)	$\overline{AS}$ ↑ to Read Data Required Valid		360		220	1,2,3
4	TwAS	$\overline{AS}$ Low Width	80		55		2,3
5	TdAz(DS)	Address Float to $\overline{DS}$ ↓	0		0		
6	TwDSR	$\overline{DS}$ (Read) Low Width	250		185		1,2,3
7	TwDSW	$\overline{DS}$ (Write) Low Width	160		110		1,2,3
8	TdDSR(DR)	$\overline{DS}$ ↓ to Read Data Required Valid		200		130	1,2,3
9	ThDR(DS)	Read Data to $\overline{DS}$ ↑ Hold Time	0		0		
10	TdDS(A)	$\overline{DS}$ ↑ to Address Active Delay	70		45		2,3
11	TdDS(AS)	$\overline{DS}$ ↑ to $\overline{AS}$ ↓ Delay	70		55		2,3
12	TdR/W(AS)	R/ $\overline{W}$ Valid to $\overline{AS}$ ↑ Delay	50		30		2,3
13	TdDS(R/W)	$\overline{DS}$ ↑ to R/ $\overline{W}$ Not Valid	60		35		2,3
14	TdDW(DSW)	Write Data Valid to $\overline{DS}$ (Write) ↓ Delay	50		35		2,3
15	TdDS(DW)	$\overline{DS}$ ↑ to Write Data Not Valid Delay	70		45		2,3
16	TdA(DR)	Address Valid to Read Data Required Valid		410		255	1,2,3
17	TdAS(DS)	$\overline{AS}$ ↑ to $\overline{DS}$ ↓ Delay	80		55		2,3

**NOTES:**


1. When using extended memory timing add 2 T<sub>pC</sub>.
2. Timing numbers given are for minimum T<sub>pC</sub>.
3. See clock cycle time dependent characteristics table.

† Test Load 1

- ° All timing references use 2.0V for a logic "1" and 0.8V for a logic "0".
- \* All units in nanoseconds (ns).

**Z8611/2/3 MCU**

**Additional  
Timing  
Table**

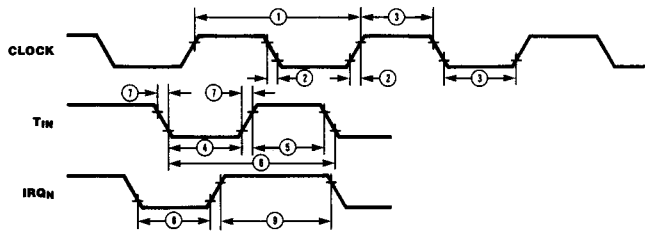

**Figure 18. Additional Timing**


No.	Symbol	Parameter	Z8611/2/3-8		Z8611/2/3-12		Notes*
			Min	Max	Min	Max	
1	TpC	Input Clock Period	125	1000	83	1000	1
2	TrC, tFC	Clock Input Rise And Fall Times		25		15	1
3	TwC	Input Clock Width	37		26		1
4	TwTinL	Timer Input Low Width	100		70		2
5	TwTinH	Timer Input High Width	3TpC		3TpC		2
6	TpTin	Timer Input Period	8TpC		8TpC		2
7	TrTin, tFTin	Timer Input Rise And Fall Times		100		100	2
8a	TwIL	Interrupt Request Input Low Time	100		70		2,3
8b	TwIL	Interrupt Request Input Low Time	3TpC		3TpC		2,4
9	TwIH	Interrupt Request Input High Time	3TpC		3TpC		2,3

**NOTES:**

1. Clock timing references uses 3.8 V for a logic "1" and 0.8 V for a logic "0".
2. Timing reference uses 2.0 V for a logic "1" and 0.8 V for a logic "0".

3. Interrupt request via Port 3 (P3<sub>1</sub>-P3<sub>3</sub>).
  4. Interrupt request via Port 3 (P3<sub>0</sub>).
- \* Units in nanoseconds (ns).

**Z8612, Z8613  
Memory Port  
Timing**



**Figure 19. Memory Port Timing**

No.	Symbol	Parameter	Z8611/2/3-8		Z8611/2/3-12		Notes*
			Min	Max	Min	Max	
1	TdA(DI)	Address Valid to Data Input Delay		460		320	1,2
2	ThDI(A)	Data In Hold Time	0		0		1

**NOTES:**

1. Test Load 2
2. This is a Clock-Cycle-Dependent parameter. For clock frequencies other than the maximum, use the following formula:  
 Z8611/2/3 = 5 TpC - 165  
 Z8611/2/3-12 = 5 TpC - 95

\* Units are nanoseconds unless otherwise specified.



# Handshake Timing

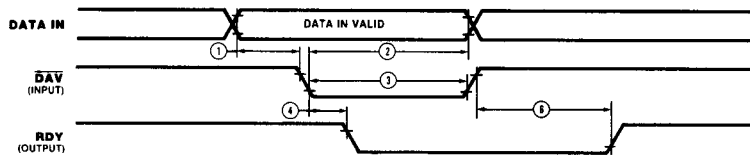


Figure 20a. Input Handshake

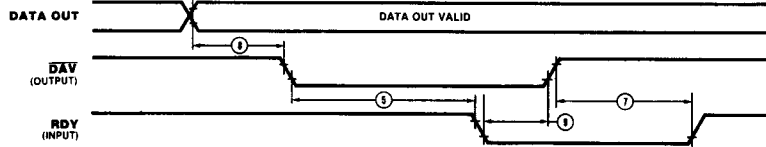


Figure 20b. Output Handshake

No.	Symbol	Parameter	Z8611/2/3-8		Z8611/2/3-12		Notes*†
			Min	Max	Min	Max	
1	TsDI(DAV)	Data In Setup Time	0		0		
2	ThDI(DAV)	Data In Hold Time	230		160		
3	TwDAV	Data Available Width	175		120		
4	TdDAVI(rRDY)	$\overline{DAV}$ ↓ Input to RDY ↓ Delay		175		120	1,2
5	TdDAVO(rRDY)	$\overline{DAV}$ ↓ Output to RDY ↓ Delay	0		0		1,3
6	TdDAVI(rRDY)	$\overline{DAV}$ ↑ Input to RDY ↑ Delay		175		120	1,2
7	TdDAVO(rRDY)	$\overline{DAV}$ ↑ Output to RDY ↑ Delay	0		0		1,3
8	TdDO(DAV)	Data Out to $\overline{DAV}$ ↓ Delay	50		30		1
9	TdRDY(DAV)	Rdy ↓ Input to $\overline{DAV}$ ↑ Delay	0	200	0	140	1

NOTES:

- 1. Test load 1
- 2. Input handshake
- 3. Output handshake
- † All timing references use 2.0 V for a logic "1" and 0.8 V for a logic "0".

\* Units in nanoseconds (ns).

Clock-Cycle-Time-Dependent Characteristics	Number	Symbol	Z8611/2/3-8	Z8611/2/3-12
			Equation	Equation
	1	TdA(AS)	TpC-75	TpC-50
	2	TdAS(A)	TpC-55	TpC-40
	3	TdAS(DR)	4TpC-140*	4TpC-110*
	4	TwAS	TpC-45	TpC-30
	6	TwDSR	3TpC-125*	3TpC-65*
	7	TwDSW	2TpC-90*	2TpC-55*
	8	TdDSR(DR)	3TpC-175*	3TpC-120*
	10	Td(DS)A	TpC-55	TpC-40
	11	TdDS(AS)	TpC-55	TpC-30
	12	TdR/W(AS)	TpC-75	TpC-55
	13	TdDS(R/W)	TpC-65	TpC-50
	14	TdDW(DSW)	TpC-75	TpC-50
	15	TdDS(DW)	TpC-55	TpC-40
	16	TdA(DR)	5TpC-215*	5TpC-160*
	17	TdAS(DS)	TpC-45	TpC-30

\* Add 2TpC when using extended memory timing

Z8611/12/13 MCU

---

## ORDERING INFORMATION

### Z8 MCU, 4K ROM, 8.0 MHz

<b>40-pin DIP</b>	<b>44-pin PCC</b>
Z8611 PS	Z8611 VS†
Z8611 CS	
Z8611 PE	
Z8611 CE	
Z8611 CM*	

### Z8 MCU, 4K ROM, 12.0 MHz

<b>40-pin DIP</b>	<b>44-pin PCC</b>
Z8611-12 PS	Z8611-12 VS†
Z8611-12 CS	

### Z8 MCU, 4K XROM, 8.0 MHz

<b>64-pin DIP</b>	<b>68-pin PCC</b>
Z8612 PS	Z8612 VS†
Z8612 CE	

### Z8 MCU, 4K XROM, 12.0 MHz

<b>64-pin DIP</b>	<b>68-pin PCC</b>
Z8612-12 PS	Z8612-12 VS†

### Z8 MCU, 4K XROM, 8.0 MHz

<b>40-pin Protopack</b>
Z8613 RS
Z8613 RE
Z8613 TS†

### Z8 MCU, 4K XROM, 12.0 MHz

<b>40-pin Protopack</b>
Z8613-12 RS
Z8613-12 TS†

## Codes

First letter is for package; second letter is for temperature.

C = Ceramic DIP  
P = Plastic DIP  
L = Ceramic LCC  
V = Plastic PCC

R = Protopack  
T = Low Profile Protopack  
DIP = Dual-In-Line Package  
LCC = Leadless Chip Carrier  
PCC = Plastic Chip Carrier (Leaded)

## TEMPERATURE

S = 0°C to +70°C  
E = -40°C to +85°C  
M\* = -55°C to +125°C

FLOW  
B = 883 Class B

Example: PS is a plastic DIP, 0°C to +70°C.

†Available soon.

\*For Military Orders, contact your local Zilog Sales Office for Military Electrical Specifications.