



## IA\_P-2W Series

### FIXED INPUT ISOLATED & REGULATED 2W OUTPUT DUAL OUTPUT DIP PACKAGE

**RoHS**  
multi-country patent protection

#### FEATURES

- High Efficiency up to 73%
- Small Footprint
- Dual Voltage Output
- DIP Package Style
- Low ripple and good EMC features
- Good dynamic feature
- 1KVDC Isolation
- Temperature Range: -40°C~+85°C
- UL94-V0 Package
- RoHS Compliance

#### APPLICATIONS

The IA\_P-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:


- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 5\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage = 1000VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanded;

These products don't apply to:

- 1) Where the input supply voltage varied (variation  $\geq \pm 5\%$ ), otherwise our company's WRA series is recommended;

#### MODEL SELECTION

IA0505P-1W5

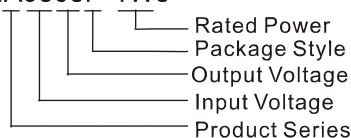

#### PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)	Package Style
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
IA0505P-1W5	5	4.75~5.25	±5	±150	±15	66	DIP
IA1205P-1W5	12	11.4~12.6	±5	±150	±15	73	DIP
IA2405P-1W5	24	22.8~25.2	±5	±150	±15	66	DIP

#### COMMON SPECIFICATIONS

Short circuit protection	1 second
Temperature rise at full load	25°C MAX, 15°C TYP
Cooling	Free air convection
Operating temperature	-40°C~+85°C
Storage temperature range	-55°C ~+125°C
Lead temperature	300°C (1.5mm from case for 10 seconds)
Storage humidity range	$\leq 95\%$
Case material	Plastic (UL94-V0)
MTBF	>3,500,000 hours

#### ISOLATION SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

#### OUTPUT SPECIFICATIONS

Item	Test conditions	MIN	TYP	MAX	Units
Output power		0.15		1.5	W
Line regulation	For $V_{in}$ change of $\pm 5\%$			0.25	%
Load regulation	10% to 100% full load			$\pm 0.5$	%
Output voltage accuracy	100% full load			$\pm 3$	%
Temperature drift	100% full load			0.03	%/°C
Output ripple	20MHz Bandwidth		10	30	mVp-p
Output noise	20MHz Bandwidth		75	150	mVp-p
Switching frequency	Full load, nominal input		75		KHz

Note:


1. All specifications measured at  $T_A = 25^\circ\text{C}$ , humidity < 75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.




**MORNSUN Science & Technology Ltd.**

Address: 8th floor 8th building, Hangzhou Industrial District, Guangzhou, China  
Tel: 86-20-38601850  
Fax: 86-20-38601272  
<http://www.mornsun-power.com>

## TYPICAL CHARACTERISTICS

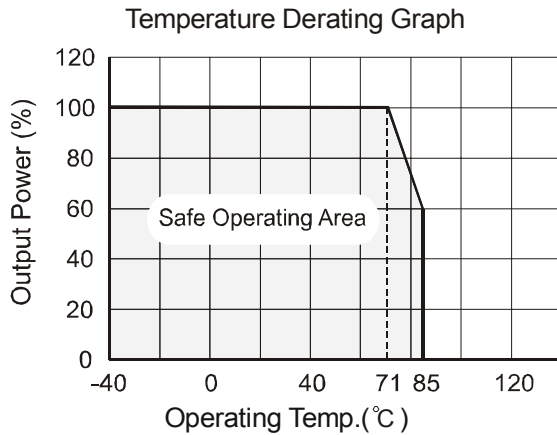


## PIN CONNECTIONS

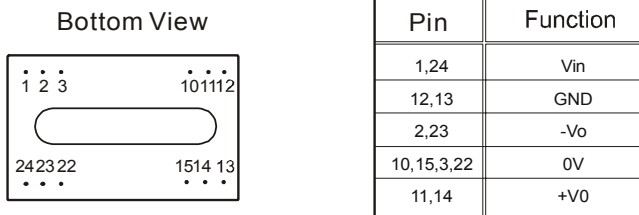


## Filtering

In some circuits which are sensitive to noise and ripple, a filtering capacitor may be added to the DC/DC output end and input end to reduce the noise and ripple. However, the capacitance of the output filter capacitor must proper. If the capacitance is too big, a startup problem might arise. For every channel of output, providing the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor refer to the **EXTERNAL CAPACITOR TABLE**. To get an extremely low ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, which may produce a more significant filtering effect. It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference (see figure 1).

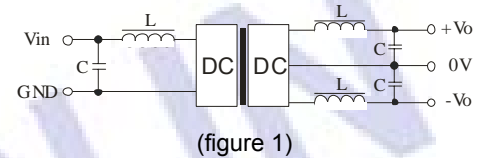

## OUTLINE DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS

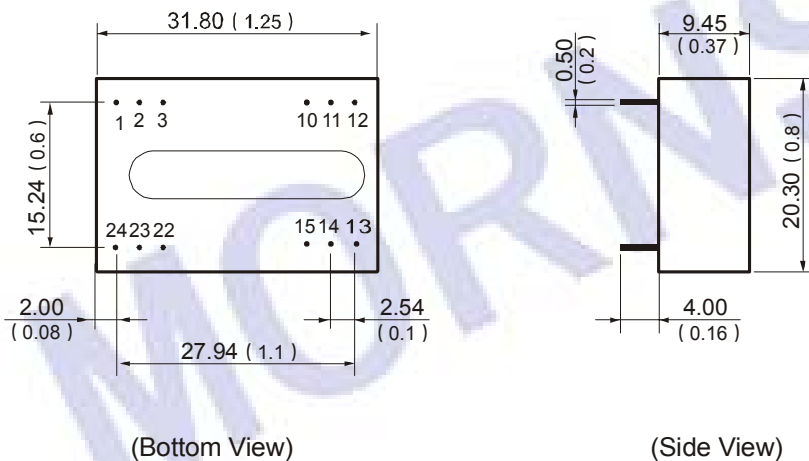

Note: All Pins on a 2.54mm pitch; all pin diameters are 0.50mm; Unit: mm(inch).

## Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

## APPLICATION NOTE

### Requirement on output load

To ensure this module can operate efficiently and reliably, a minimum load is specified for this kind of DC/DC converter in addition to a maximum load (namely full load). During operation, make sure the specified range of input voltage is not exceeded, the minimum output load is **not less than 10%** of the full load, and that this product should never be operated under no load!

## EXTERNAL CAPACITOR TABLE

V <sub>in</sub>	External capacitor	V <sub>out</sub>	External capacitor
5VDC	4.7uF	5VDC	4.7uF
12VDC	2.2uF		
24VDC	1uF		
--	--		