



N-Channel JFETs

J210 **SSTJ211**
J211 **SSTJ212**
J212

PRODUCT SUMMARY				
Part Number	$V_{GS(off)}$ (V)	$V_{(BR)GSS}$ Min (V)	g_{fs} Min (mS)	I_{DSS} Min (mA)
J210	-1 to -3	-25	4	2
J/SSTJ211	-2.5 to -4.5	-25	6	7
J/SSTJ212	-4 to -6	-25	7	15

FEATURES

- Excellent High Frequency Gain: J211/212, Gps 12 dB (typ) @ 400 MHz
- Very Low Noise: 3 dB (typ) @ 400 MHz
- Very Low Distortion
- High ac/dc Switch Off-Isolation
- High Gain: $A_V = 35$ @ 100 μ A

BENEFITS

- Wideband High Gain
- Very High System Sensitivity
- High Quality of Amplification
- High-Speed Switching Capability
- High-Quality Low-Level Signal Amplification

APPLICATIONS

- High-Frequency Amplifier/Mixer
- Oscillator
- Sample-and-Hold
- Very Low Capacitance Switches


DESCRIPTION

The J/SSTJ210 Series n-channel JFETs are general-purpose and high-frequency amplifiers for a wide range of applications. These devices feature low leakage ($I_{GSS} < 100$ pA).


capability. The J/SSTJ210 Series is available in tape-and-reel for automated assembly (see Packaging Information).

The TO-226AA (TO-92) plastic package, provides low cost while the TO-236 (SOT-23) package provides surface-mount

For similar dual products, see the 2N5911/5912 and U440/441 data sheets.

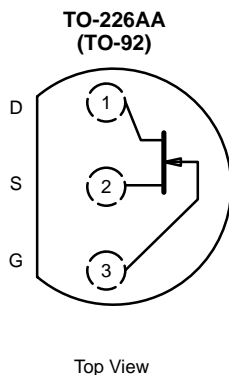

J210
J211
J212



SSTJ211 (Z1)*
SSTJ212 (Z2)*
*Marking Code for TO-236

For applications information see AN104.



ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage -25 V
 Gate Current 10 mA
 Lead Temperature (¹/₁₆" from case for 10 sec.) 300°C
 Storage Temperature -55 to 150°C

Operating Junction Temperature -55 to 150°C
 Power Dissipation^a 350 mW

Notes

a. Derate 2.8 mW/°C above 25°C

SPECIFICATIONS (T_A = 25°C UNLESS OTHERWISE NOTED)										
Parameter	Symbol	Test Conditions	Typ ^a	Limits						Unit
				J210		J/SSTJ211		J/SSTJ212		
				Min	Max	Min	Max	Min	Max	
Static										
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V	-35	-25		-25		-25		V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 15 V, I _D = 1 nA		-1	-3	-2.5	-4.5	-4	-6	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 15 V, V _{GS} = 0 V		2	15	7	20	15	40	mA
Gate Reverse Current	I _{GSS}	V _{GS} = -15 V, V _{DS} = 0 V	-1		-100		-100		-100	pA
		T _A = 125°C	-0.5							nA
Gate Operating Current ^a	I _G	V _{DG} = 10 V, I _D = 1 mA	-1							pA
Drain Cutoff Current	I _{D(off)}	V _{DS} = 10 V, V _{GS} = -8 V	1							
Gate-Source Forward Voltage	V _{GS(F)}	I _G = 1 mA, V _{DS} = 0 V	0.7							V
Dynamic										
Common-Source Forward Transconductance ^b	g _{fs}	V _{DS} = 15 V, V _{GS} = 0 V f = 1 kHz		4	12	6	12	7	12	mS
Common-Source Output Conductance	g _{os}				150		200		200	μS
Common-Source Input Capacitance	C _{iss}	V _{DS} = 15 V, V _{GS} = 0 V f = 1 MHz	4							pF
Common-Source Reverse Transfer Capacitance	C _{rss}		1.5							
Equivalent Input Noise Voltage	e _n	V _{DS} = 15 V, V _{GS} = 0 V f = 1 kHz	5							nV/ √Hz

Notes


- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
 b. Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.

NZF




TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)


Drain Current and Transconductance vs. Gate-Source Cutoff Voltage

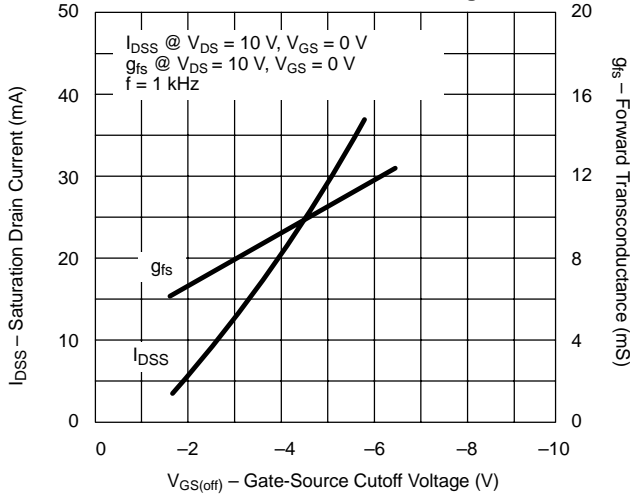


Gate Leakage Current

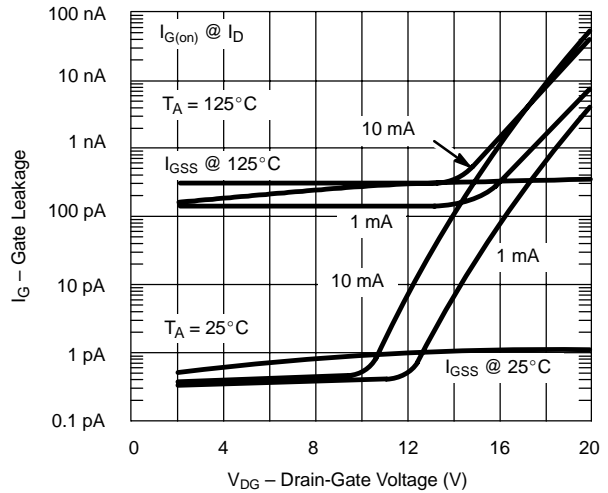


On-Resistance and Output Conductance vs. Gate-Source Cutoff Voltage

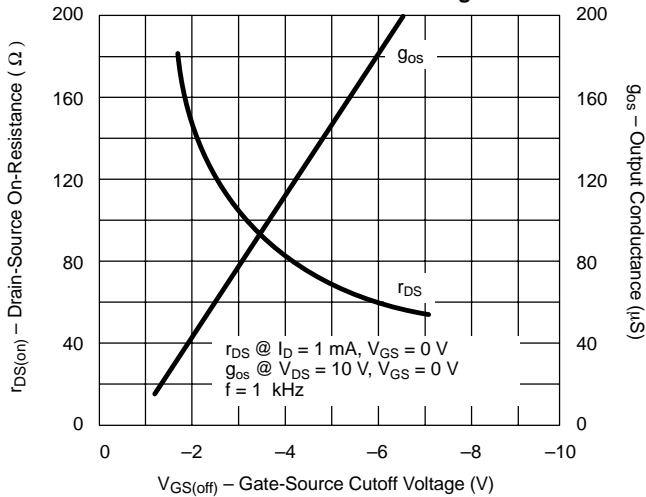


Common-Source Forward Transconductance vs. Drain Current

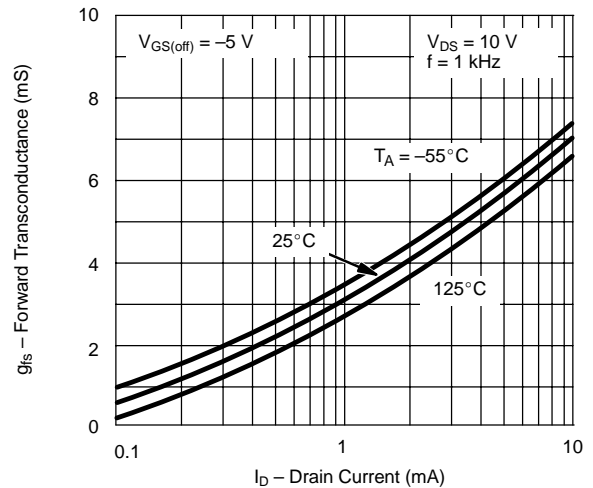







Output Characteristics

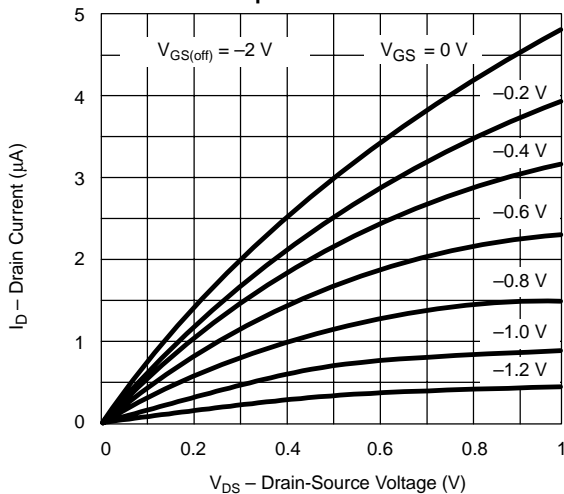

Output Characteristics






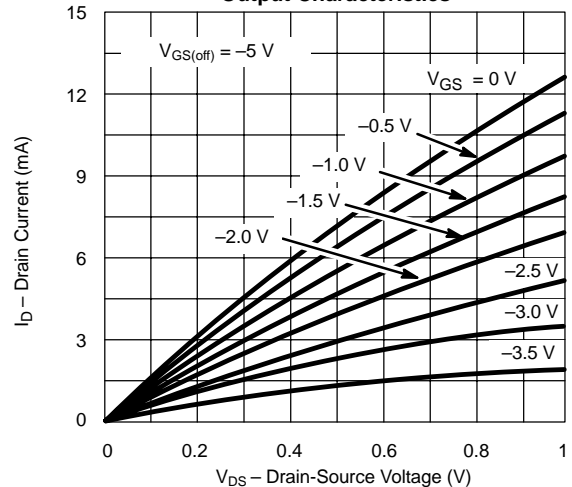


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

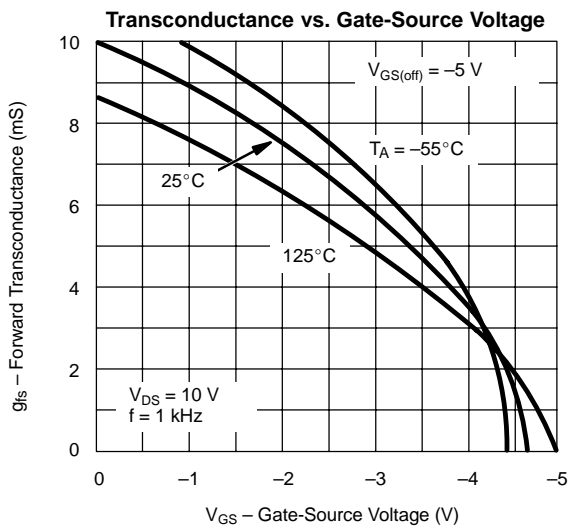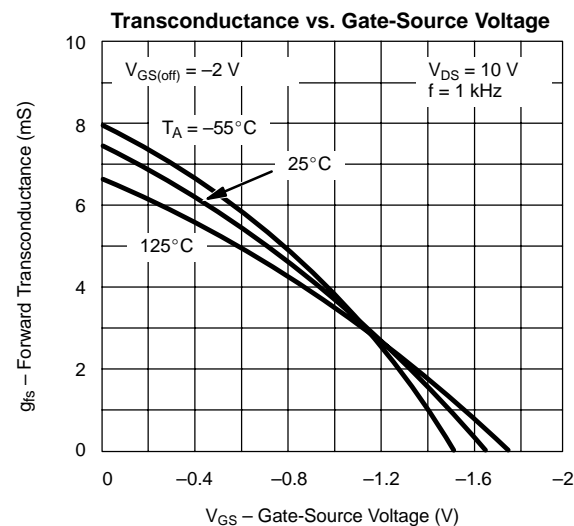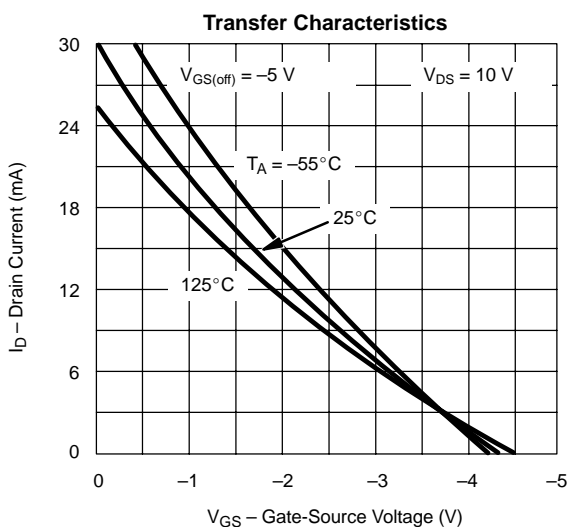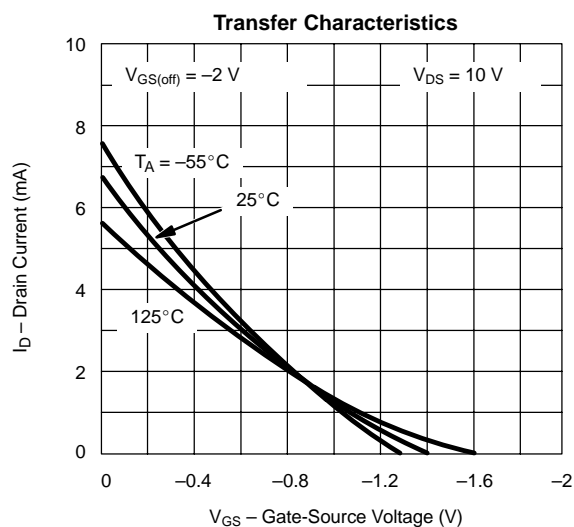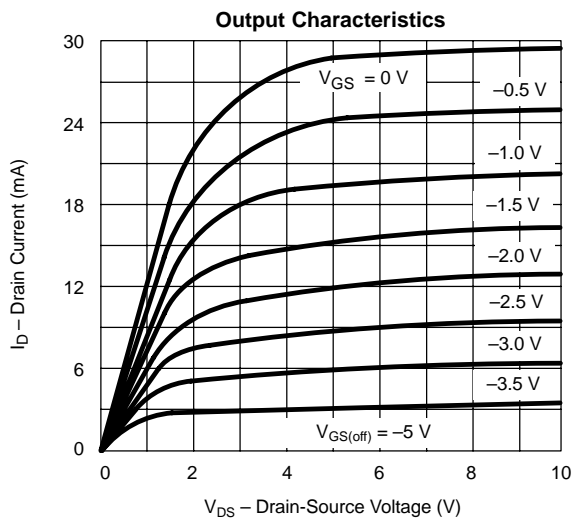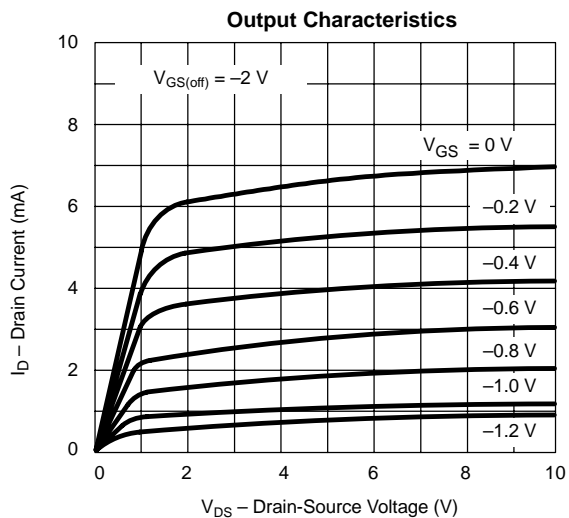







TYPICAL CHARACTERISTICS (T_A = 25°C UNLESS OTHERWISE NOTED)

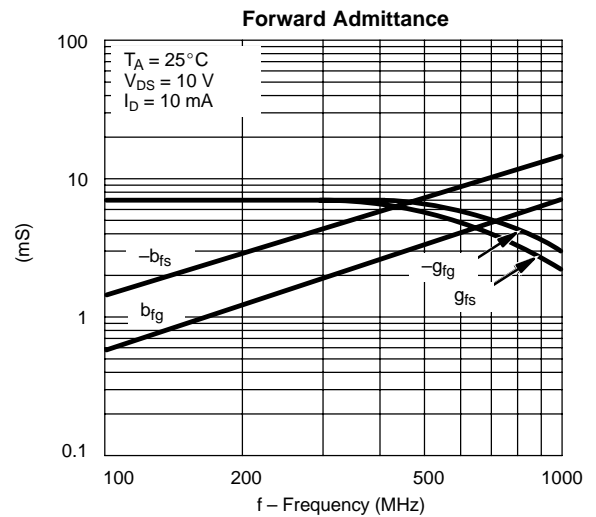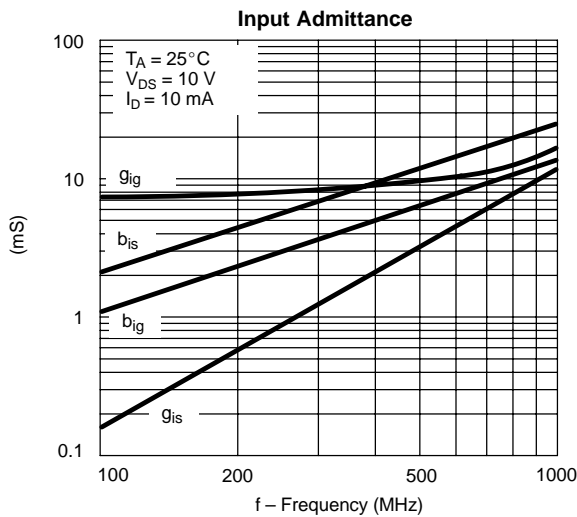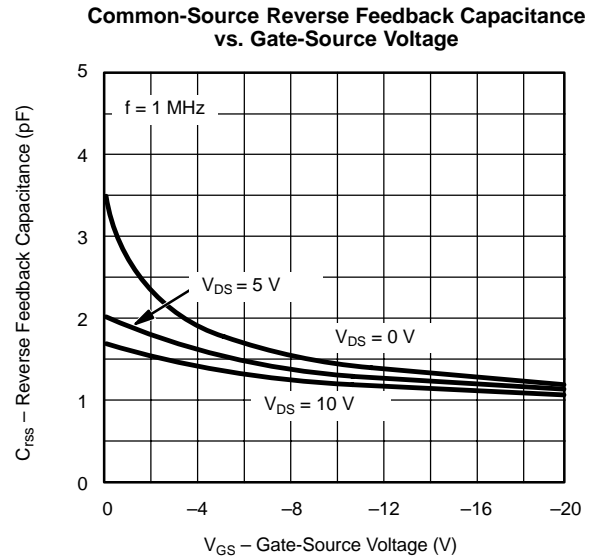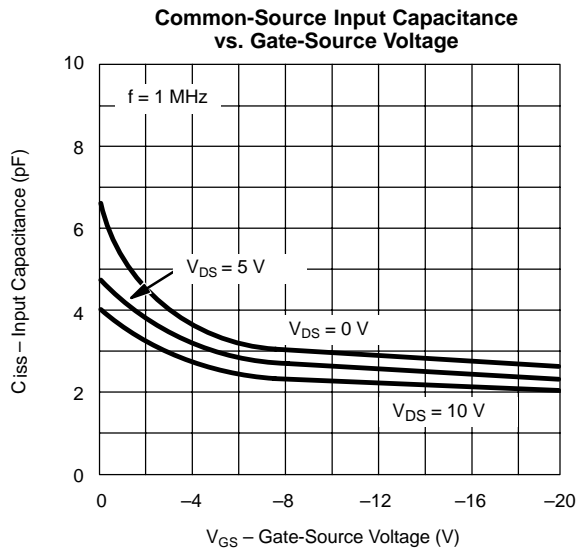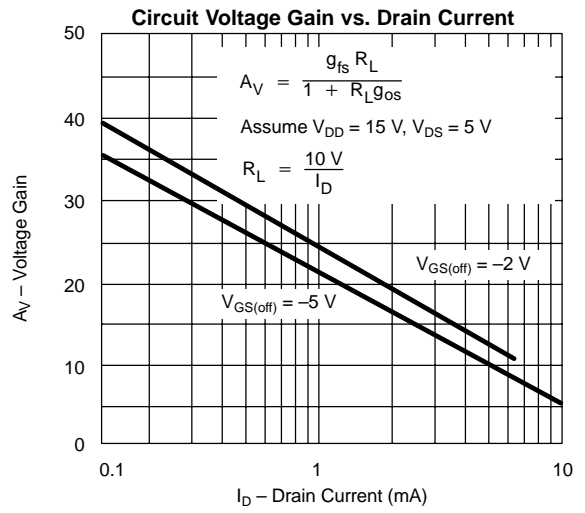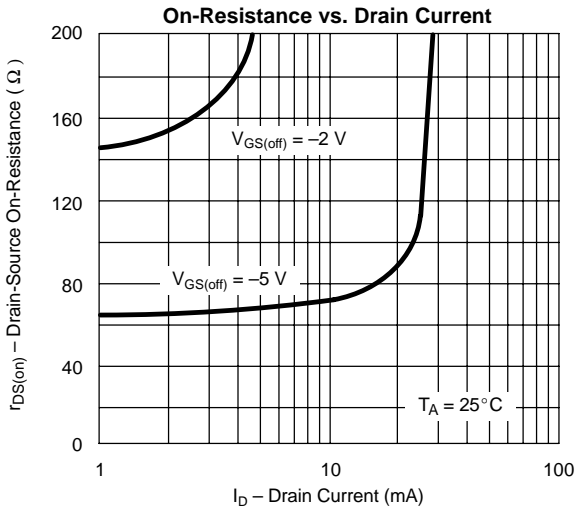



TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

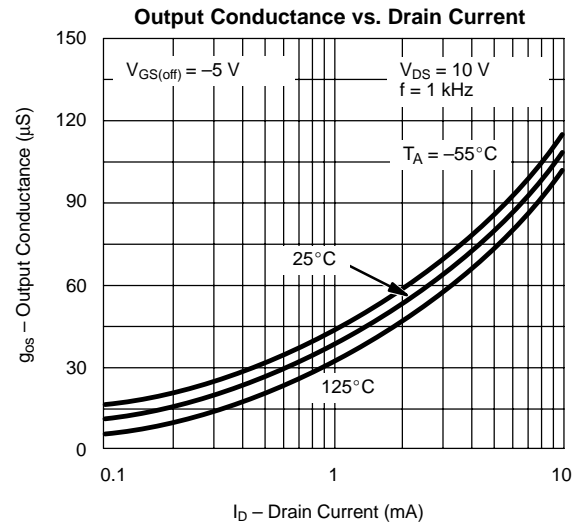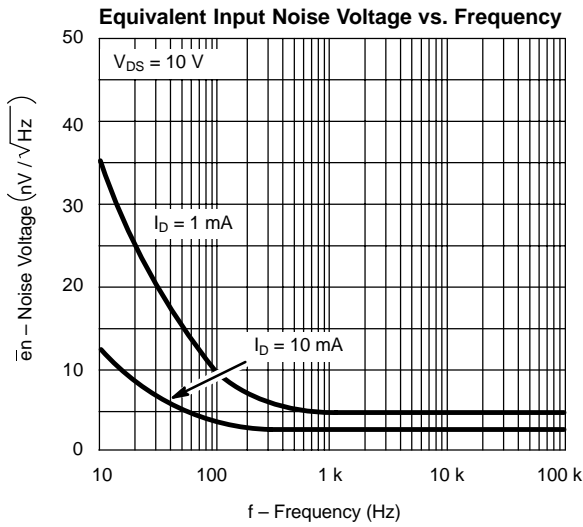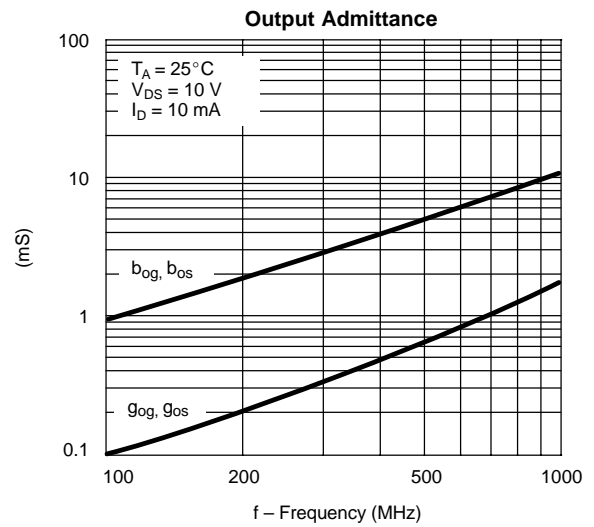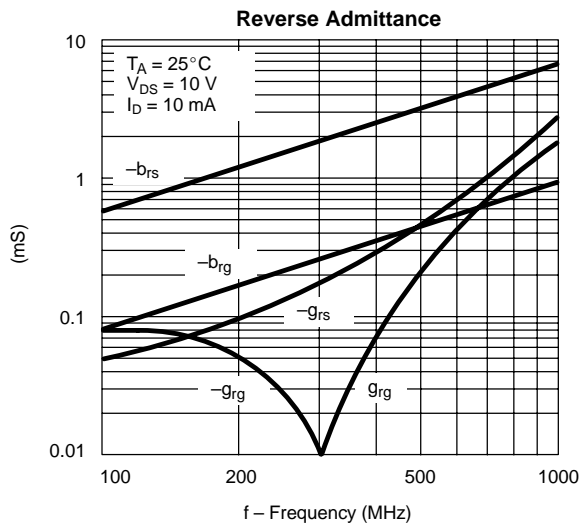



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.