


# VRYA6

### OUTLINE DIMENSIONS

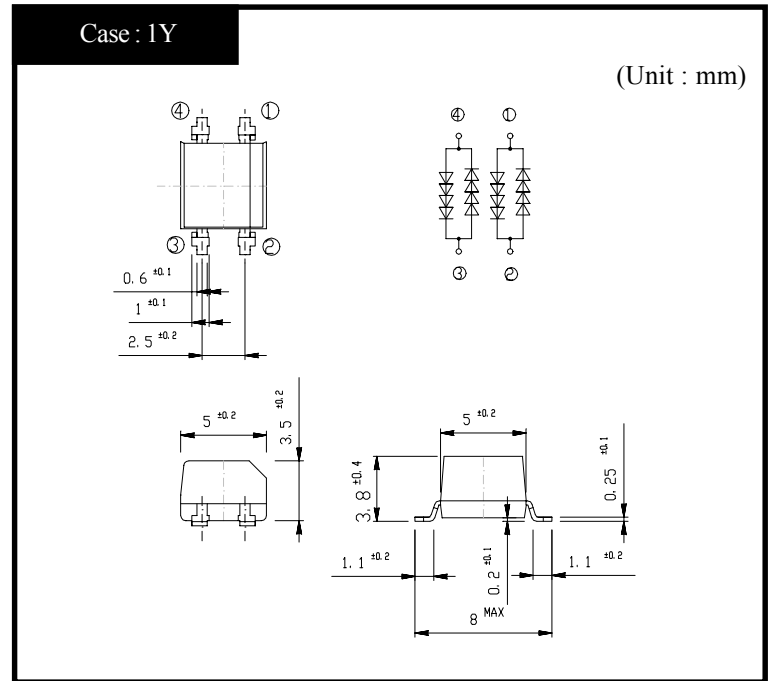

### RATINGS

#### ● Absolute Maximum Ratings


| Item                              | Symbol           | Conditions   | Ratings | Unit  |
|-----------------------------------|------------------|--|---------|-------|
| Storage Temperature               | T <sub>stg</sub> |  | -30~125 | °C    |
| Junction Temperature              | T <sub>j</sub>   |  | 125     | °C    |
| Average Rectified Forward Current | I <sub>O</sub>   | T <sub>a</sub> = 40°C, Sine wave, R-load, Commercial frequency, On alumina substrate, 1 element operation      | 310     | mArms |
|                                   |                  | T <sub>a</sub> = 40°C, Sine wave, R-load, Commercial frequency, On alumina substrate, 2 elements operation     | 200     |       |
|                                   |                  | T <sub>a</sub> = 40°C, Sine wave, R-load, Commercial frequency, On glass-epoxy substrate, 1 element operation  | 200     |       |
|                                   |                  | T <sub>a</sub> = 40°C, Sine wave, R-load, Commercial frequency, On glass-epoxy substrate, 2 elements operation | 130     |       |
| Peak Surge Forward Current        | I <sub>FSM</sub> | 50Hz, Sine wave, Non-repetitive, 2 elements series operation   | 8       | Arms  |
|                                   |                  | 10/200 μs, Non-repetitive, 2 elements series operation   | 65      | A     |
|                                   |                  | 10/1000 μs, Non-repetitive, 2 elements series operation  | 30      | A     |

#### ● Electrical Characteristics (T<sub>I</sub>=25°C)

| Item                 | Symbol          | Conditions  | Ratings   | Unit |
|----------------------|-----------------|---|-----------|------|
| Forward Voltage      | V <sub>F</sub>  | I <sub>F</sub> = 1mA, 1 element                                     | 2.05~2.55 | V    |
|                      |                 | I <sub>F</sub> = 1mA, 2 elements series                             | 4.10~5.10 |      |
|                      |                 | I <sub>F</sub> = 10mA, 1 element                                    | 2.50~3.00 |      |
|                      |                 | I <sub>F</sub> = 10mA, 2 elements series                            | 5.00~6.00 |      |
|                      |                 | I <sub>F</sub> = 70mA, 1 element                                    | 2.85~3.35 |      |
|                      |                 | I <sub>F</sub> = 70mA, 2 elements series                            | 5.70~6.60 |      |
| Junction Capacitance | C <sub>j</sub>  | f = 100kHz, V <sub>D</sub> = 0V, OSC = 50mV                         | TYP 13    | pF   |
| Thermal Resistance   | θ <sub>ja</sub> | Junction to ambient, On alumina substrate, 1 element operation      | MAX 90    | °C/W |
|                      |                 | Junction to ambient, On alumina substrate, 2 elements operation     | MAX 150   |      |
|                      |                 | Junction to ambient, On glass-epoxy substrate, 1 element operation  | MAX 150   |      |
|                      |                 | Junction to ambient, On glass-epoxy substrate, 2 elements operation | MAX 250   |      |


# VR YA6

## Forward Voltage

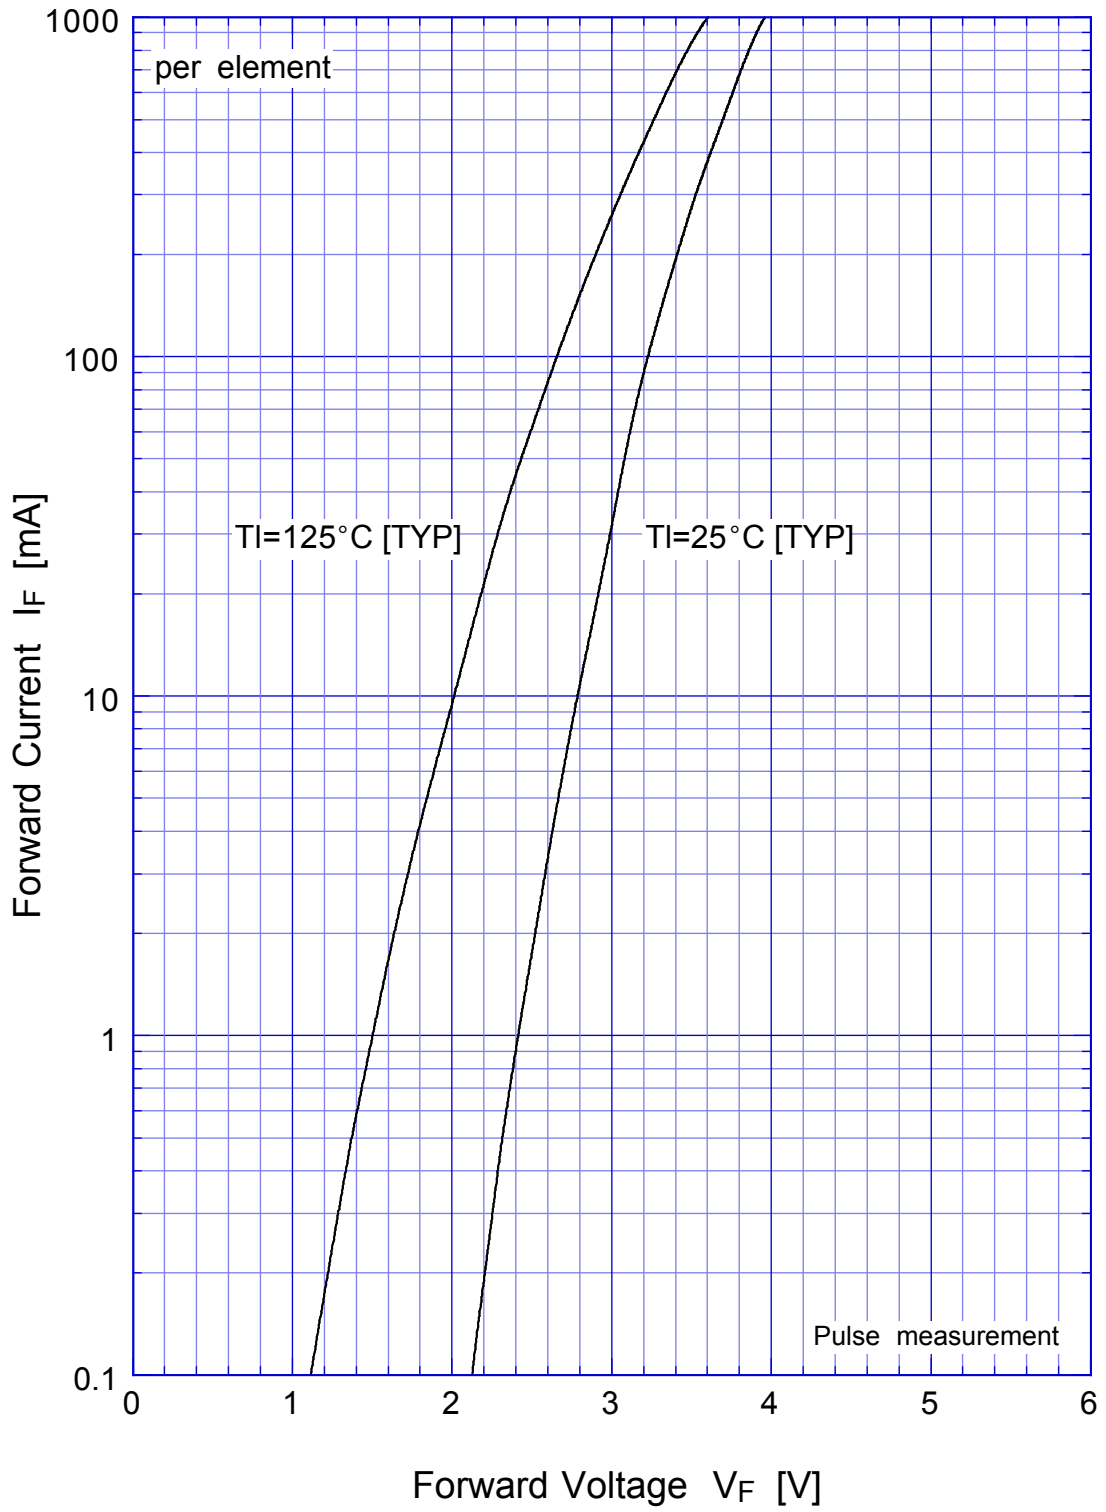


# VR YA6

## Forward Power Dissipation

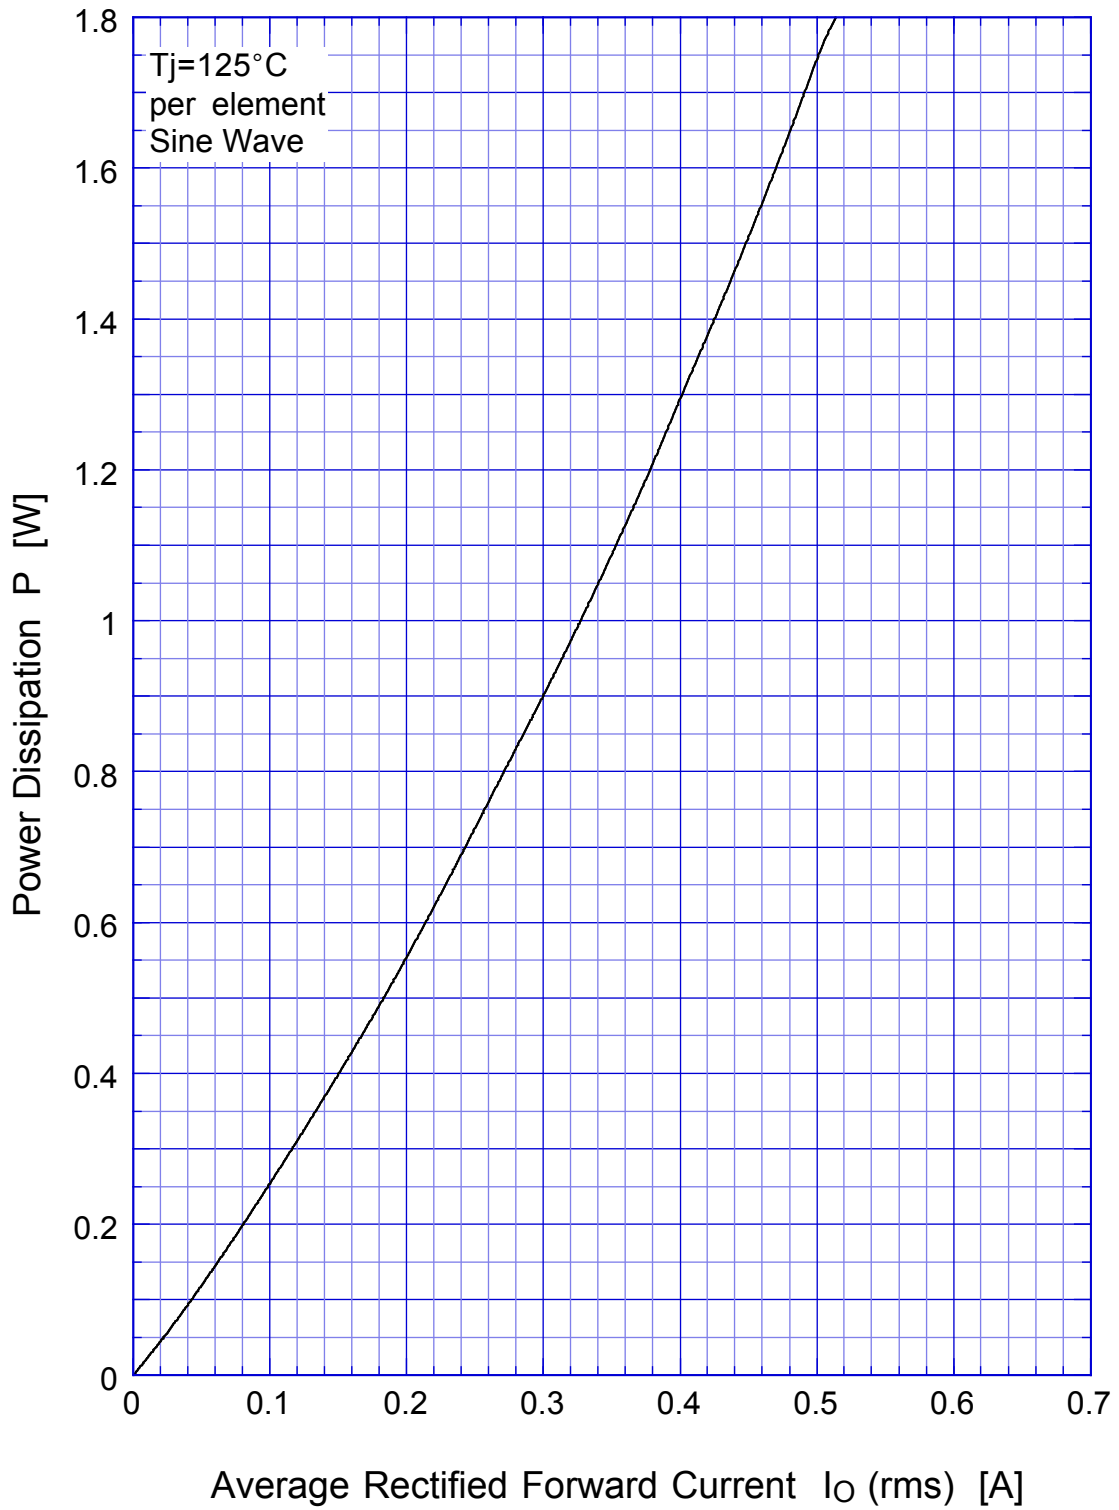


# VRYA6

# Derating Curve

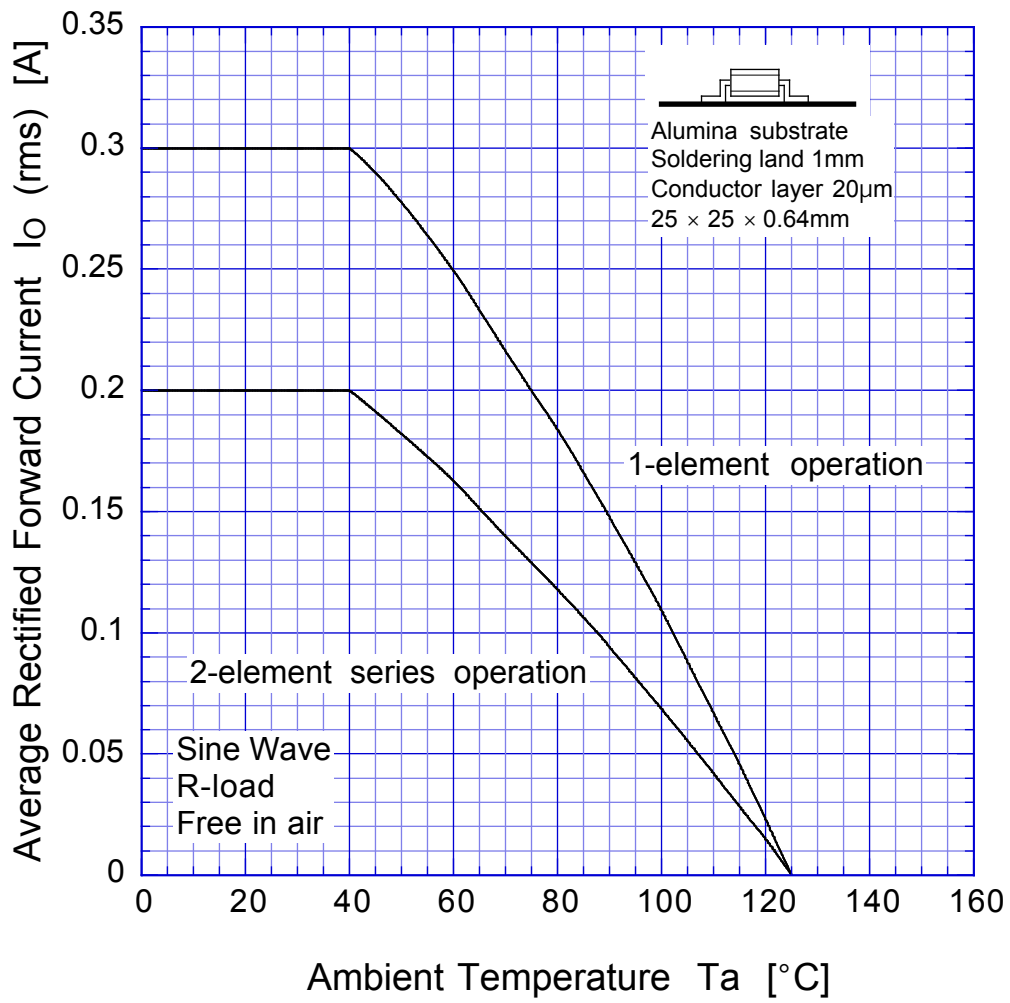


# VRYA6

# Derating Curve

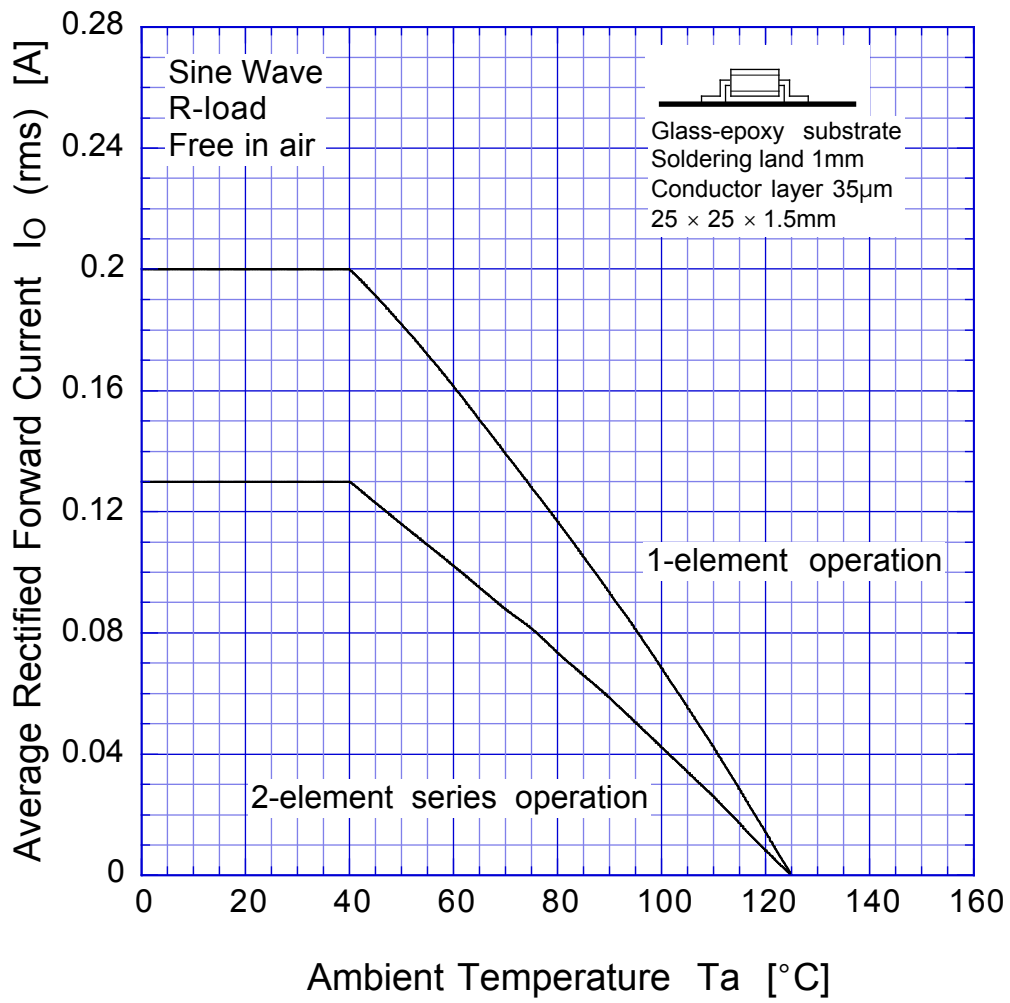

# VR YA6

## Peak Surge Forward Capability

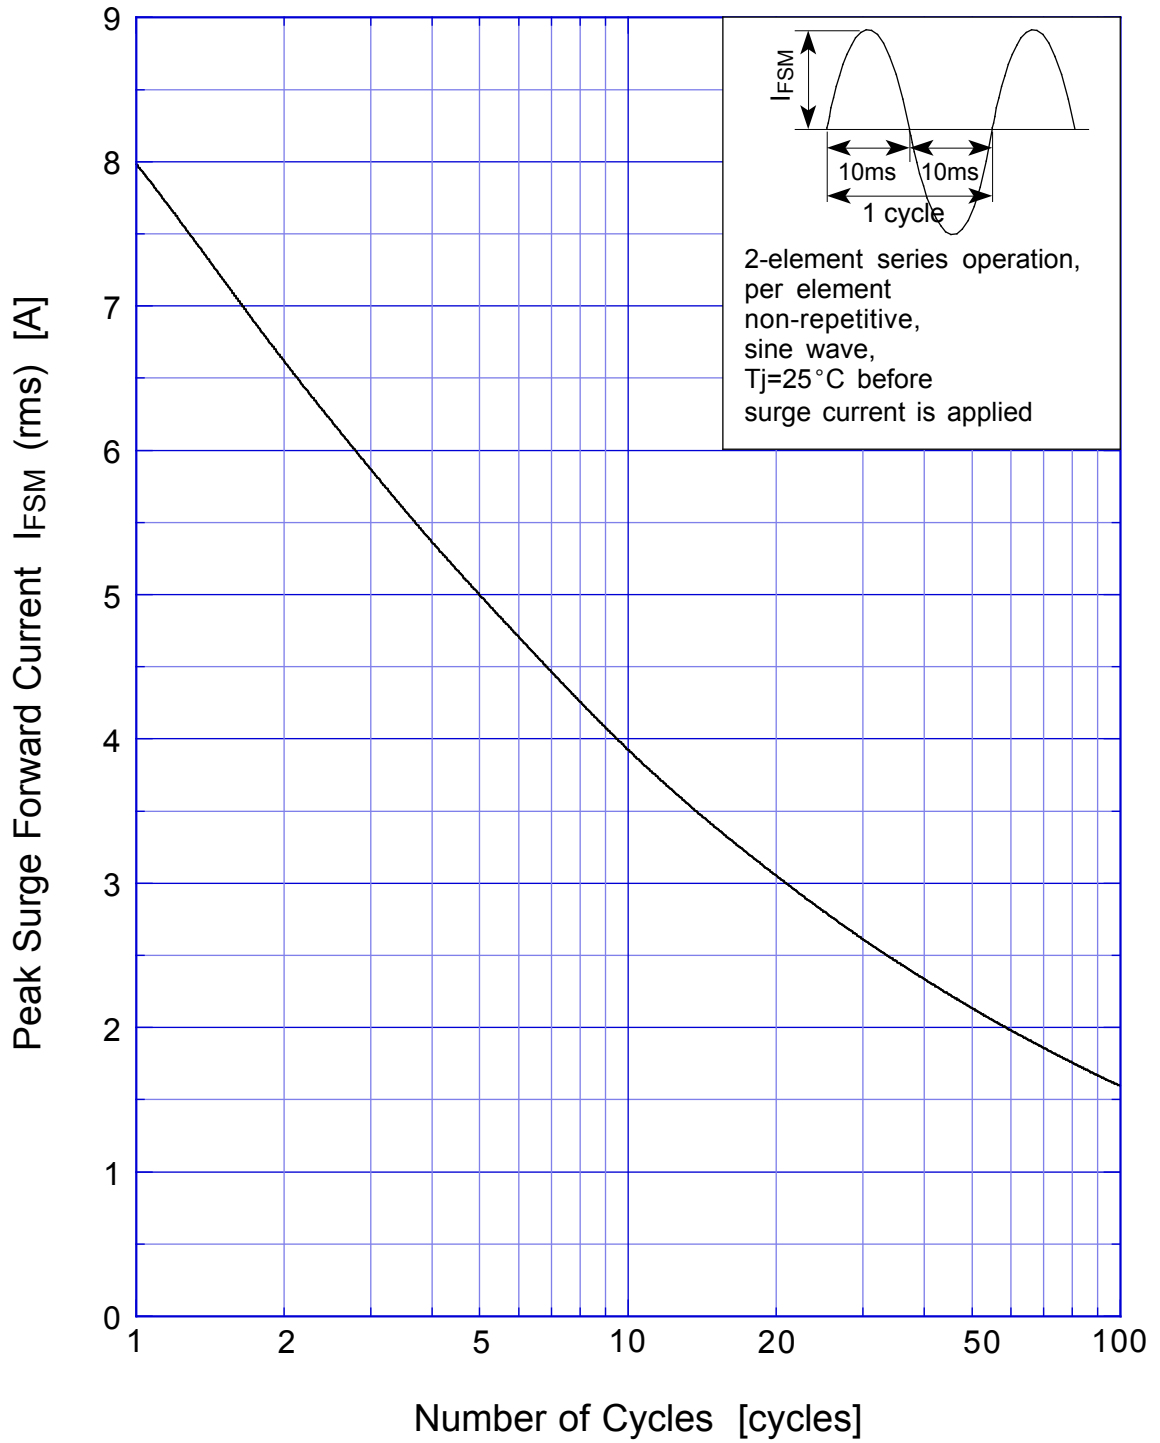

# VR YA6

## Junction Capacitance

