

**34-75 V**  
Continuous Input

**100 V**  
Transient Input

**1.2-15 V**  
Outputs

**50 W**  
Max Power

**2250 Vdc**  
Isolation

**Sixteenth-brick**  
DC-DC Converter

The InQor® Sixteenth-brick converter series is composed of next-generation, board-mountable, isolated, fixed switching frequency dc-dc converters that use synchronous rectification to achieve extremely high power conversion efficiency. Each module is supplied completely encased to provide protection from the harsh environments seen in many industrial and transportation applications.

## Operational Features

- High efficiency, up to 88% at full load
- Delivers full power with conductive cooling through integral baseplate
- Operating input voltage range: 34-75 Vdc
- Fixed frequency switching provides predictable EMI
- No minimum load requirement

## Mechanical Features

- Industry standard Sixteenth-brick pin-out configuration
- Size: 1.436" x 1.036" x 0.500" (36.47 x 26.31 x 12.70 mm)
- Total weight: 1.1 oz (31 g)
- Flanged baseplate version available

## Control Features

- On/Off control referenced to input side
- Remote sense for improved output voltage control
- Wide output voltage trim range

## Safety Features

- UL 60950-1/R:2011-12 Basic Insulation
- CAN/CSA-C22.2 No. 60950-1/A1:2011
- EN 60950-1/A2:2013
- RoHS compliant (see last page)



## Protection Features

- Input under-voltage lockout
- Output current limit and short circuit protection
- Active back drive current limit
- Output over-voltage protection
- Thermal shutdown

## CONTENTS

	Page No.
Family Electrical Characteristics .....	2
1.2Vout Electrical Characteristics & Figures .....	4
1.5Vout Electrical Characteristics & Figures .....	6
1.8Vout Electrical Characteristics & Figures .....	8
2.5Vout Electrical Characteristics & Figures .....	10
3.3Vout Electrical Characteristics & Figures .....	12
5.0Vout Electrical Characteristics & Figures .....	14
7.0Vout Electrical Characteristics & Figures .....	16
12Vout Electrical Characteristics & Figures .....	18
15Vout Electrical Characteristics & Figures .....	20
Application Section .....	22
Standards & Qualification Testing .....	26
Standard Mechanical Diagram .....	27
Flanged Mechanical Diagram .....	28
Ordering Information .....	29

## IQ48 Family Electrical Characteristics (all output voltages)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.


Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>ABSOLUTE MAXIMUM RATINGS</b>					
Input Voltage					
Non-Operating	-1		100	V	Continuous
Operating			75	V	Continuous
Operating Transient			100	V	100 ms
Isolation Voltage					
Input to Output			2250	Vdc	
Input to Baseplate			2250	Vdc	
Output to Baseplate			2250	Vdc	
Operating Temperature	-40		100	°C	Baseplate temperature
Storage Temperature	-45		125	°C	
Voltage at ON/OFF input pin	-2		8	V	
<b>INPUT CHARACTERISTICS</b>					
Operating Input Voltage Range	34	48	75	V	
Input Under-Voltage Lockout					
Turn-On Voltage Threshold	31.2	32.5	33.8	V	
Turn-Off Voltage Threshold	28.9	30.5	32.2	V	
Lockout Voltage Hysteresis		2.0		V	
Recommended External Input Capacitance		100		μF	Typical ESR 0.1-0.2 Ω; see Note 3
Input Filter Component Values (L\ C)		1.0\ 2.35		μH\ μF	Internal values; see Figure D
<b>DYNAMIC CHARACTERISTICS</b>					
Turn-On Transient					
Turn-On Time		28		ms	Full load, Vout = 90 % nom. (from enable)
Start-Up Inhibit Time	180	200	250	ms	Figure E; See Note 2
Power-Up Inhibit Time		2		ms	Figure E
Output Voltage Overshoot		0		%	Maximum Output Capacitance
<b>ISOLATION CHARACTERISTICS</b>					
Isolation Voltage (dielectric strength)					See Absolute Maximum Ratings
Isolation Resistance		30		MΩ	
Isolation Capacitance (input to output)		1000		pF	See Note 1
<b>TEMPERATURE LIMITS FOR POWER DERATING CURVES</b>					
Semiconductor Junction Temperature			125	°C	Package rated to 150 °C
PCB Temperature			125	°C	UL rated max operating temp 130 °C
Transformer Temperature			125	°C	
Maximum Baseplate Temperature, Tb			100	°C	
<b>FEATURE CHARACTERISTICS</b>					
Switching Frequency		350		kHz	
ON/OFF Control					
Off-State Voltage	2.4		8	V	
On-State Voltage	-2		0.8		
ON/OFF Control					Application notes Figures A & B
Pull-Up Voltage		5		V	
Pull-Up Resistance		10		kΩ	
Over-Temperature Shutdown OTP Trip Point		125		°C	Average PCB Temperature
Over-Temperature Shutdown Restart Hysteresis		10		°C	
<b>RELIABILITY CHARACTERISTICS</b>					
Calculated MTBF (Telcordia) TR-NWT-000332		3.90		10 <sup>6</sup> Hrs.	Tb = 70 °C
Calculated MTBF (MIL-217) MIL-HDBK-217F		3.50		10 <sup>6</sup> Hrs.	Tb = 70 °C
Field Demonstrated MTBF				10 <sup>6</sup> Hrs.	See our website for details

Note 1: Higher values of isolation capacitance can be added externally to the module.


Note 2: Maximum value is 400 ms for DC current limit and short circuit fault conditions

Note 3: See "Input System Instability" in the Application Considerations section.


## Family Figures (all output voltages)

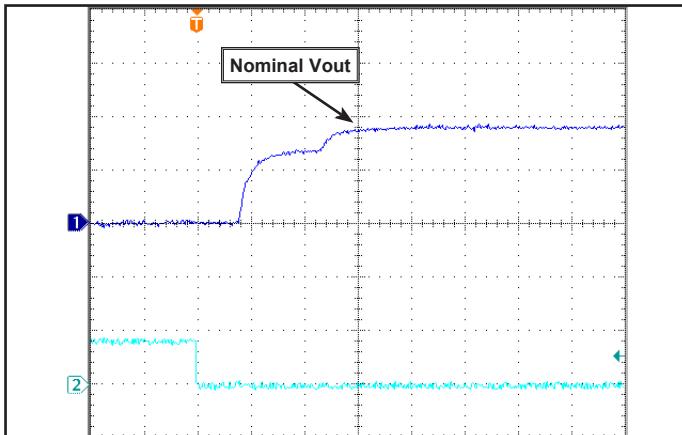


Common Figure 1: Typical startup waveform. Input voltage pre-applied, ON/OFF Pin on Ch 2.

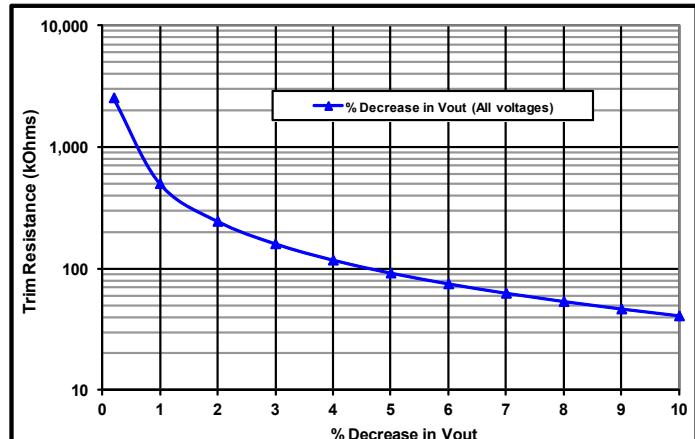

Common Figure 2: Trim graph for trim down.

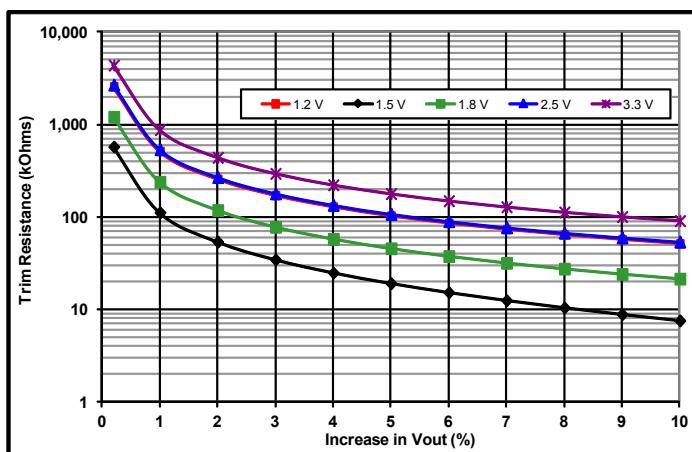

Common Figure 3: Trim graph for trim-up 1.2 to 3.3V outputs.

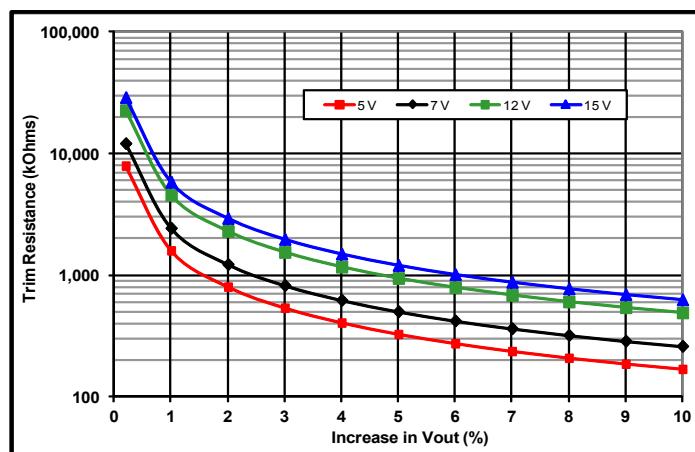

Common Figure 4: Trim graph for trim-up 5 to 15V outputs.



## Technical Specification

**Input:34-75 V**

**Output:1.2 V**

**Current:25 A**

**Part No.:IQ48012SMx25**

### IQ48012SMx25 Electrical Characteristics (1.2 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			1.6	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		40	50	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.02		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		30		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 4
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	1.188	1.200	1.212	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-18		18	mV	
Total Output Voltage Range	1.170		1.230	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		40	80	mV	Full load
RMS		10	20	mV	Full load
Operating Output Current Range	0		25	A	Subject to thermal derating
Output DC Current Limit Inception	27.5	30.0	32.5	A	
Back-Drive Current Limit while Enabled		1.2		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			10,000	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		60		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		100		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; see Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	1.4	1.6	1.8	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		80		%	See Figure 1 for efficiency curve
50 % Load		80		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Safety certification requires the use of a fuse rated at or below this value.

**Input: 34-75 V**

**Output: 1.2 V**

**Current: 25 A**

**Part No.: IQ48012SMx25**

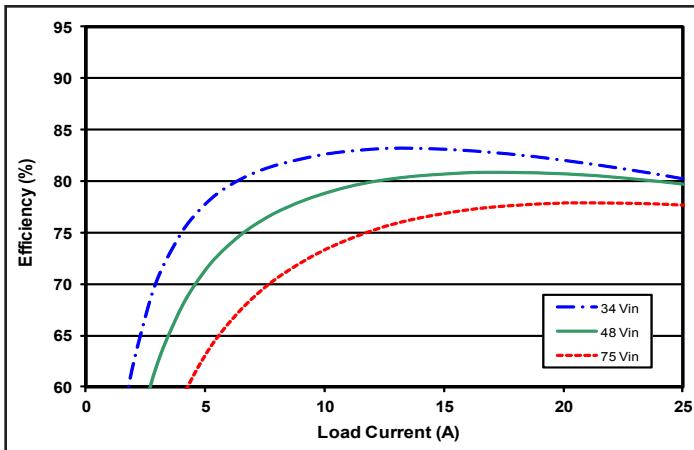


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

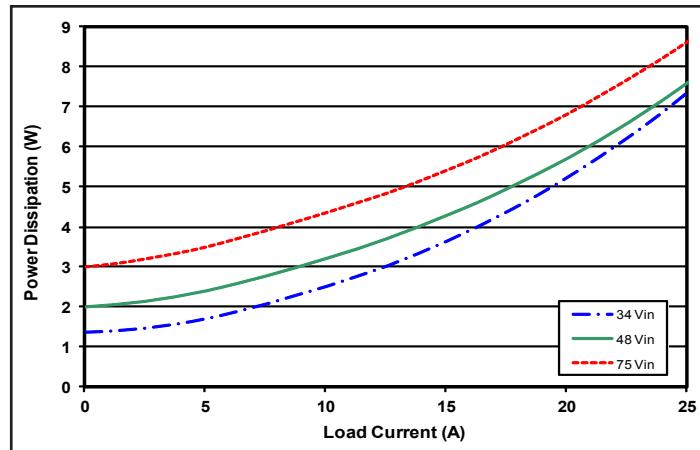


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

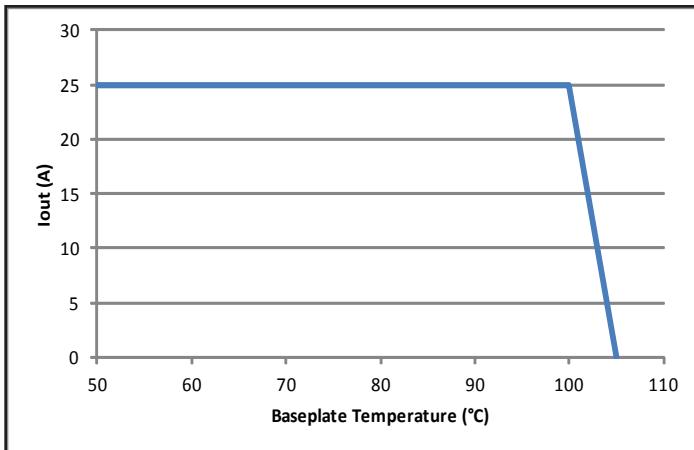


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

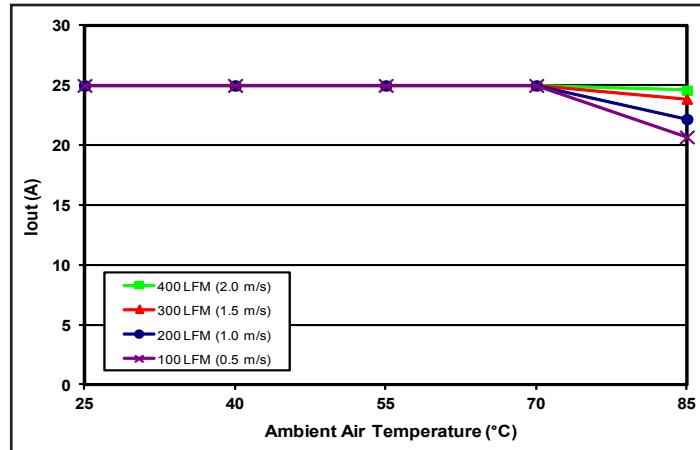


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

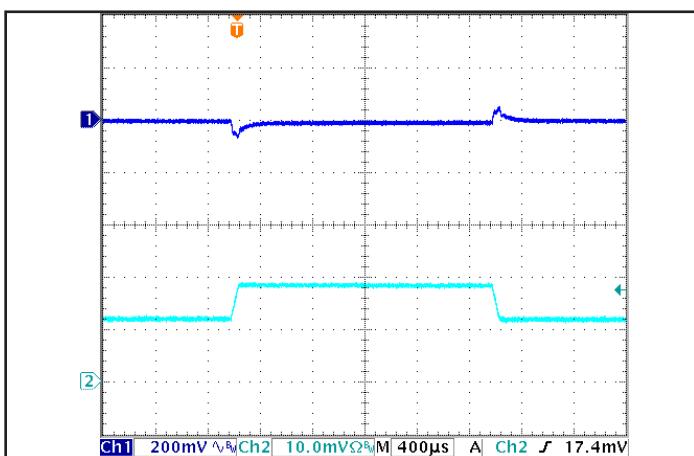


Figure 5: Output voltage response to step-change in load current (50% -75% -50% of Iout(max);  $dI/dt = 0.1 A/\mu s$ ). Load cap: 100  $\mu F$  electrolytic capacitor. Ch 1: Vout (200 mV/div), Ch 2: Iout (10 A/div).

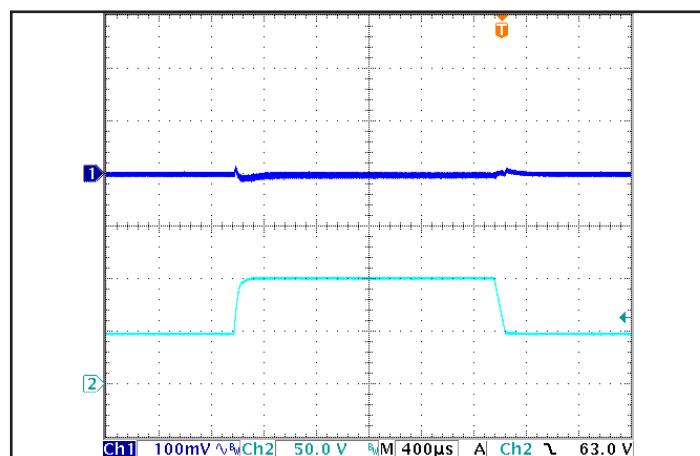


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu F$ , electrolytic output capacitance. Ch 1: Vout (100 mV/div), Ch 2: Vin (10 V/div).



## Technical Specification

**Input: 34-75 V**

**Output: 1.5 V**

**Current: 25 A**

**Part No.: IQ48015SMx25**

### IQ48015SMx25 Electrical Characteristics (1.5 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			1.9	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		48	60	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.05		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		35		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 4
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	1.485	1.500	1.515	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-23		23	mV	
Total Output Voltage Range	1.462		1.538	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		25	50	mV	Full load
RMS		6	10	mV	Full load
Operating Output Current Range	0		25	A	Subject to thermal derating
Output DC Current Limit Inception	27.5	30.0	32.5	A	
Back-Drive Current Limit while Enabled		1.5		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			10,000	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		80		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		40		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; See Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	1.7	1.9	2.1	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		83		%	See Figure 1 for efficiency curve
50 % Load		82		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Safety certification requires the use of a fuse rated at or below this value.

**Input: 34-75 V**

**Output: 1.5 V**

**Current: 25 A**

**Part No.: IQ48015SMx25**

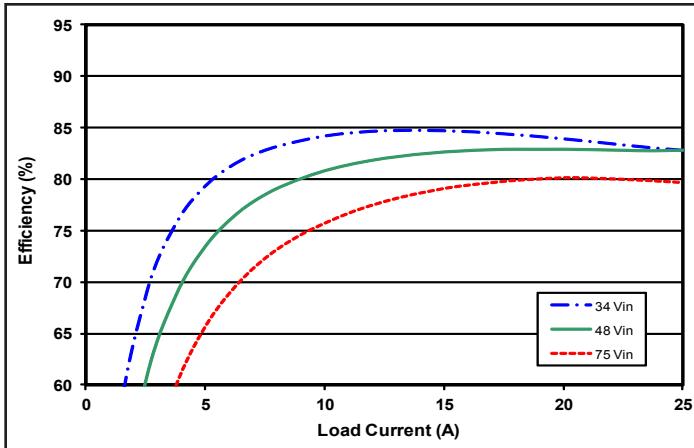


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

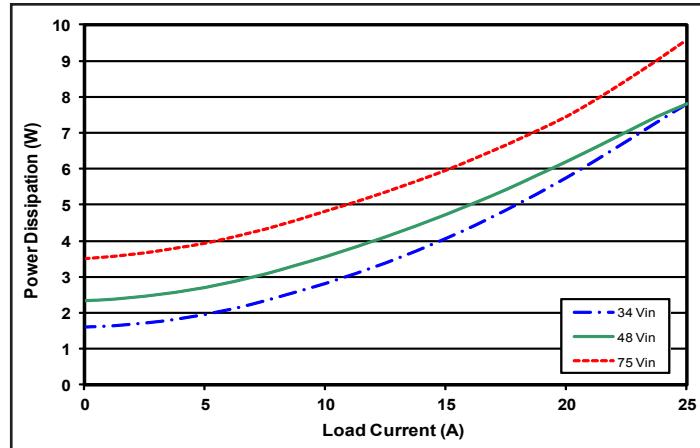


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

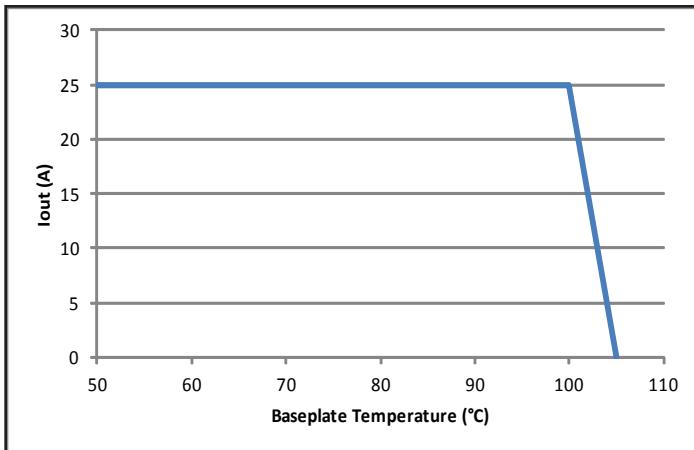


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

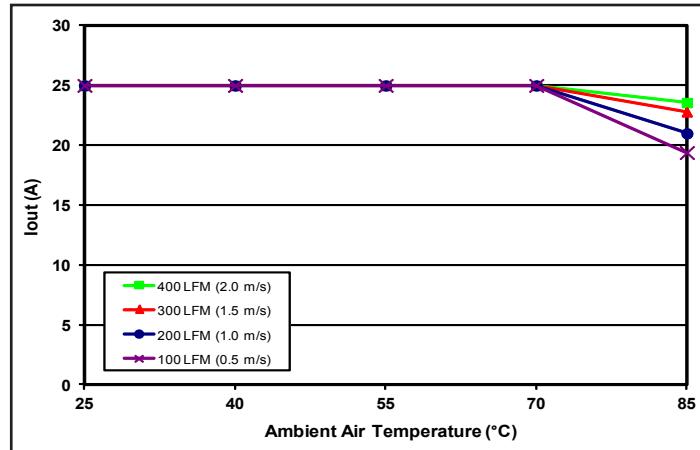


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

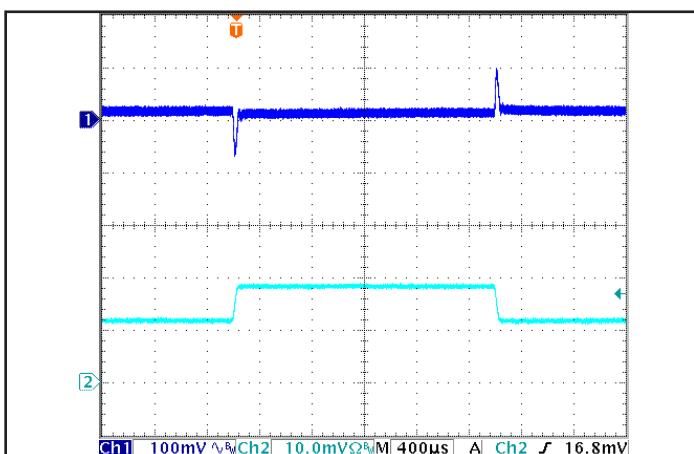


Figure 5: Output voltage response to step-change in load current (50 % -75 % -50 % of  $I_{out}(max)$ ;  $dI/dt = 0.1 A/\mu s$ ). Load cap: 100  $\mu F$  electrolytic capacitor. Ch 1:  $V_{out}$  (100 mV/div), Ch 2:  $I_{out}$  (10 A/div).

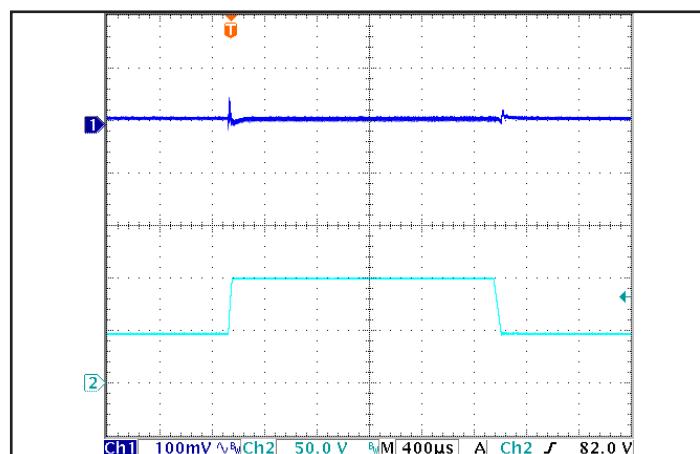


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu F$  electrolytic output capacitance. Ch 1:  $V_{out}$  (100 mV/div), Ch 2:  $V_{in}$  (50 V/div).



## Technical Specification

**Input:34-75 V**

**Output:1.8 V**

**Current:25 A**

**Part No.:IQ48018SMx25**

### IQ48018SMx25 Electrical Characteristics (1.8 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			2.1	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		55	69	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.05		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		35		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 5
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	1.782	1.800	1.818	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-27		27	mV	
Total Output Voltage Range	1.755		1.845	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		30	60	mV	Full load
RMS		6	10	mV	Full load
Operating Output Current Range	0		25	A	Submect to thermal derating; See Note 4
Output DC Current Limit Inception	27.5	30.0	32.5	A	
Back-Drive Current Limit while Enabled		1.9		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			10,000	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		70		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		40		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; see Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	2.0	2.2	2.5	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		84		%	See Figure 1 for efficiency curve
50 % Load		84		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Maximum output current limited below 25 A for input voltages below 36 V

Note 5: Safety certification requires the use of a fuse rated at or below this value.

**Input: 34-75 V**

**Output: 1.8 V**

**Current: 25 A**

**Part No.: IQ48018SMx25**

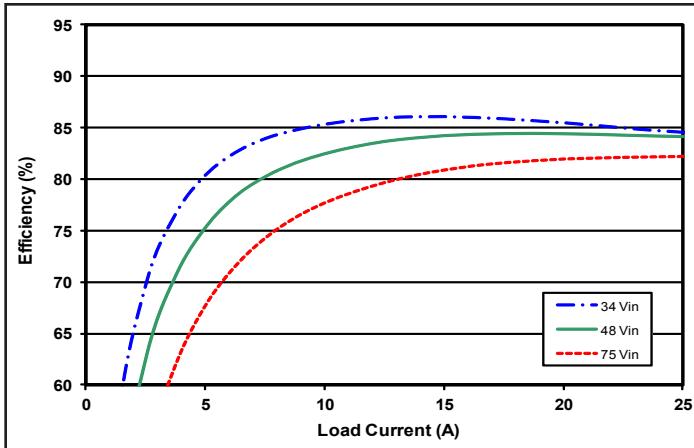


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

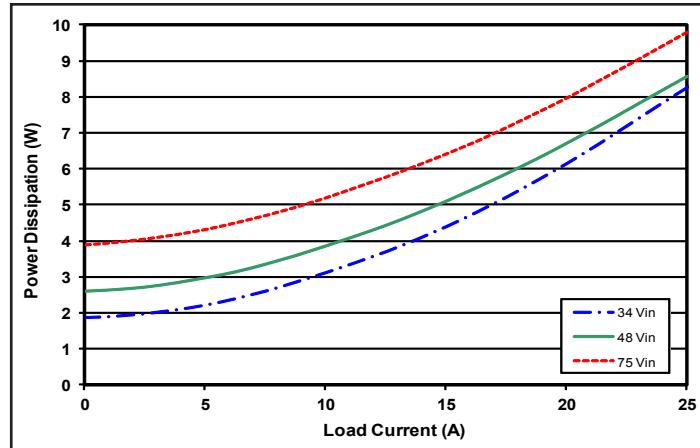


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

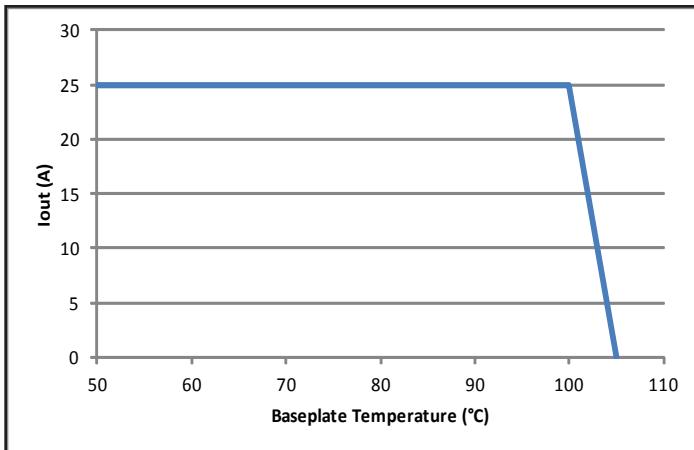


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

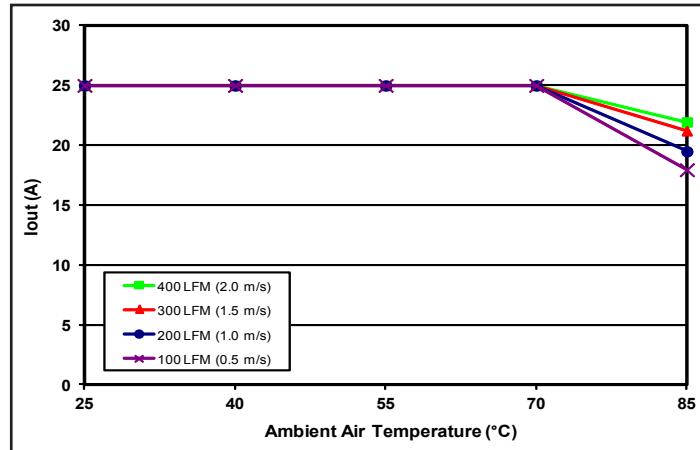


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

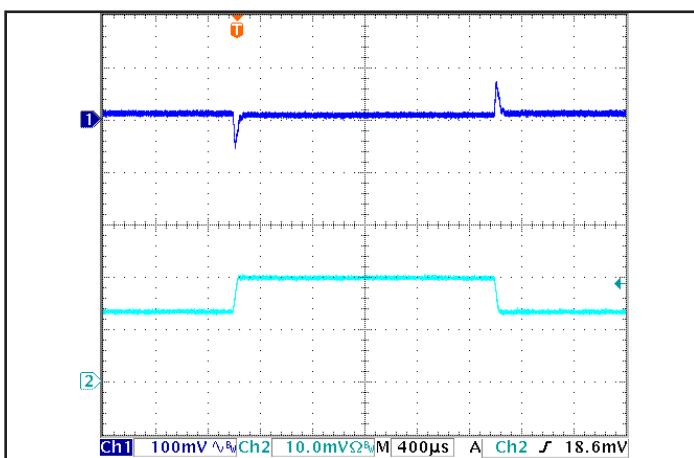


Figure 5: Output voltage response to step-change in load current (50 % -75 % -50 % of Iout(max);  $dl/dt = 0.1 A/\mu s$ ). Load cap: 100  $\mu F$  electrolytic capacitor. Ch 1: Vout (100 mV/div), Ch 2: Iout (10 A/div).

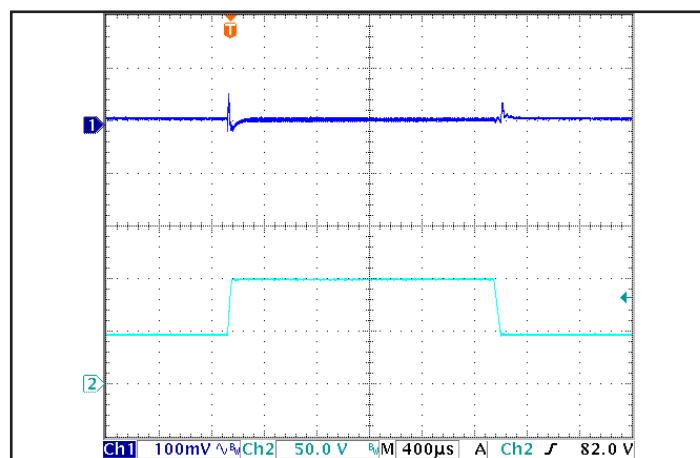


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu F$ , electrolytic output capacitance. Ch 1: Vout (100 mV/div), Ch 2: Vin (50 V/div).



## Technical Specification

**Input:34-75 V**

**Output:2.5 V**

**Current:20 A**

**Part No.:IQ48025SMx20**

### IQ48025SMx20 Electrical Characteristics (2.5 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			2.4	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		50	60	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.05		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		60		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 4
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	2.475	2.500	2.525	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-38		38	mV	
Total Output Voltage Range	2.437		2.563	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		25	50	mV	Full load
RMS		5	10	mV	Full load
Operating Output Current Range	0		20	A	Subject to thermal derating
Output DC Current Limit Inception	22.0	25.0	27.0	A	
Back-Drive Current Limit while Enabled		2.4		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			10,000	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		300		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		100		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; see Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	2.9	3.1	3.4	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		86		%	See Figure 1 for efficiency curve
50 % Load		85		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Safety certification requires the use of a fuse rated at or below this value.

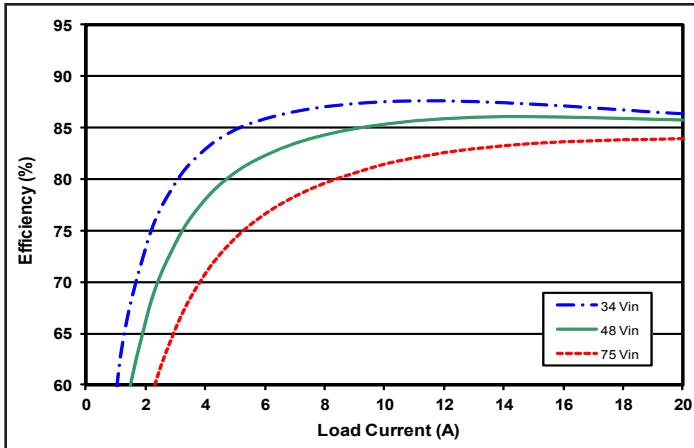


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

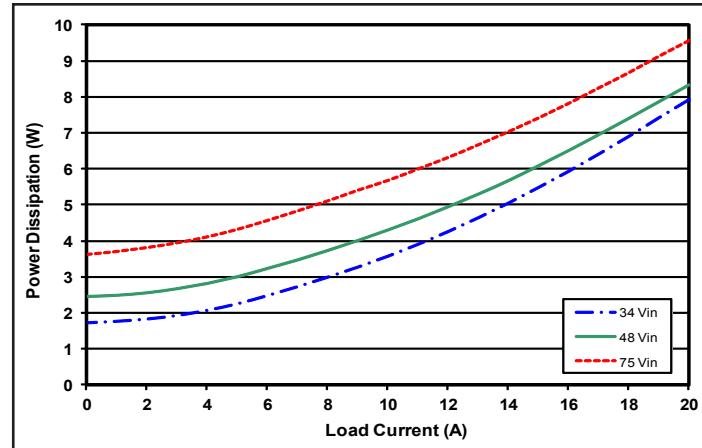


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

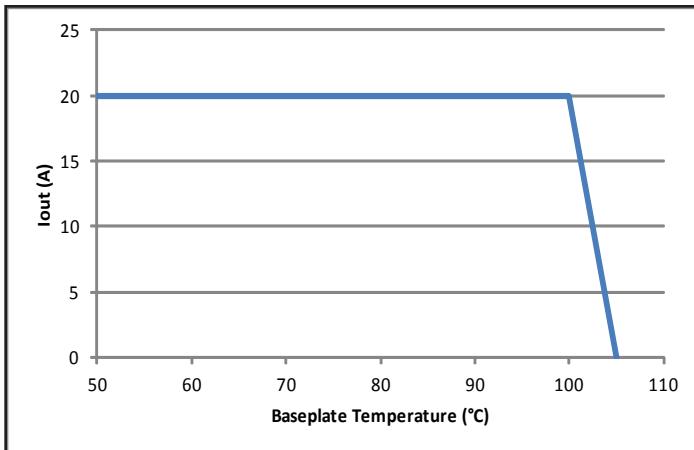


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

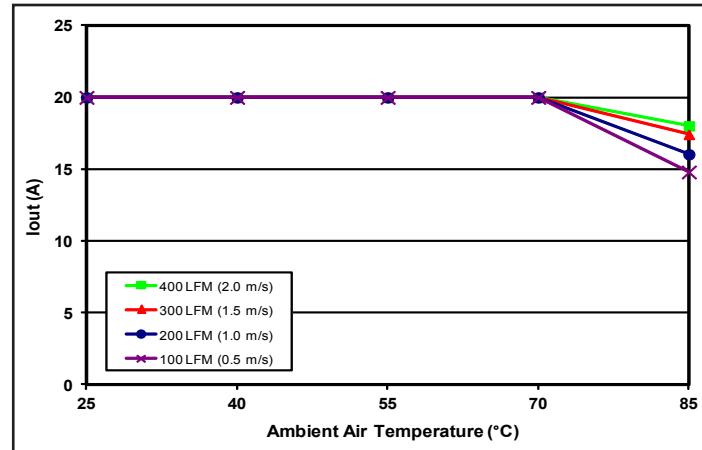


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

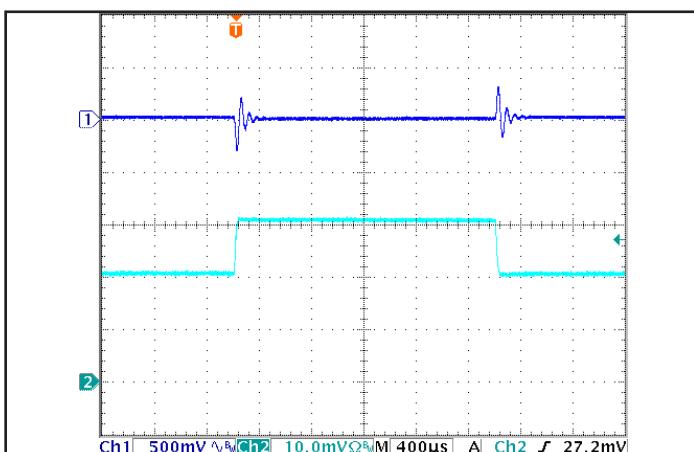


Figure 5: Output voltage response to step-change in load current (50% -75% -50% of Iout(max);  $dI/dt = 0.1 A/\mu s$ ). Load cap: 100  $\mu F$  electrolytic capacitor. Ch 1: Vout (500 mV/div), Ch 2: Iout (5 A/div).

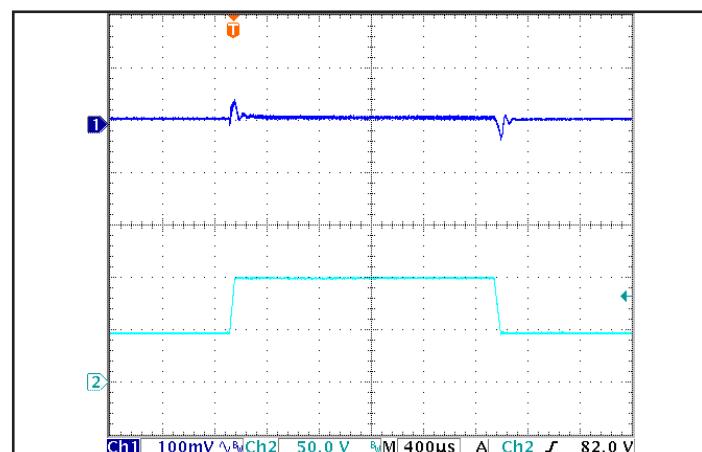


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu F$  electrolytic output capacitance. Ch 1: Vout (100 mV/div), Ch 2: Vin (50 V/div).



## Technical Specification

**Input: 34-75 V**

**Output: 3.3 V**

**Current: 15 A**

**Part No.: IQ48033SMx15**

### IQ48033SMx15 Electrical Characteristics (3.3 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			2.2	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		50	60	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.05		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		40		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 4
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	3.267	3.300	3.333	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-50		50	mV	
Total Output Voltage Range	3.217		3.383	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		35	70	mV	Full load
RMS		6	10	mV	Full load
Operating Output Current Range	0		15	A	Subject to thermal derating
Output DC Current Limit Inception	17.5	19.0	20.5	A	
Back-Drive Current Limit while Enabled		3.5		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			10,000	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		150		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		100		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; see Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	3.7	4.2	4.6	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		87		%	See Figure 1 for efficiency curve
50 % Load		86		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Safety certification requires the use of a fuse rated at or below this value.

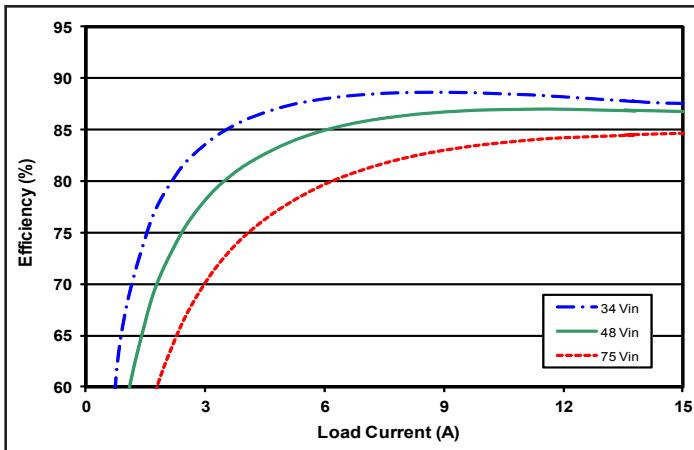


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

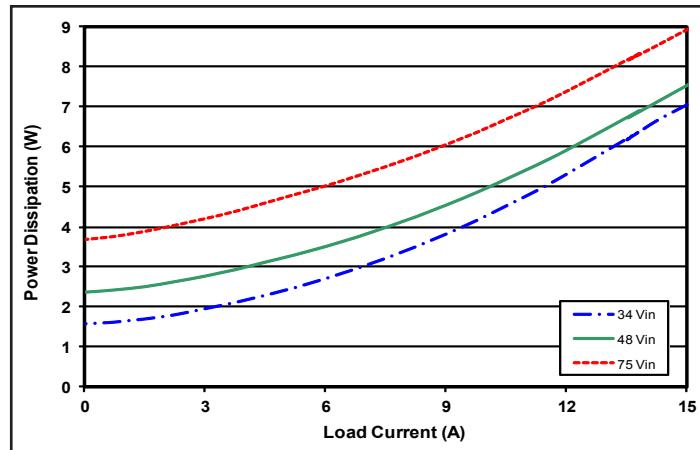


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

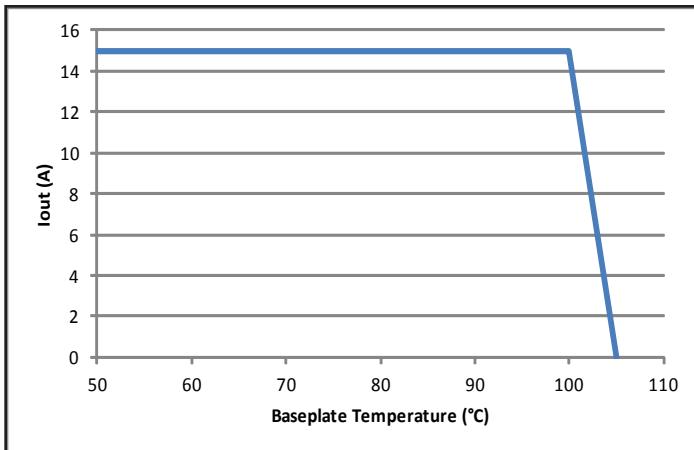


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

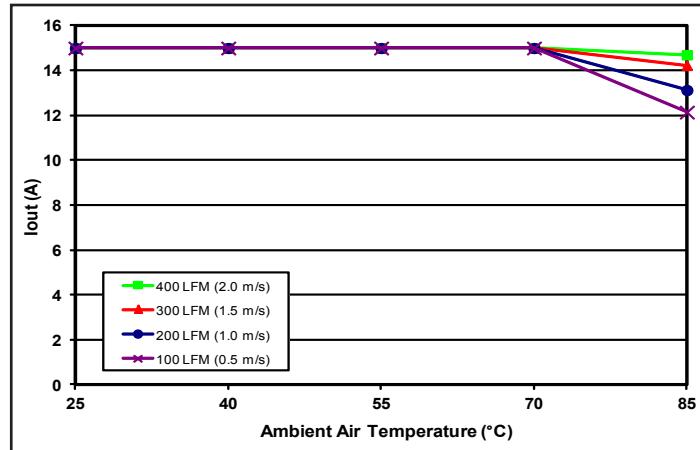


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

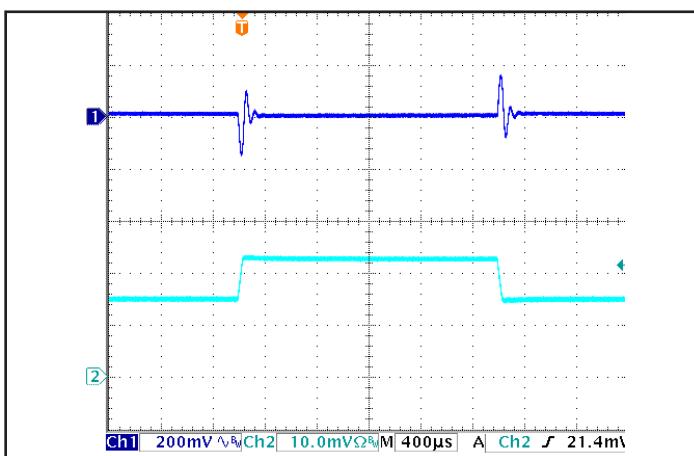


Figure 5: Output voltage response to step-change in load current (50% -75% -50% of Iout(max);  $dI/dt = 0.1 A/\mu s$ ). Load cap: 100  $\mu F$  electrolytic capacitor. Ch 1: Vout (200 mV/div), Ch 2: Iout (5 A/div).

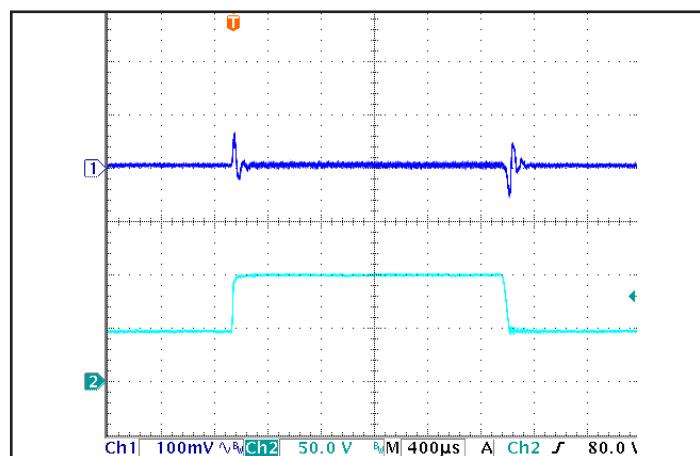


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu F$  electrolytic output capacitance. Ch 1: Vout (100 mV/div), Ch 2: Vin (50 V/div).



## Technical Specification

**Input: 34-75 V**

**Output: 5.0 V**

**Current: 10 A**

**Part No.: IQ48050SMx10**

### IQ48050SMx10 Electrical Characteristics (5.0 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			2.4	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		50	60	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.05		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		40		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 4
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	4.950	5.000	5.050	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-75		75	mV	
Total Output Voltage Range	4.875		5.125	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		20	40	mV	Full load
RMS		5	10	mV	Full load
Operating Output Current Range	0		10	A	Subject to thermal derating
Output DC Current Limit Inception	10.5	12.0	13.5	A	
Back-Drive Current Limit while Enabled		2.4		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			5,000	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		275		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		100		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; see Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	5.7	6.0	6.8	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		86		%	See Figure 1 for efficiency curve
50 % Load		86		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Safety certification requires the use of a fuse rated at or below this value.

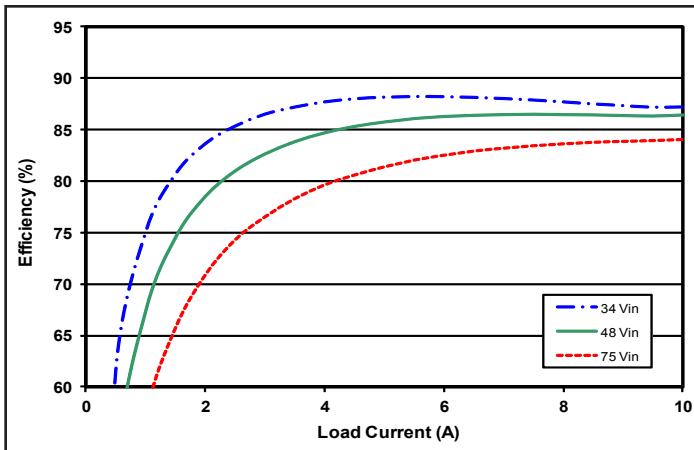


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

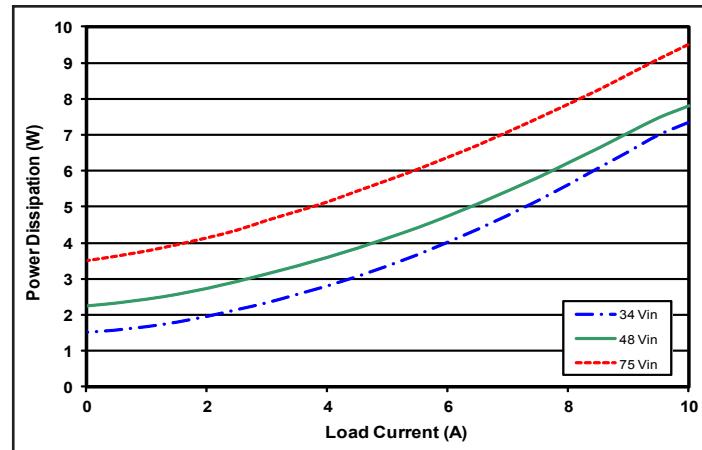


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

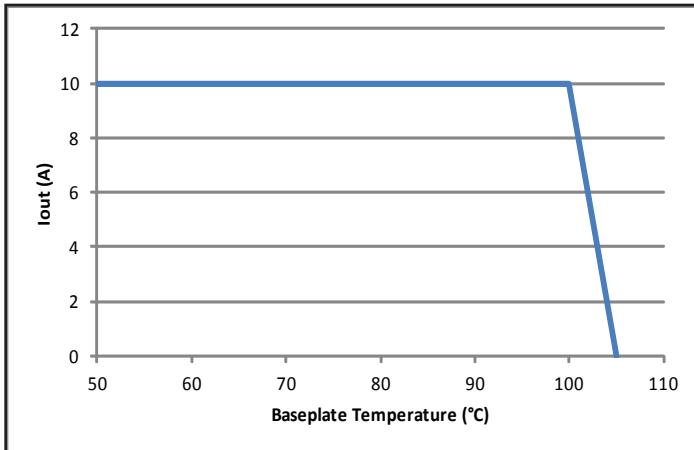


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

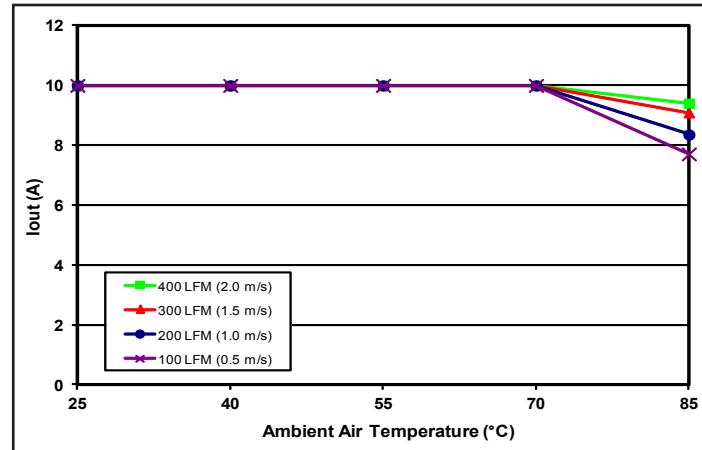


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

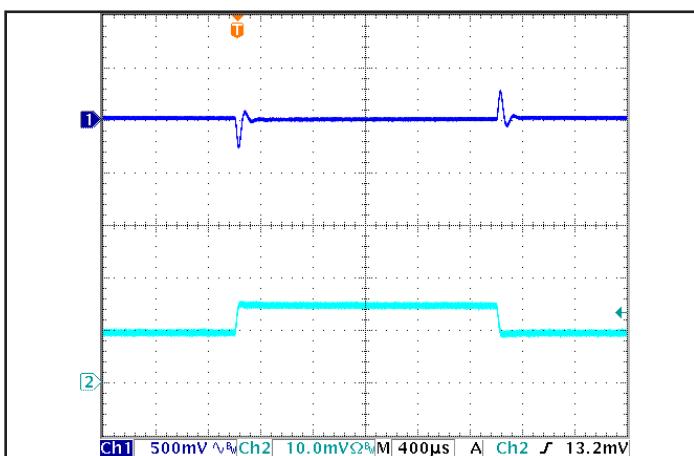


Figure 5: Output voltage response to step-change in load current (50 % -75 % -50 % of  $I_{out}(max)$ ;  $dI/dt = 0.1 A/\mu s$ ). Load cap: 100  $\mu F$  electrolytic capacitor. Ch 1:  $V_{out}$  (100 mV/div), Ch 2:  $I_{out}$  (5 A/div)

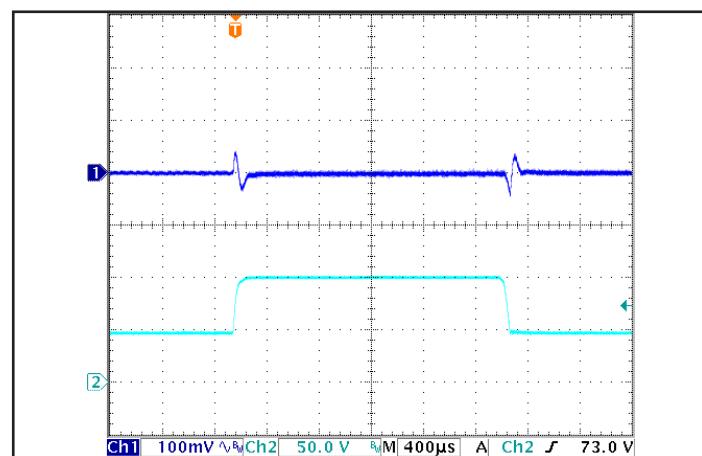


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu F$ , electrolytic output capacitance. Ch 1:  $V_{out}$  (100 mV/div), Ch 2:  $V_{in}$  (50 V/div).



## Technical Specification

**Input: 34-75 V**

**Output: 7.0 V**

**Current: 7.0 A**

**Part No.: IQ48070SMx07**

### IQ48070SMx07 Electrical Characteristics (7.0 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			2.2	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		50	60	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.09		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		30		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 4
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	6.930	7.000	7.070	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-105		105	mV	
Total Output Voltage Range	6.825		7.175	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		25	50	mV	Full load
RMS		5	10	mV	Full load
Operating Output Current Range	0		7	A	Subject to thermal derating
Output DC Current Limit Inception	7.7	8.3	8.8	A	
Back-Drive Current Limit while Enabled		1.8		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			4,000	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		300		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		150		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; see Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	8.0	8.5	9.5	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		88		%	See Figure 1 for efficiency curve
50 % Load		86		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Safety certification requires the use of a fuse rated at or below this value.

**Input: 34-75 V**

**Output: 7.0 V**

**Current: 7.0 A**

**Part No.: IQ48070SMx07**

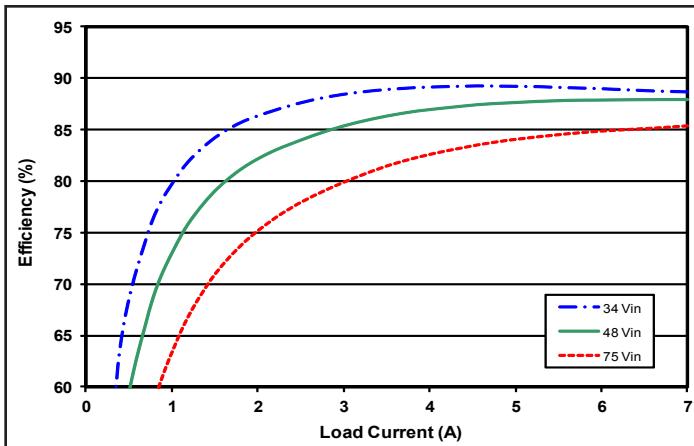


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

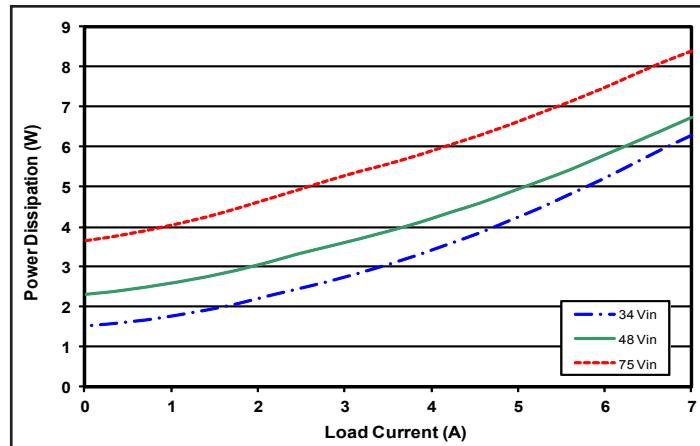


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

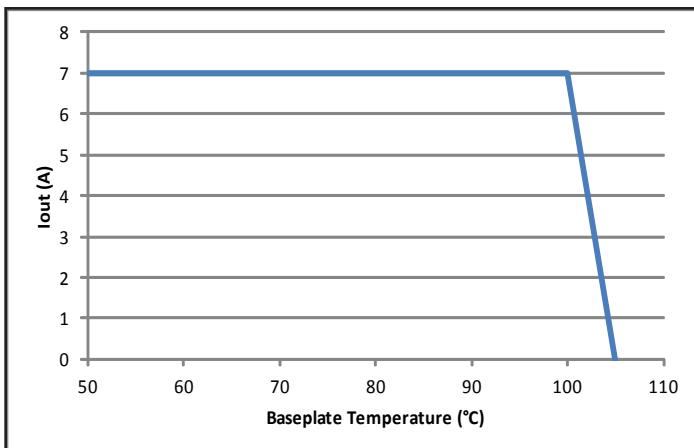


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

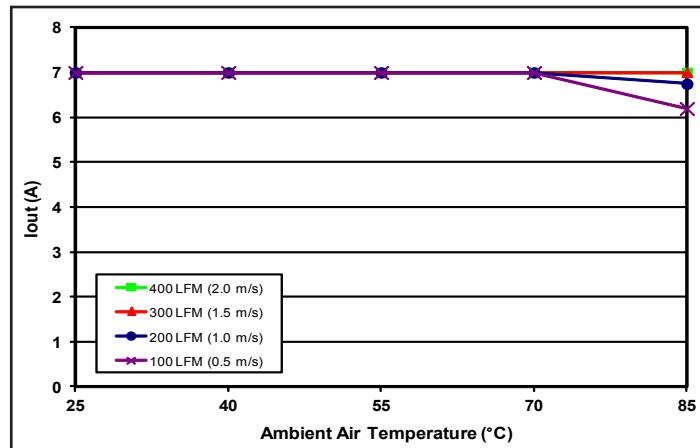


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

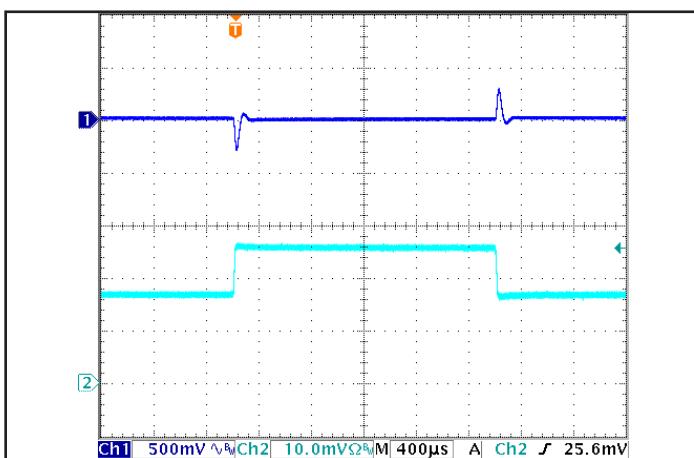


Figure 5: Output voltage response to step-change in load current (50% - 75% - 50% of Iout(max);  $dI/dt = 0.1 \text{ A}/\mu\text{s}$ ). Load cap: 100  $\mu\text{F}$  electrolytic capacitor. Ch 1: Vout (500 mV/div), Ch 2: Iout (2 A/div)

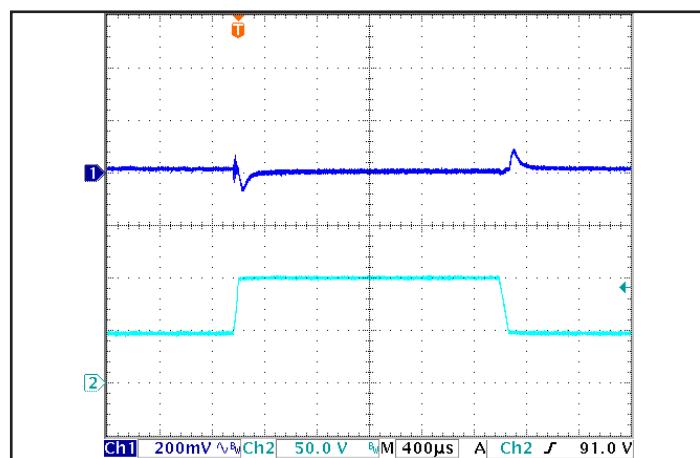


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu\text{F}$  electrolytic output capacitance. Ch 1: Vout (200 mV/div), Ch 2: Vin (50 V/div)



## Technical Specification

**Input: 34-75 V**

**Output: 12 V**

**Current: 4.0 A**

**Part No.: IQ48120SMx04**

### IQ48120SMx04 Electrical Characteristics (12.0 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			2.3	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		60	80	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.09		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		45		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 4
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	11.88	12.00	12.12	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-180		180	mV	
Total Output Voltage Range	11.70		12.30	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		50	100	mV	Full load
RMS		10	20	mV	Full load
Operating Output Current Range	0		4	A	Subject to thermal derating
Output DC Current Limit Inception	4.4	4.9	5.2	A	
Back-Drive Current Limit while Enabled		2.5		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			3,000	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		200		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		150		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; see Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	14.3	15.0	16.2	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		87		%	See Figure 1 for efficiency curve
50 % Load		85		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Safety certification requires the use of a fuse rated at or below this value.

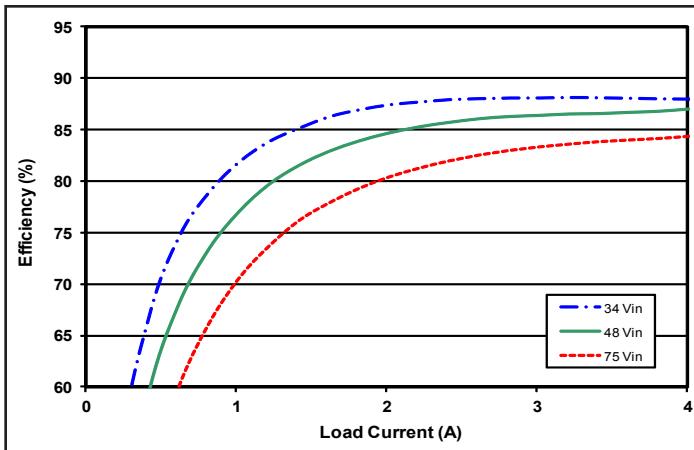


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

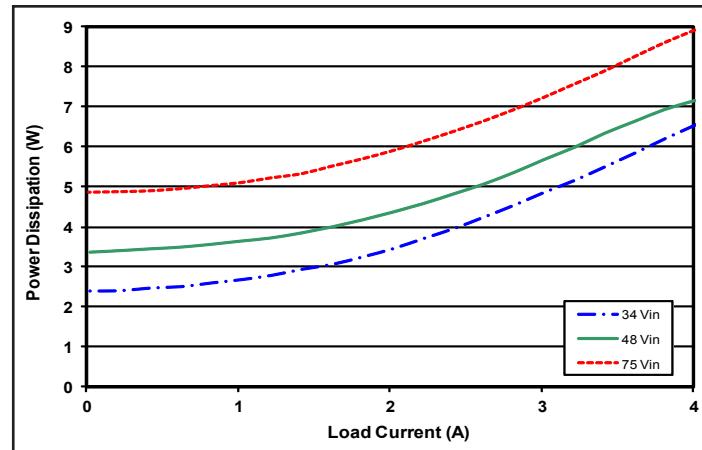


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

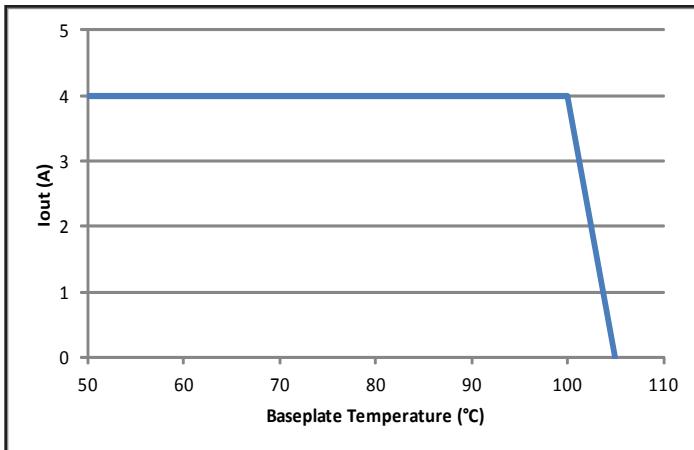


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

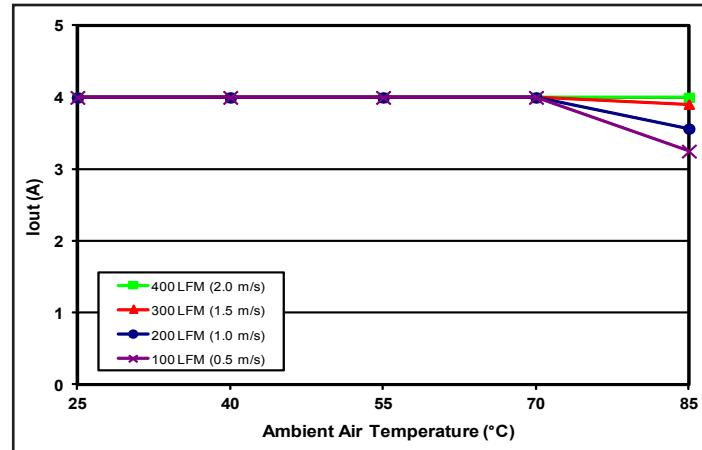


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

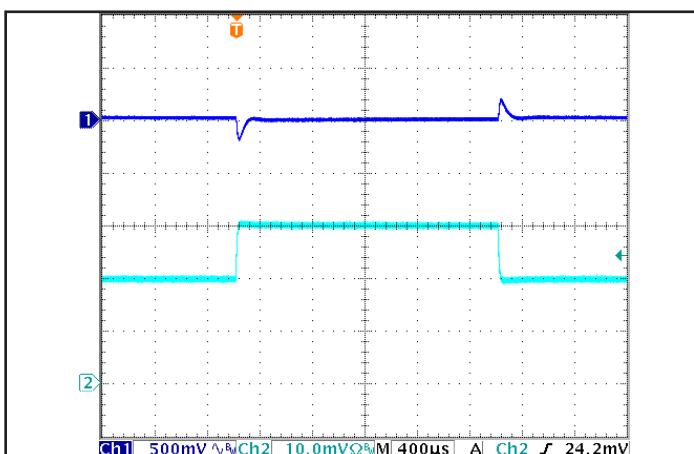


Figure 5: Output voltage response to step-change in load current (50% -75% -50% of Iout(max);  $dI/dt = 0.1 \text{ A}/\mu\text{s}$ ). Load cap: 100  $\mu\text{F}$  electrolytic capacitor. Ch 1: Vout (500 mV/div), Ch 2: Iout (1 A/div).

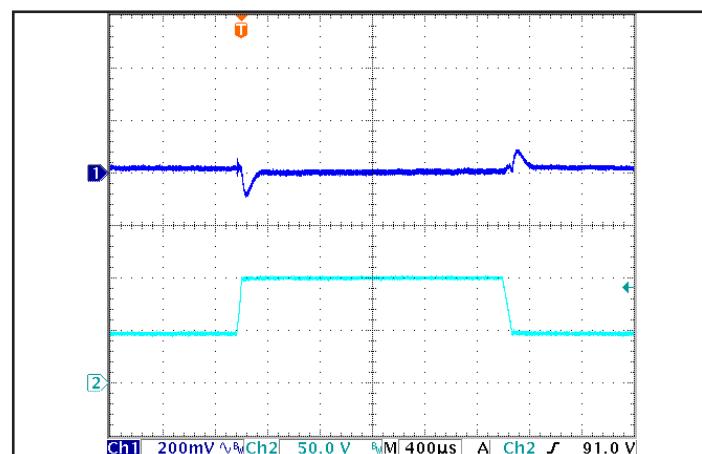


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu\text{F}$  electrolytic output capacitance. Ch 1: Vout (200 mV/div), Ch 2: Vin (50 V/div).



## Technical Specification

**Input: 34-75 V**

**Output: 15 V**

**Current: 3.0 A**

**Part No.: IQ48150SMx03**

### IQ48150SMx03 Electrical Characteristics (15.0 Vout)

Ta = 25 °C, airflow rate = 300 LFM, Vin = 48 Vdc unless otherwise noted; full operating temperature range is -40 °C to +100 °C baseplate temperature with appropriate power derating. Specifications subject to change without notice.

Parameter	Min.	Typ.	Max.	Units	Notes & Conditions
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current			2.2	A	Vin min; trim up; in current limit
No-Load Input Current (enabled)		75	90	mA	
Disabled Input Current		10	14	mA	
Response to Input Transient		0.09		V	1000 V/ms; see Figure 6
Input Terminal Ripple Current		40		mA	RMS
Recommended Input Fuse			20	A	Fast acting fuse recommended; see Note 4
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point	14.85	15.00	15.15	V	
Output Voltage Regulation					
Over Line		±0.1	±0.3	%	
Over Load		±0.1	±0.3	%	
Over Temperature	-225		225	mV	
Total Output Voltage Range	14.62		15.38	V	Over sample, line, load, temperature & life
Output Voltage Ripple and Noise					20 MHz bandwidth; see Note 1
Peak-to-Peak		60	120	mV	Full load
RMS		12	35	mV	Full load
Operating Output Current Range	0		3	A	Subject to thermal derating
Output DC Current Limit Inception	3.3	3.5	4.2	A	
Back-Drive Current Limit while Enabled		3		A	Negative current drawn into output pins
Back-Drive Current Limit while Disabled		2		mA	Negative current drawn into output pins
Maximum Output Capacitance			1,200	µF	Vout nominal at full load (resistive load); See Note 2
Output Voltage during Load Current Transient					
Step Change in Output Current (0.1 A/µs)		150		mV	50 % to 75 % to 50 % Iout max; see Figure 5
Settling Time		100		µs	To within 1 % Vout nom; see Figure 5
Output Voltage Trim Range	-10		10	%	Across Pins 8 & 4; Common Figures 3-5; see Note 3
Output Voltage Remote Sense Range			10	%	Across Pins 8 & 4
Output Over-Voltage Protection	18.0	18.5	20.0	V	Over full temp range
<b>EFFICIENCY</b>					
100 % Load		88		%	See Figure 1 for efficiency curve
50 % Load		85		%	See Figure 1 for efficiency curve

Note 1: Output is terminated with 1 µF ceramic and 22 µF low-ESR tantalum capacitors. For applications requiring reduced output voltage ripple and noise, consult SynQor applications support (e-mail: support@synqor.com)

Note 2: Recommended minimum output capacitance is 100 µF

Note 3: Trim-up range is limited below 10 % at low line and full load, consult SynQor applications support for more detail (e-mail: support@synqor.com)

Note 4: Safety certification requires the use of a fuse rated at or below this value.

**Input: 34-75 V**

**Output: 15 V**

**Current: 3.0 A**

**Part No.: IQ48150SMx03**

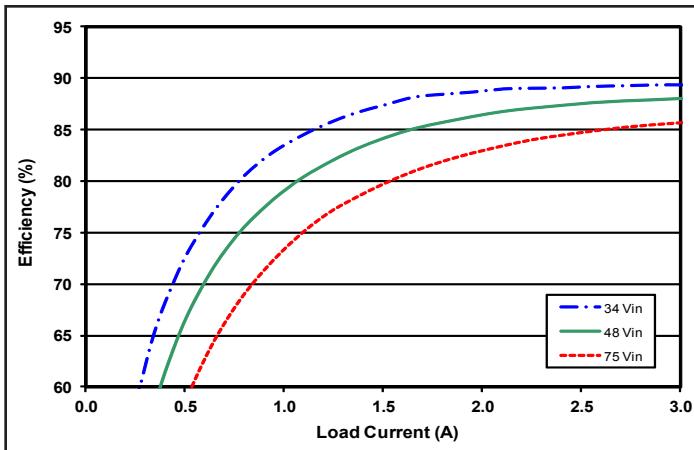


Figure 1: Efficiency at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

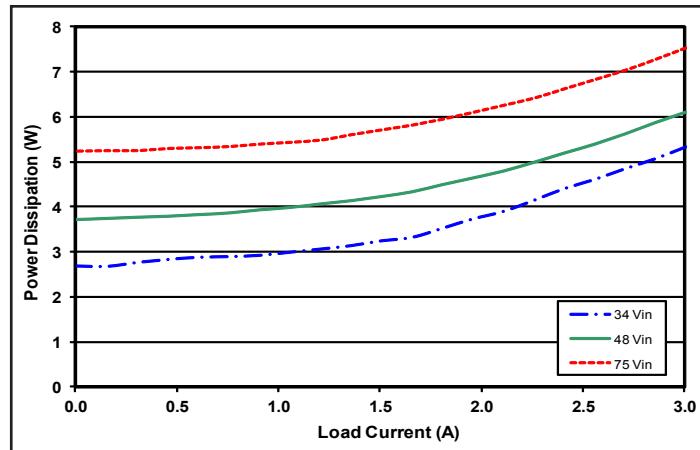


Figure 2: Power dissipation at nominal output voltage vs. load current for minimum, nominal, and maximum input voltage at 25 °C.

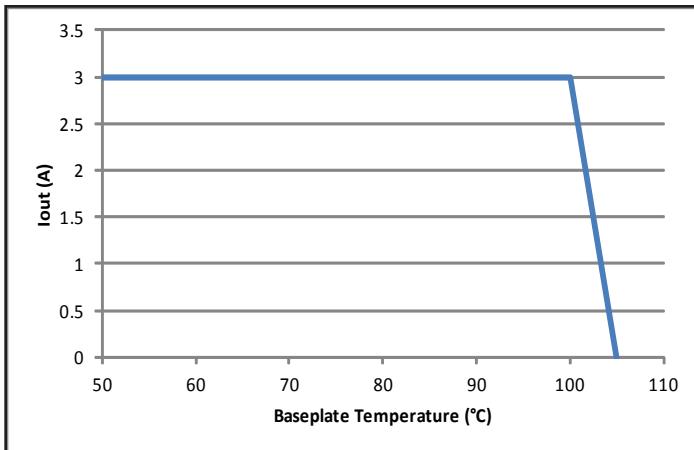


Figure 3: Maximum load current vs. baseplate temperature when conductively cooled. Note: The system design must provide a suitable thermal path that maintains the baseplate temperature below 100 °C.

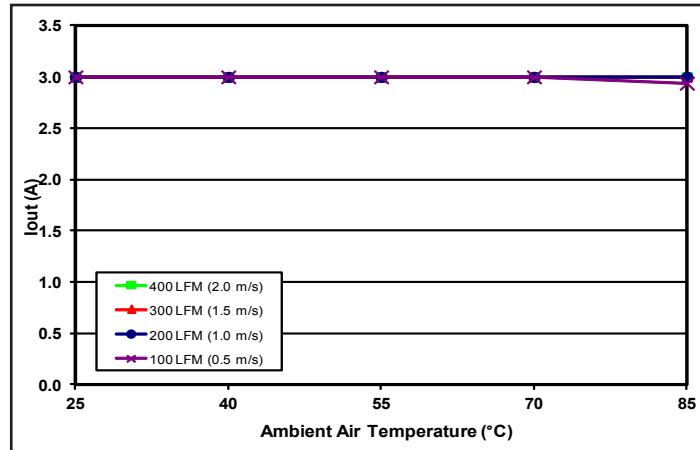


Figure 4: Encased converter (with 1/4" heatsink) max. output power derating vs. ambient air temperature for airflow rates of 100 LFM through 400 LFM. Air flows across the converter from input to output (nominal input voltage).

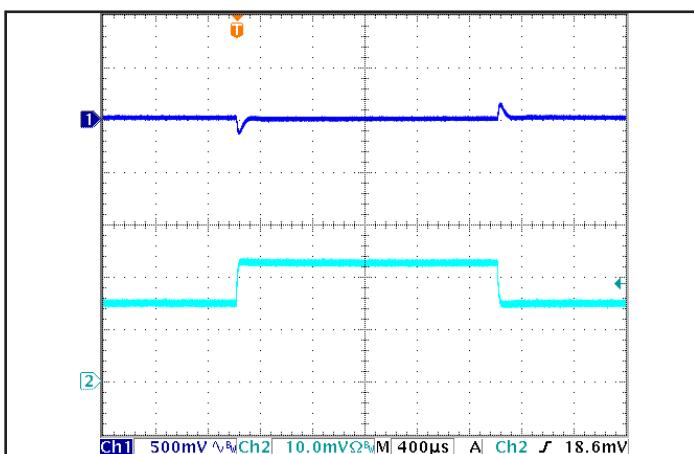


Figure 5: Output voltage response to step-change in load current (50 % -75 % -50 % of  $I_{out}(max)$ ;  $dI/dt = 0.1 A/\mu s$ ). Load cap: 100  $\mu F$  electrolytic capacitor. Ch 1:  $V_{out}$  (500 mV/div), Ch 2:  $I_{out}$  (1 A/div)

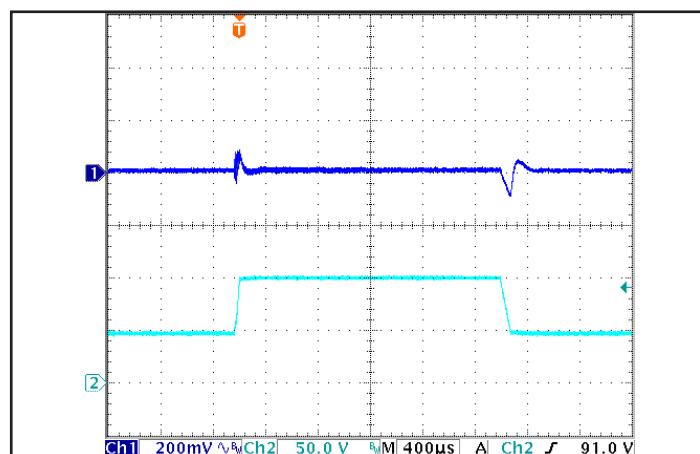


Figure 6: Output voltage response to step-change in input voltage (1000 V/ms). Load cap: 100  $\mu F$  electrolytic output capacitance. Ch 1:  $V_{out}$  (200 mV/div), Ch 2:  $V_{in}$  (50 V/div).


### BASIC OPERATION AND FEATURES

This converter series uses a two-stage power conversion topology. The first stage is a buck-converter that keeps the output voltage constant over variations in line, load, and temperature. The second stage uses a transformer to provide the functions of input/output isolation and voltage step-up or step-down to achieve the output voltage required.

Both the first stage and the second stage switch at a fixed frequency for predictable EMI performance. Rectification of the transformer's output is accomplished with synchronous rectifiers. These devices, which are MOSFETs with a very low on-state resistance, dissipate far less energy than Schottky diodes. This is the primary reason that the converter has such high efficiency.

These converters are offered totally encased to withstand harsh environments and thermally demanding applications. Dissipation throughout the converter is so low that it does not require a heatsink for operation in many applications; however, adding a heatsink provides improved thermal derating performance in demanding applications.

This series of converters use the industry standard footprint and pin-out configuration.

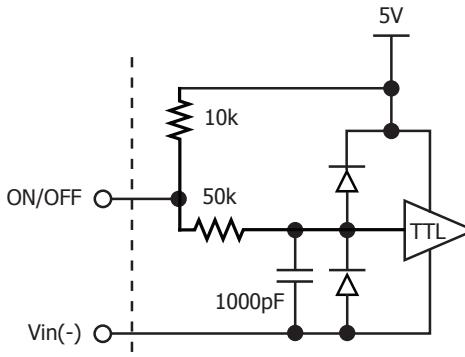

**Figure B:** Internal ON/OFF pin circuitry

**REMOTE SENSE(±) (Pins 7 and 5):** The SENSE(±) inputs correct for voltage drops along the conductors that connect the converter's output pins to the load.


Pin 7 should be connected to Vout(+) and Pin 5 should be connected to Vout(-) at the point on the load where regulation is desired. A remote connection at the load can adjust for a voltage drop only as large as that specified in this datasheet, that is

$$[V_{out}(+) - V_{out}(-)] - [V_{sense}(+) - V_{sense}(-)] \leq \\ \text{Sense Range \%} \times V_{out}$$

$$\text{Sense Range \%} = \text{Trim-up Range \%} (\text{usually } 10\%)$$

Pins 7 and 5 must be connected for proper regulation of the output voltage. If these connections are not made, the converter will deliver an output voltage that is slightly higher than its specified value.

**Note:** the output over-voltage protection circuit senses the voltage across the output (pins 8 and 4) to determine when it should trigger, not the voltage across the converter's sense leads (pins 7 and 5). Therefore, the resistive drop on the board should be small enough so that output OVP does not trigger, even during load transients.

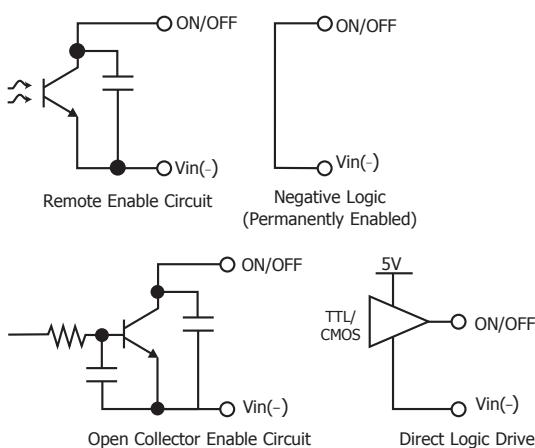

**Figure A:** Various circuits for driving the ON/OFF pin.

**OUTPUT VOLTAGE TRIM (Pin 6):** The TRIM input permits the user to adjust the output voltage across the sense leads up or down according to the trim range specifications.

To decrease the output voltage, the user should connect a resistor between Pin 6 and Pin 5 (SENSE(-) input). For a desired decrease of the nominal output voltage, the value of the resistor should be

$$R_{trim-down} = \left( \frac{511}{\Delta\%} \right) - 10.22 \text{ [k}\Omega\text{]}$$

where

$$\Delta\% = \left| \frac{V_{nominal} - V_{desired}}{V_{nominal}} \right| \times 100[\%]$$

To increase the output voltage, the user should connect a resistor between Pin 6 and Pin 7 (SENSE(+) input). For a desired increase of the nominal output voltage, the value of the resistor should be

$$R_{trim-up} = \left( \frac{5.11V_{OUT} \times (100 + \Delta\%)}{1.225\Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ [k}\Omega\text{]}$$

where  $V_{out}$  = Nominal Output Voltage

Trim graphs show the relationship between the trim resistor value  $R_{trim-up}$  and  $R_{trim-down}$ , showing the total range the output voltage can be trimmed up or down.

**Note:** the TRIM feature does not affect the voltage at which the output over-voltage protection circuit is triggered. Trimming the output voltage too high may cause the over-voltage protection circuit to engage, particularly during transients.

It is not necessary for the user to add capacitance at the Trim pin. The node is internally bypassed to eliminate noise.

\* For 1.2Vout unit replace 1.225 with 0.6 (see Trim Up Graph Common Figure 3).

**Total DC Variation of VOUT:** For the converter to meet its full specifications, the maximum variation of the dc value of  $V_{OUT}$ , due to both trimming and remote load voltage drops, should not be greater than that specified for the output voltage trim range.

## PROTECTION FEATURES

**Input Under-Voltage Lockout:** The converter is designed to turn off when the input voltage is too low, helping avoid an input system instability problem, described in more detail in the application note titled "Input System Instability" on our website. The lockout circuitry is a comparator with dc hysteresis. When the input voltage is rising, it must exceed the typical Turn-On Voltage Threshold value (listed on the specifications page) before the converter will turn on. Once the converter is on, the input voltage must fall below the typical Turn-Off Voltage Threshold value before the converter will turn off.

**Output Current Limit:** The maximum current limit remains constant as the output voltage drops. However, once the output voltage drops below the specified Output DC Current-Limit Shutdown Voltage, the converter turns off.

The converter then enters a "hiccup mode" where it repeatedly turns on and off at a 5 Hz (nominal) frequency with a 5 % duty cycle until the overload is removed. This prevents excessive heating of the converter or the system board.

**Output Over-Voltage Limit:** If the voltage across the output pins exceeds the Output Over-Voltage Protection threshold, the converter will immediately stop switching. This prevents damage to the load circuit due to 1) excessive series resistance in output current path from converter output pins to sense point, 2) a release of a overload condition, or 3) a release of a current limit condition. Load capacitance determines exactly how high the output voltage will rise in response to these conditions. After 200 ms the converter will automatically restart.

**Over-Temperature Shutdown:** A temperature sensor on the internal converter PCB senses the average temperature of the module. The thermal shutdown circuit is designed to turn the converter off when the temperature at the sensed location reaches the Over-Temperature Shutdown value. It will allow the converter to turn on again when the temperature of the sensed location falls by the amount of the Over-Temperature Shutdown Restart Hysteresis value.

### APPLICATION CONSIDERATIONS

**Input System Instability:** This condition can occur because any dc-dc converter appears incrementally as a negative resistance load. A detailed application note titled "Input System Instability" is available on the SynQor website which provides an understanding of why this instability arises, and shows the preferred solution for correcting it. The Electrical Characteristics Table indicates a "Recommended External Input Capacitance". The value needed for that capacitance and ESR can vary based on application parameters. Input stability can be evaluated using our "Stability Calculator" tool in the Technical Support section of our website [www.synqor.com](http://www.synqor.com).

**Application Circuits:** Figure C provides a typical circuit diagram which details the input filtering and voltage trimming.

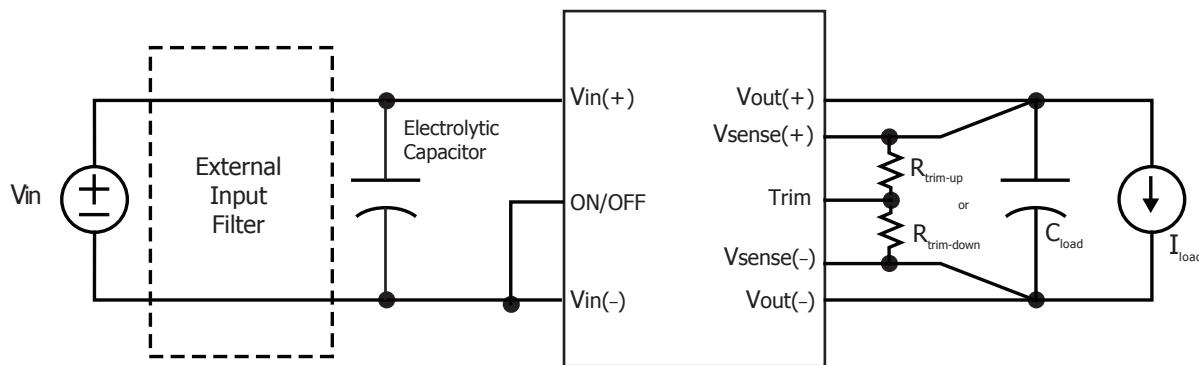


Figure C: Typical application circuit (negative logic unit, permanently enabled).

**Input Filtering and External Capacitance:** Figure D provides a diagram showing the internal input filter components. This filter dramatically reduces input terminal ripple current, which otherwise could exceed the rating of an external electrolytic input capacitor. The recommended external input capacitance is specified in the

Input Characteristics section on the Electrical Characteristics page. The input capacitance need not exactly match the specified value. More detailed information is available in the application note titled "EMI Characteristics" on the SynQor website.

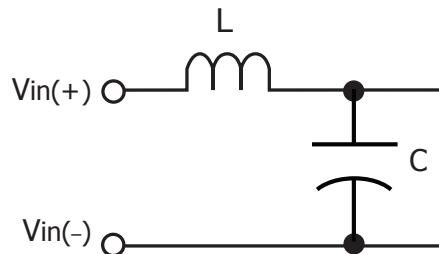


Figure D: Internal Input Filter Diagram (component values listed on the input characteristics page).

**Startup Inhibit Period:** The Startup Inhibit Period ensures that the converter will remain off for approximately 200 ms when it is shut down for any reason. When an output short is present, this generates a 5 Hz "hiccup mode," which prevents the converter from overheating. In all, there are seven ways that the converter can be shut down, initiating a Startup Inhibit Period:

- Input Under-Voltage Lockout
- Input Over-Voltage Shutdown
- Output Over-Voltage Protection
- Over Temperature Shutdown
- Current Limit (when V<sub>out</sub> is below shutdown voltage)
- Short Circuit Protection
- Turned off by the ON/OFF input

Figure E shows three turn-on scenarios, where a Startup Inhibit Period is initiated at t<sub>0</sub>, t<sub>1</sub>, and t<sub>2</sub>:

Before time t<sub>0</sub>, when the input voltage is below the UVL threshold, the unit is disabled by the Input Under-Voltage Lockout (UVL) feature. When the input voltage rises above the UVL threshold, the Input Under-Voltage Lockout is released, and a Startup Inhibit Period is initiated. At the end of this delay, the ON/OFF pin is evaluated, and since it is active, the unit turns on.

At time t<sub>1</sub>, the unit is disabled by the ON/OFF pin, and it cannot be enabled again until the Startup Inhibit Period has elapsed.

When the ON/OFF pin goes low after t<sub>2</sub>, and the Startup Inhibit Period has elapsed, and the output turns on within the typical Turn-On Time.

**Thermal Considerations:** The maximum operating baseplate temperature, T<sub>B</sub>, is 100 °C. As long as the user's thermal system keeps T<sub>B</sub> ≤ 100 °C, the converter can deliver its full rated power.

A power derating curve can be calculated for any heatsink that is attached to the baseplate of the converter. It is only necessary to determine the thermal resistance, R<sub>THBA</sub>, of the chosen heatsink between the baseplate and the ambient air for a given airflow rate. This information is available from the heatsink vendor. The following formula can then be used to determine the maximum power the converter can dissipate for a given thermal condition if its baseplate is to be no higher than 100 °C.

$$P_{\text{diss}}^{\max} = \frac{100 \text{ } ^\circ\text{C} - T_A}{R_{\text{THBA}}}$$

This value of power dissipation can then be used in conjunction with the data shown in Figure 2 to determine the maximum load current (and power) that the converter can deliver in the given thermal condition.

We recommend that a suitable thermal interface material such as a thermally conductive pad or grease be used to assure a good thermal interface between the base plate and the conductive cooling device.

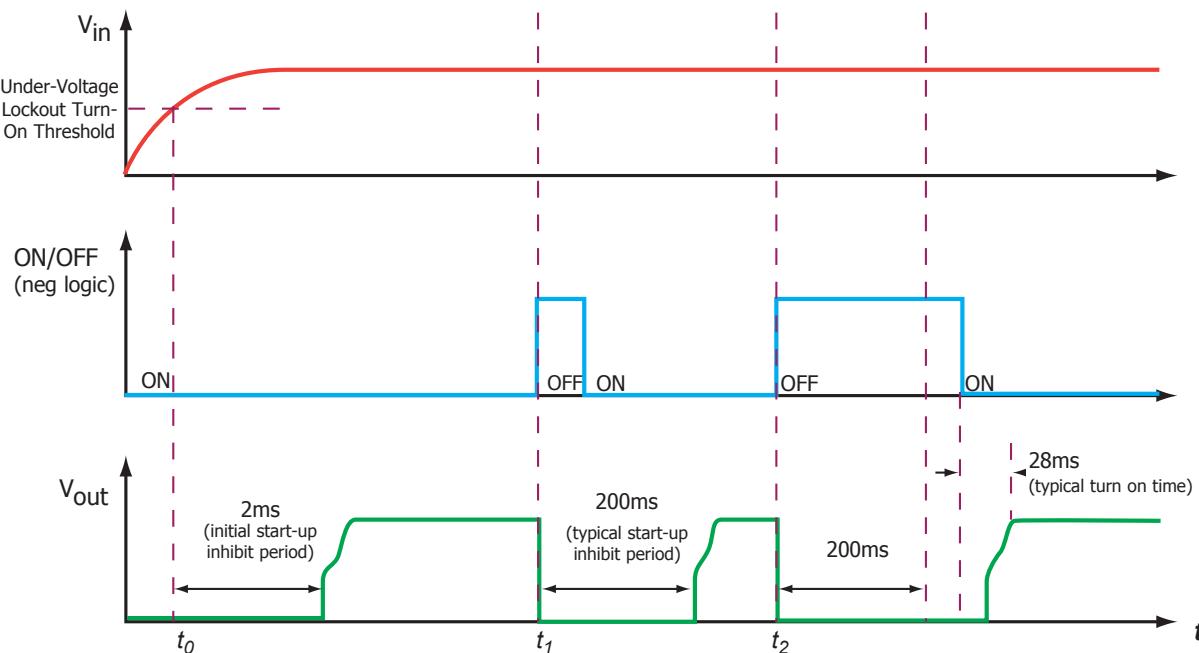


Figure E: Startup Inhibit Period (turn-on time not to scale)



Technical Specification  
**IQ48xxxSMXxxx**

## Standards & Qualification Testing

Parameter	Notes & Conditions
-----------	--------------------

### STANDARDS COMPLIANCE

UL 60950-1/R:2011-12 Basic Insulation

CAN/CSA-C22.2 No. 60950-1/A1:2011

EN 60950-1/A2:2013


Note: An external input fuse must always be used to meet these safety requirements. Contact SynQor for official safety certificates on new releases or download from the SynQor website.

Parameter	# Units	Test Conditions
-----------	---------	-----------------

### QUALIFICATION TESTING

Life Test	32	95 % rated Vin and load, units at derating point, 1000 hours
Vibration	5	10-55 Hz sweep, 0.060 " total excursion, 1 min./sweep, 120 sweeps for 3 axis
Mechanical Shock	5	100 g minimum, 2 drops in x, y, and z axis
Temperature Cycling	10	-40 °C to 100 °C, unit temp. ramp 15 °C/min., 500 cycles
Power/Thermal Cycling	5	Toperating = min to max, Vin = min to max, full load, 100 cycles
Design Marginality	5	Tmin-10 °C to Tmax+10 °C, 5 °C steps, Vin = min to max, 0-105 % load
Humidity	5	85 °C, 95 % RH, 1000 hours, continuous Vin applied except 5 min/day
Solderability	15 pins	MIL-STD-883, method 2003
Altitude	2	70,000 feet (21 km), see Note

Note: A conductive cooling design is generally needed for high altitude applications because of naturally poor convective cooling at rare atmospheres.

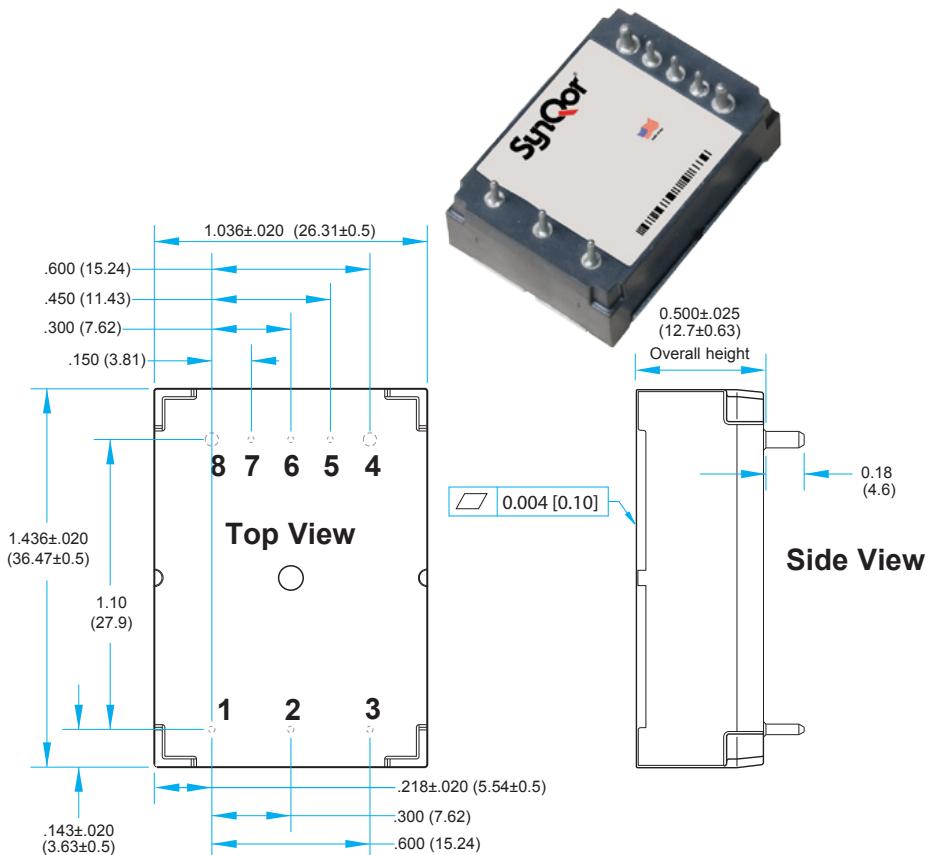

## NOTES


- 1)Baseplate flatness tolerance is 0.004" (.10mm) TIR for surface.
  - 2)Pins 1-3, 5-7 are 0.040" (1.02mm) diameter, with 0.080" (2.03mm) diameter standoff shoulders.
  - 3)Pins 4 and 8 are 0.062" (1.57 mm) diameter with 0.100" (2.54 mm) diameter standoff shoulders.
  - 4)All Pins: Material – Copper Alloy; Finish – Matte Tin over Nickel plate
  - 5)Undimensioned components are shown for visual reference only.
  - 6)Weight: 1.1oz (31g) Typical
  - 7)All dimensions in inches (mm)
    - Tolerances: x.xx +/-0.02 in. (x.x +/-0.5mm)
    - x.xxx +/-0.010 in. (x.xx +/-0.25mm)
  - 8)Workmanship: Meets or exceeds IPC-A-610 Class II
  - 9)Recommended pin length is 0.03" (0.76mm)
    - greater than the PCB thickness.

## **PTN DESIGNATIONS**

Pin	Label	Function
1	Vin(+)	Positive input voltage
2	ON/OFF	TTL input to turn converter on and off, referenced to Vin(-), with internal pull up.
3	Vin(-)	Negative input voltage
4	Vout(-)	Negative output voltage
5	SENSE(-)	Negative remote sense(see note 1)
6	TRIM	Output voltage trim (see note 2)
7	SENSE(+)	Positive remote sense (see note 3)
8	Vout(+)	Positive output voltage

## **Notes:**

- 1) SENSE(–) should be connected to Vout(–) either remotely or at the converter.
  - 2) Leave TRIM pin open for nominal output voltage.
  - 3) SENSE(+) should be connected to Vout(+) either remotely or at the converter

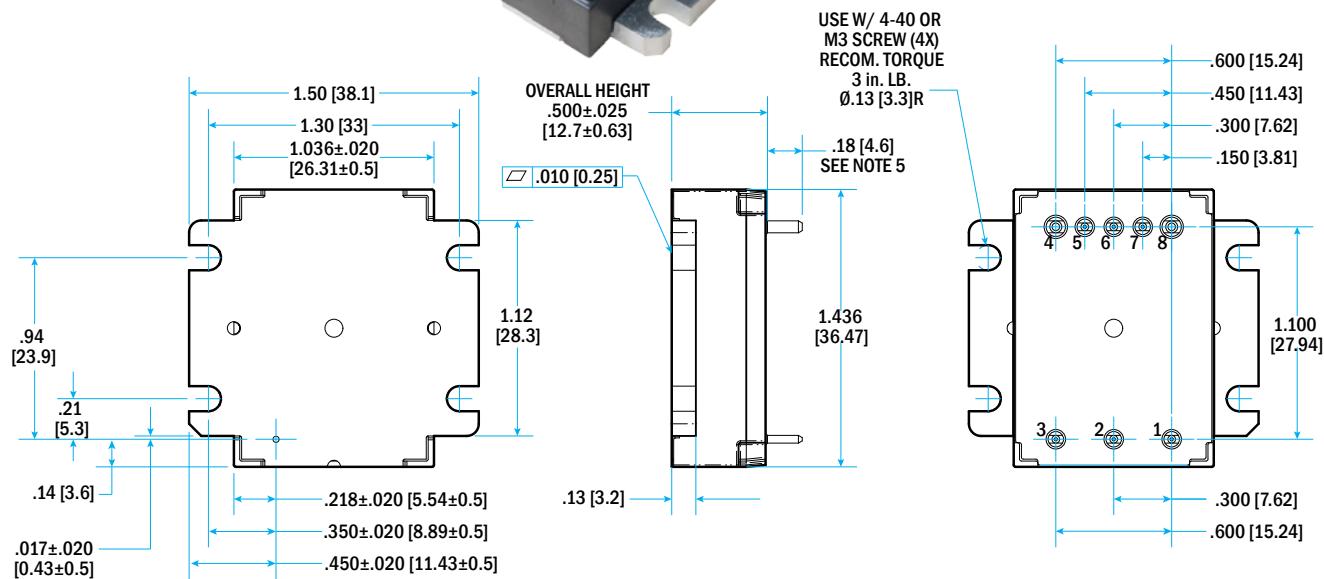

### NOTES

- 1) Applied torque per screw should not exceed 5in-lb (3in-lb recommended).
  - 2) Baseplate flatness tolerance is 0.01" (.25mm) TIR for surface.
  - 3) Pins 1-3, 5-7 are 0.040" (1.02mm) diameter, with 0.080" (2.03mm) diameter standoff shoulders.
  - 4) Pins 4 and 8 are 0.062" (1.57 mm) diameter with 0.100" (2.54 mm) diameter standoff shoulders.
  - 5) All Pins: Material – Copper Alloy  
Finish - Matte Tin over Nickel plate
  - 6) Weight: 1.22 oz (34.6g) Typical
  - 7) Undimensioned components are shown for visual reference only.
  - 8) All dimensions in inches (mm)
- Tolerances: x.xx +/-0.02 in. (x.x +/-0.5mm)  
x.xxx +/-0.010 in. (x.xx +/-0.25mm)
- 9) Workmanship: Meets or exceeds IPC-A-610 Class II

### PIN DESIGNATIONS


Pin	Label	Function
1	Vin(+)	Positive input voltage
2	ON/OFF	TTL input to turn converter on and off, referenced to Vin(-), with internal pull up.
3	Vin(-)	Negative input voltage
4	Vout(-)	Negative output voltage
5	SENSE(-)	Negative remote sense(see note 1)
6	TRIM	Output voltage trim (see note 2)
7	SENSE(+)	Positive remote sense (see note 3)
8	Vout(+)	Positive output voltage

### Notes:

- 1) SENSE(-) should be connected to Vout(-) either remotely or at the converter.
- 2) Leave TRIM pin open for nominal output voltage.
- 3) SENSE(+) should be connected to Vout(+) either remotely or at the converter.

## PART NUMBERING SYSTEM

The part numbering system for SynQor's dc-dc converters follows the format shown in the example below.

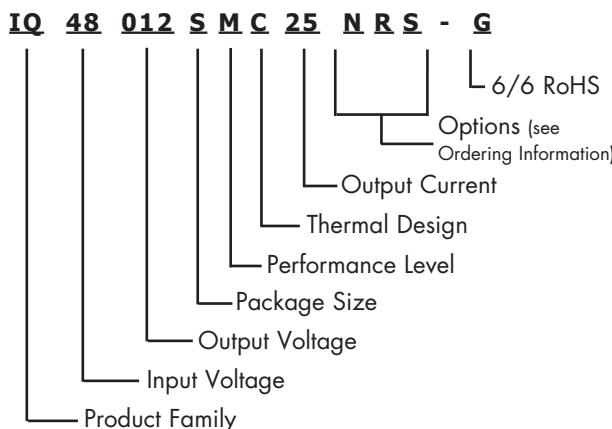

The first 12 characters comprise the base part number and the last 3 characters indicate available options. The "-G" suffix indicates 6/6 RoHS compliance.

## Application Notes

A variety of application notes and technical white papers can be downloaded in pdf format from our [website](#).

**RoHS Compliance:** The EU led RoHS (Restriction of Hazardous Substances) Directive bans the use of Lead, Cadmium, Hexavalent Chromium, Mercury, Polybrominated Biphenyls (PBB), and Polybrominated Diphenyl Ether (PBDE) in Electrical and Electronic Equipment. This SynQor product is 6/6 RoHS compliant. For more information please refer to SynQor's RoHS addendum available at our [RoHS Compliance / Lead Free Initiative web page](#) or e-mail us at [rohs@synqor.com](mailto:rohs@synqor.com).

## ORDERING INFORMATION

The tables below show the valid model numbers and ordering options for converters in this product family. When ordering SynQor converters, please ensure that you use the complete 15 character part number consisting of the 12 character base part number and the additional characters for options. InQor units are only available with 6/6 RoHS compliance indicated by "-G".

Model Number	Input Voltage	Output Voltage	Max Output Current
<b>IQ48012SMw25xyz</b>	<b>48 V</b>	<b>1.2 V</b>	<b>25 A</b>
<b>IQ48015SMw25xyz</b>	<b>48 V</b>	<b>1.5 V</b>	<b>25 A</b>
<b>IQ48018SMw25xyz</b>	<b>48 V</b>	<b>1.8 V</b>	<b>25 A</b>
<b>IQ48025SMw20xyz</b>	<b>48 V</b>	<b>2.5 V</b>	<b>20 A</b>
<b>IQ48033SMw15xyz</b>	<b>48 V</b>	<b>3.3 V</b>	<b>15 A</b>
<b>IQ48050SMw10xyz</b>	<b>48 V</b>	<b>5 V</b>	<b>10 A</b>
<b>IQ48070SMw07xyz</b>	<b>48 V</b>	<b>7 V</b>	<b>7 A</b>
<b>IQ48120SMw04xyz</b>	<b>48 V</b>	<b>12 V</b>	<b>4 A</b>
<b>IQ48150SMw03xyz</b>	<b>48 V</b>	<b>15 V</b>	<b>3 A</b>

The following options must be included in place of the **wxyz** spaces in the model numbers listed above.

Options Description			
Thermal Design <b>w</b>	Enable Logic <b>x</b>	Pin Style <b>y</b>	Feature Set <b>z</b>
C - Encased V - Encased with Flanged Baseplate	N - Negative	R - 0.180"	S - Standard

Not all combinations make valid part numbers, please contact SynQor for availability.

## Contact SynQor for further information and to order:

**Phone:** 978-849-0600  
**Toll Free:** 888-567-9596  
**Fax:** 978-849-0602  
**E-mail:** [power@synqor.com](mailto:power@synqor.com)  
**Web:** [www.synqor.com](http://www.synqor.com)  
**Address:** 155 Swanson Road  
Boxborough, MA 01719  
USA

## PATENTS

SynQor holds numerous U.S. patents, one or more of which apply to most of its power converter products. Any that apply to the product(s) listed in this document are identified by markings on the product(s) or on internal components of the product(s) in accordance with U.S. patent laws. SynQor's patents include the following:

5,999,417	6,222,742	6,545,890	6,594,159	6,731,520	6,894,468
6,896,526	6,927,987	7,050,309	7,072,190	7,085,146	7,119,524
7,269,034	7,272,021	7,272,023	7,558,083	7,564,702	7,765,687
7,787,261	8,023,290	8,149,597	8,493,751	8,644,027	9,143,042

## Warranty

SynQor offers a two (2) year limited warranty. Complete warranty information is listed on our website or is available upon request from SynQor.