


## AC Current transducer APR-B10

Split core transducer for the electronic measurement distorted AC waveforms current, with galvanic isolation between the primary (High power) and the secondary circuits (Electronic circuit). Switch selectable ranges and True RMS 0-5V and 0-10V switch selectable voltage output.



Preliminary

$I_{PN} = 10 \dots 400 \text{ A}$

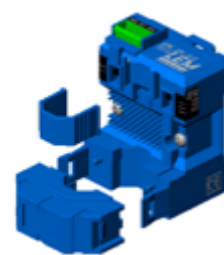

### Electrical data

Primary Nominal Current $I_{PN}$ (A.t.RMS)	Analogue Output Signal $V_{OUT}$ (V)	Type
10,25,50	0-5V or 0-10V	<b>APR 50 B10</b>
50,75,100	0-5V or 0-10V	<b>APR 100 B10</b>
100,150,200	0-5V or 0-10V	<b>APR 200 B10</b>
200,300,400	0-5V or 0-10V	<b>APR 400 B10</b>

$R_L$	Load resistance	$\geq 10$	k $\Omega$
$V_C$	Supply voltage	$+24 \pm 5\%$	V DC
$V_d$	R.m.s. voltage for AC isolation test, 50/60Hz, 1 mn	5	kV
	Limitation of voltage output	18	V

### Accuracy-Dynamic performance data

$X$	Accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$ (without offset)	$< \pm 1$	% of $I_{PN}$
$e_L$	Linearity ( $0 \dots \pm I_{PN}$ )	$< \pm 0.5$	% of $I_{PN}$
$V_{OE}$	Electrical offset voltage, $T_A = 25^\circ\text{C}$	$< \pm 0.5$	% of $I_{PN}$
$V_{OT}$	Thermal drift of $V_{OE}$	$\pm 1$	mV/K
$T_{ceG}$	Thermal drift of the gain (% of reading)	$\pm 0.1$	%/K
$t_r$	Response time @ 90% of $I_p$	$< 1000$	ms
$f$	Frequency bandwidth (-3 dB)	$10 \dots 6000$	Hz

### General data

$T_A$	Ambient operating temperature	$-20 \dots +60$	$^\circ\text{C}$
$T_S$	Ambient storage temperature	$-20 \dots +85$	$^\circ\text{C}$
$m$	Mass	90	g
	Protection type	IP20	
	Reliable isolation according to EN50178, EN61010	300	V AC
	Creepage distance	$> 5.5$	mm
	EMC in accordance with EN50082-2		
	Plastic according to UL94V0, CTI 1		

**Notes** : Installation and maintenance should be done with power supply disconnected.

### Features

- VFD and SCR waveforms current measurement
- True RMS output
- Split core type
- 5V & 10V switch selectable voltage output.
- DIN mounting & Panel mounting
- Eliminates insertion loss
- Switch selectable ranges


### Advantages

- Large aperture for cable up to  $\varnothing 18\text{mm}$
- High isolation between primary and secondary circuits
- Easy to mount

### Applications

- VFD Controlled Loads:  
VFD output indicates how the motor and attached load are operating.
- SCR Controlled Loads:  
Acurate measurement of phase angle fired or burst fired (time proportioned) SCRs. Current measurement gives faster response than temperature measurement.
- Switching Power Supplies and Electronic Ballasts:  
True RMS sensing is the most accurate way to measure power supply or ballast input power.

## Dimensions AP(R)-B10 (unit : mm, 1mm = 0.0394 inch)

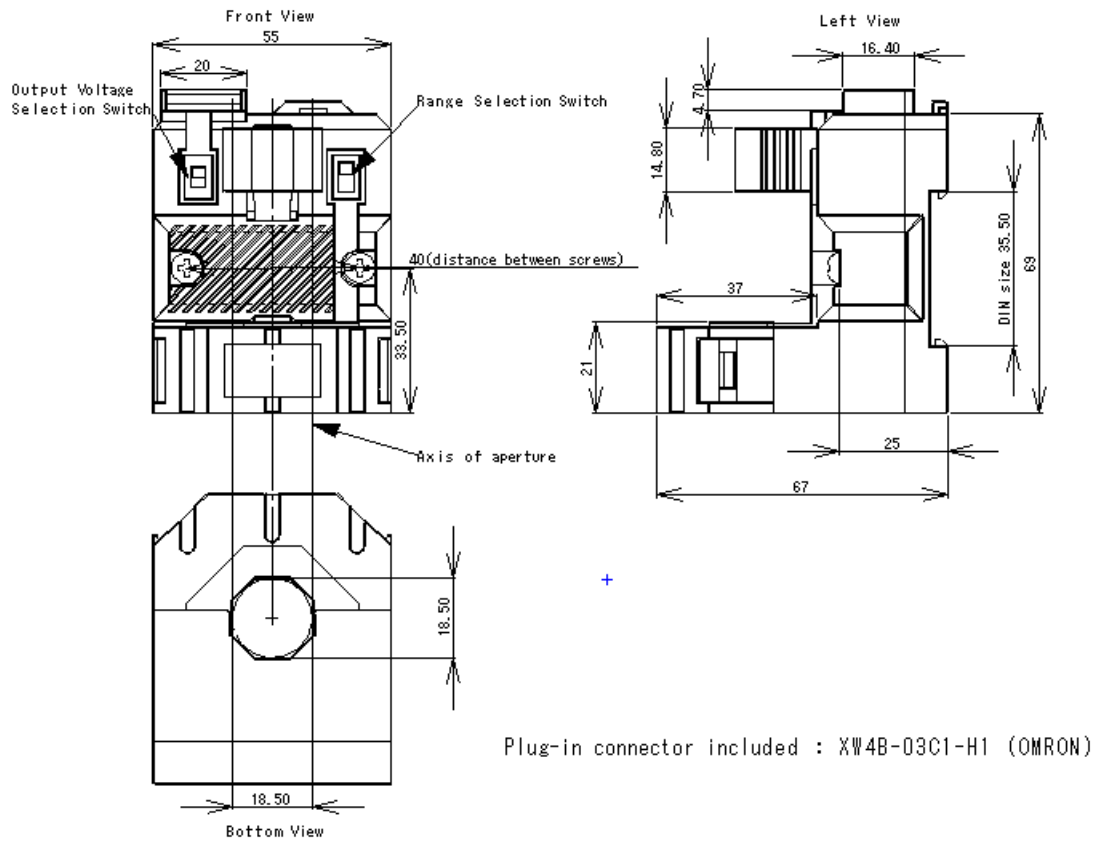

### Mechanical characteristics

- General tolerance  $\pm 1$  mm
- Primary aperture  $\varnothing 18.5$  mm
- Panel mounting 2 holes  $\varnothing 4.0$  mm
- Distance between holes 40.0 mm

For panel mounting, replace M4 screws by new one (not supplied) with appropriate length to panel's thickness.

### Connections

- Wires up to 2 mm  $\varnothing$

0-5, 10V Selectable

