2SB0710, 2SB0710A

Silicon PNP epitaxial planer type

For general amplification

Complementary to 2SD0602 and 2SD0602A

■ Features

- Large collector current I_C
- Mini type package, allowing downsizing of the equipment and automatic insertion through the tape packing and the magazine packing.

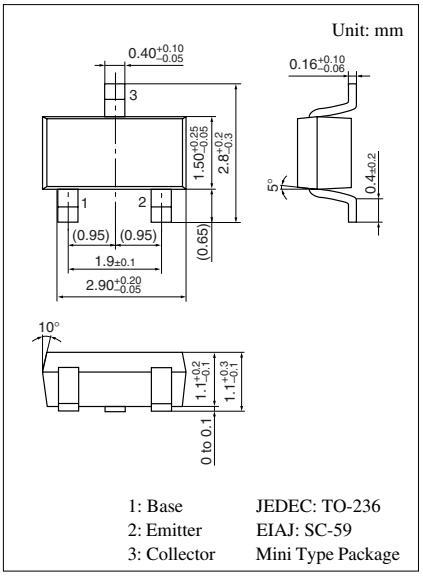

Marking Symbol

- 2SB0710 : C
- 2SB0710A : D

■ Absolute Maximum Ratings $T_a = 25°C$

Parameter		Symbol	Rating	Unit
Collector to base voltage	2SB0710	V_{CBO}	−30	V
	2SB0710A		−60	
Collector to emitter voltage	2SB0710	V_{CEO}	−25	V
	2SB0710A		−50	
Emitter to base voltage		V_{EBO}	−5	V
Peak collector current		I_{CP}	−1	A
Collector current		I_C	−500	mA
Collector power dissipation		P_C	200	mW
Junction temperature		T_j	150	°C
Storage temperature		T_{stg}	−55 to +150	°C

■ Electrical Characteristics $T_a = 25°C \pm 3°C$

Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Collector cutoff current		I_{CBO}	$V_{CB} = -20$ V, $I_E = 0$			− 0.1	μA
Collector to base voltage	2SB0710	V_{CBO}	$I_C = -10$ μA, $I_E = 0$	−30			V
	2SB0710A			−60			
Collector to emitter voltage	2SB0710	V_{CEO}	$I_C = -10$ mA, $I_B = 0$	−25			V
	2SB0710A			−50			
Emitter to base voltage		V_{EBO}	$I_E = -10$ μA, $I_C = 0$	−5			V
Forward current transfer ratio *1		h_{FE1} *2	$V_{CE} = -10$ V, $I_C = -150$ mA	85		340	
		h_{FE2}	$V_{CE} = -10$ V, $I_C = -500$ mA	40			
Collector to emitter saturation voltage *1		$V_{CE(sat)}$	$I_C = -300$ mA, $I_B = -30$ mA		− 0.35	− 0.6	V
Base to emitter saturation voltage *1		$V_{BE(sat)}$	$I_C = -300$ mA, $I_B = -30$ mA		−1.1	−1.5	V
Transition frequency		f_T	$V_{CB} = -10$ V, $I_E = 50$ mA, f = 200 MHz		200		MHz
Collector output capacitance		C_{ob}	$V_{CB} = -10$ V, $I_E = 0$, f = 1 MHz		6	15	pF

Note) *1: Pulse measurement

*2: Rank classification

Rank		Q	R	S	No-rank
h_{FE1}		85 to 170	120 to 240	170 to 340	85 to 340
Marking symbol	2SB0710	CQ	CR	CS	C
	2SB0710A	DQ	DR	DS	D

Product of no-rank is not classified and have no indication for rank.

P_C — T_a

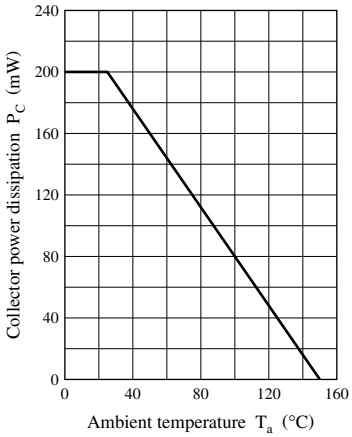

I_C — V_{CE}

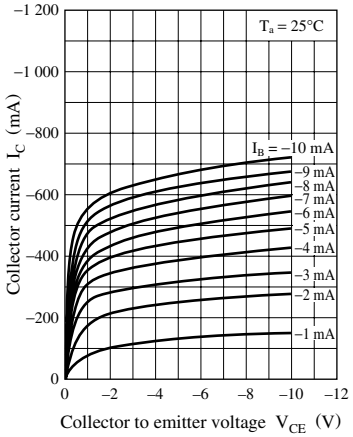

I_C — I_B

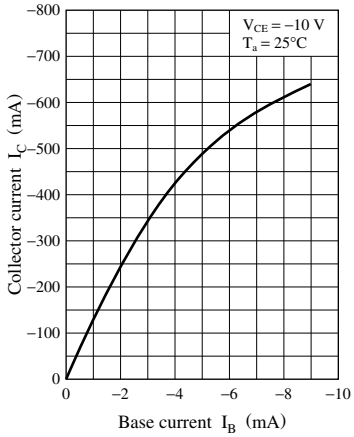

$V_{CE(sat)}$ — I_C

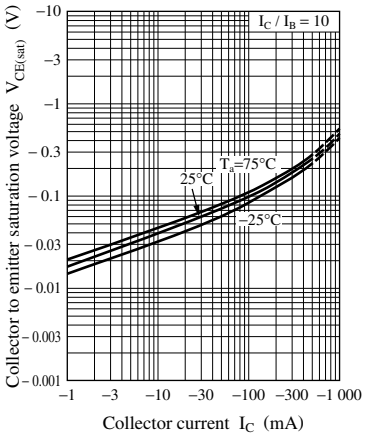

$V_{BE(sat)}$ — I_C

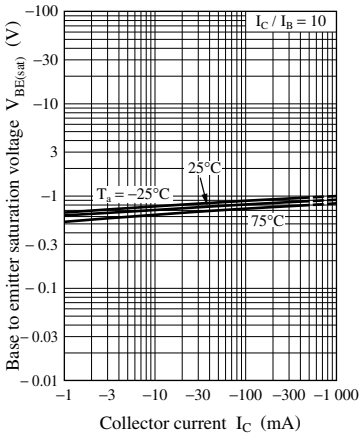

h_{FE} — I_C

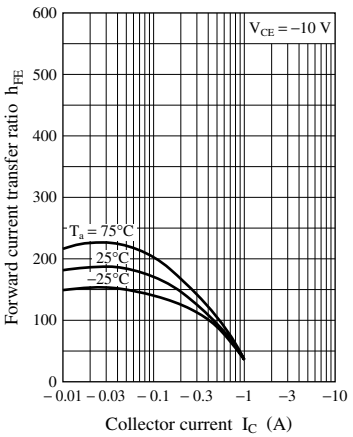

f_T — I_E

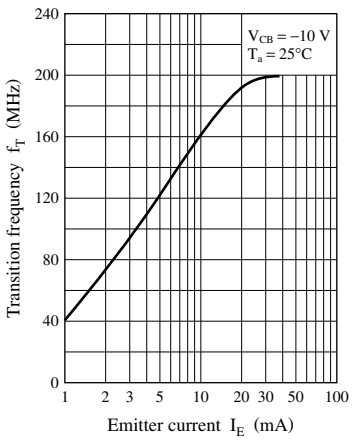

C_{ob} — V_{CB}

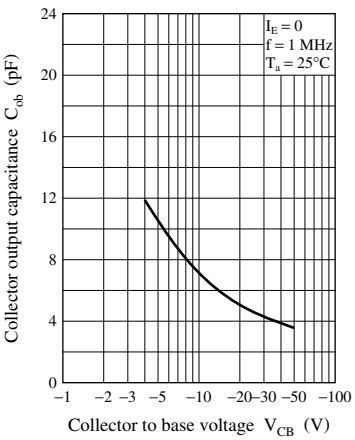

V_{CER} — R_{BE}