


**MECHANICAL DATA**

Dimensions in mm(inches)

**DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTOR**

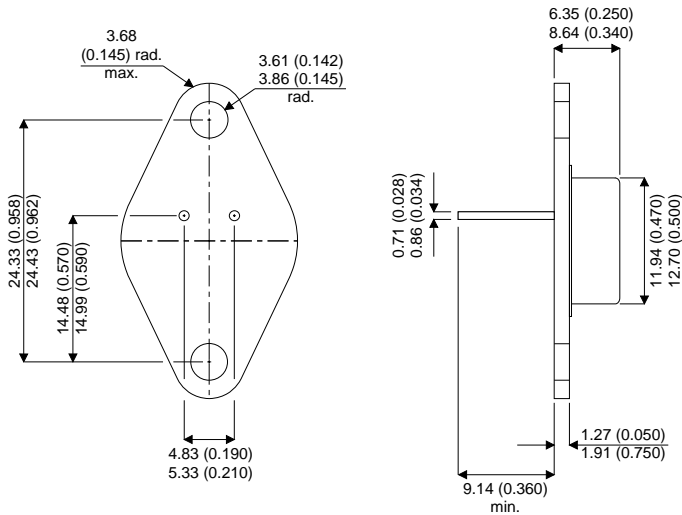

**TO-66**

PIN 1 — Base    PIN 2 — Emitter    Case is Collector.

**FEATURES**

- $LOW V_{CE(SAT)}$
- **HIGH CURRENT**

**APPLICATIONS**

- **GENERAL PURPOSE AMPLIFIER**
- **LOW FREQUENCY SWITCHING**
- **HAMMER DRIVER APPLICATIONS**

**ABSOLUTE MAXIMUM RATINGS** ( $T_{case} = 25^{\circ}C$  unless otherwise stated)

$V_{CEO}$	Collector – Emitter Voltage	80V
$V_{CB}$	Collector – Base Voltage	80V
$V_{EB}$	Emitter – Base Voltage	5V
$I_C$	Collector Current – Continuous	4A
	Peak	8A
$I_B$	Base Current	80mA
$P_D$	Total Power Dissipation at $T_{case} = 25^{\circ}C$	50W
	Derate above $25^{\circ}C$	0.286 W/ $^{\circ}C$
$T_j, T_{stg}$	Operating and Storage Junction Temperature Range	-65 to $200^{\circ}C$

**THERMAL CHARACTERISTICS**

$R_{\theta JC}$	Thermal Resistance, Junction to Case	3.5 $^{\circ}C/W$
-----------------	--------------------------------------	-------------------

**ELECTRICAL CHARACTERISTICS** ( $T_{case} = 25^{\circ}C$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
<b>OFF CHARACTERISTICS</b>					
$V_{CEO(sus)}$ Collector - Emitter Sustaining Voltage	$I_C = 50mA$ $I_B = 0$	80			V
$I_{CEO}$ Collector Cut-off Current	$I_B = 0$ $V_{CE} = 40V$	0.5			mA
$I_{CEX}$ Collector - Emitter Cut-off Current	$V_{CE} = \text{Rated } V_{CB}$ $V_{EB(off)} = 1.5V$ $T_c = 150^{\circ}C$			0.5 5.0	mA
$I_{EBO}$ Emitter Cut-off Current	$I_C = 0$ $V_{BE} = 5V$			2.0	mA
<b>ON CHARACTERISTICS</b>					
$h_{FE}$ DC Current Gain	$I_C = 2A$ $V_{CE} = 3V$	750		18000	—
	$I_C = 4A$ $V_{CE} = 3V$	100			
$V_{CE(sat)}$ Collector - Emitter Saturation Voltage	$I_C = 2A$ $I_B = 8.0mA$			2.0	V
	$I_C = 4A$ $I_B = 40mA$			3.0	
$V_{BE(sat)}$ Base - Emitter Saturation Voltage	$I_C = 4A$ $I_B = 40mA$			4.0	V
$V_{BE(on)}$ Base - Emitter On Voltage	$I_C = 2A$ $V_{CE} = 3V$			2.8	V
<b>DYNAMIC CHARACTERISTICS</b>					
$ h_{fe} $ Magnitude of Common Emitter Small Signal Short Circuit Forward current Transfer Ratio	$I_C = 1.5A$ $f = 1.0 \text{ MHz}$	$V_{CE} = 3V$	4.0		—
$C_{ob}$ Output Capacitance	$V_{CB} = 10V$ $f = 0.1 \text{ MHz}$	$I_E = 0$		120	pF
$h_{fe}$ Small Signal Current Gain	$I_C = 1.5A$ $f = 1.0 \text{ KHz}$	$V_{CE} = 3.0V$	300		—

\*Pulse test  $t_p = 300\mu s$   $\delta \leq 2\%$