# SanRex<sub>®</sub>

### Soft Recovery Diode

\* Very Fast Reverse Recovery Time
\* Soft Recovery Characteristics
\* Low Forward Voltage Drop
\* UL registered E76102

\* Welding and Plasma Cutting Machines

\* Uninterruptible Power Supplies (UPS)

\* Rectifier in Switch Mode Power Supplies (SMPS)

\* Free Wheeling Diode in converters and motor control circuits


**SanRex** Soft Recovery Diode Module **DCA100AA** series is designed for applications requiring fast switching and soft recovery wave shape to reduce or eliminate the need for

snubber components in the circuit. The modules are isolated for easy mounting with other components or a common heatsink.

## DCA100AA50/60

IF(AV)= 100A, VRRM=600V trr=220ns, Softness=0.8

solated TO-240 Package

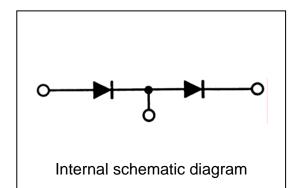

< Maximum Ratings >

**Typical Applications** 

Features

\* DC chopper

 $Tj = 25^{\circ}C$  (unless otherwise noted) per diode

Symbol	Item	Ratings		Unit	
		DCA100AA50	DCA100AA60		
V <sub>RRM</sub>	Repetitive Peak Reverse Voltage	500	600	V	
V <sub>R(DC)</sub>	Reverse D.C. Voltage	400	480	V	1


I <sub>F(AV)</sub>	Average F	orward Current	D.C., T <sub>C</sub> = 85°C	100	A
I <sub>FSM</sub>	Surge Forward Current		1/2 cycle, 60Hz, Peak value, non-repetitive	2000	A
l <sup>2</sup> t	l <sup>2</sup> t (for fusing)		Value for one cycle surge current	16700	A <sup>2</sup> s
Tj	Junction T	emperature		-40 to +150	°C
Tstg	Storage Te	emperature		-40 to +125	°C
VISO	Isolation V	oltage (R.M.S.)	A.C. 1 minute	2500	V
	Mounting	Mounting M6	Recommended 2.5-3.9	4.7	N∙m
	Torque	Terminal M5	Recommended 1.5-2.5	2.7	
	Mass		Typical Value	170	g

#### Soft Recovery Diode

5

### DCA100AA50/60

< Electric	cal Characteristics >	Tj= 25 <sup>°</sup> C (1	unless of	therwise	e noted)	per diode
Symbol	Item	Conditions		Ratings		
•			Min.	Тур.	Max.	
I <sub>RRM</sub>	Repetitive Peak Reverse Current	$V_R = V_{RRM,} T_j = 125^{\circ}C$			100	mA
$V_{FM}$	Forward Voltage Drop	I <sub>F</sub> = 100A, Inst. measurement		1.18	1.30	V
t <sub>rr</sub>	Reverse Recovery Time	I <sub>F</sub> = 100A, V <sub>R</sub> =300V, -di / dt = 100A/F s		220	300	n s
t <sub>b</sub> /t <sub>a</sub>	Softness	I <sub>F</sub> = 100A, V <sub>R</sub> =300V, -di / dt = 100A/F s	0.80			
Rth(j-c)	Thermal Resistance	Junction to case			0.5	°C/W

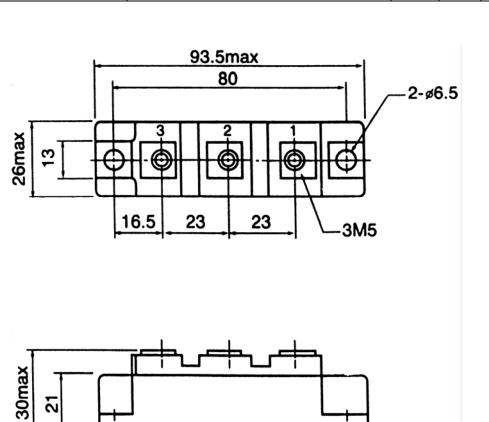

\* Dimensions in millimeters