

**GENERAL DESCRIPTION**


The B3-28 is specifically designed for VHF broadband linear power amplifier applications in the 100-200 MHz range. The device is capable of operation in Class A, AB or C amplifiers and provides the maximum power output/power gain combination.

**B3-28**  
**3 WATTS - 28 VOLTS**  
**100-200 MHz**

**VHF COMMUNICATIONS**



**ABSOLUTE MAXIMUM RATINGS**

Maximum Power Dissipation @ 25°C Case Temperature	10 W
<b>Maximum Voltage and Current</b>	
BVces Collector to Emitter Voltage	60 V
BVebo Emitter to Base Voltage	4.0 V
ic Collector Current	1.0 A
<b>Maximum Temperatures</b>	
Storage Temperature	-65 to +150°C
Operating Junction Temperature	+200°C

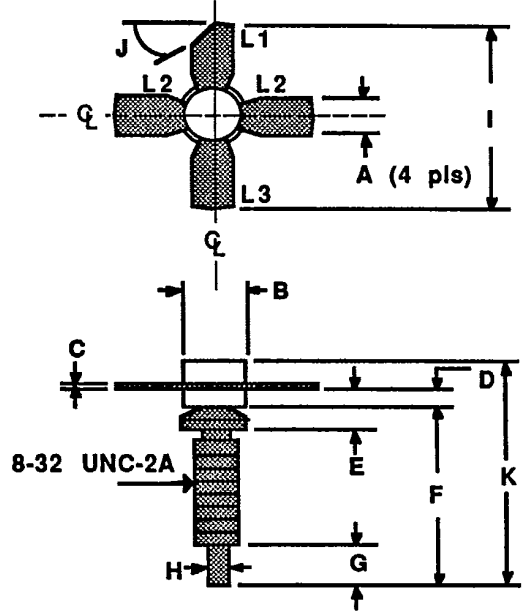

L1 : C	DIM	Millimeter	TOL	Inches	TOL
L2 : E	A	5.71	.13	.225	.005
L3 : B	B	9.52 DIA	.13	.375 DIA	.005
	C	0.13	.02	.005	.001
	D	1.78	.13	.070	.005
	E	4.06	.13	.160	.005
	F	14.59	.25	.585	.010
	G	3.30	.13	.130	.005
	H	1.52	.13	.060	.005
	I	25.40	.25	1.000	.010
	J	45°	5°	45°	5°
	K	19.00	REF	.748	REF

**POWER OUTPUT VS POWER INPUT (TYPICAL)**

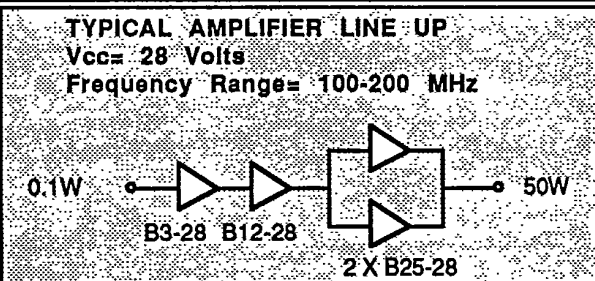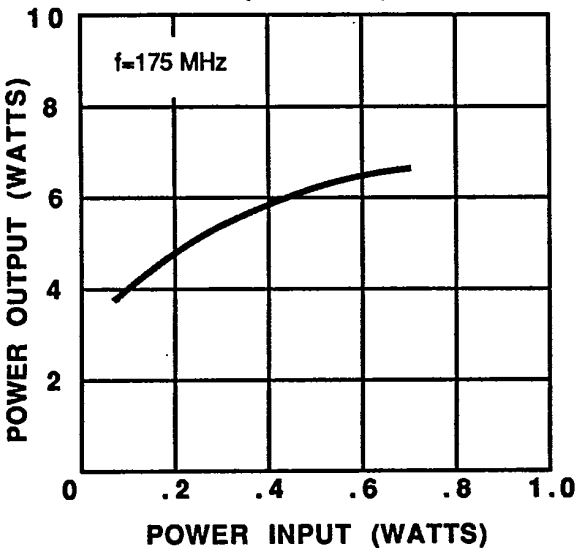


**B3-28-2**

**ELECTRICAL CHARACTERISTICS<sup>1</sup>**


SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
P <sub>out</sub>	Power Output	f = 175 MHz V <sub>cc</sub> = 28V	3.0			Watts
P <sub>in</sub>	Power Input				0.15	Watts
P <sub>g</sub>	Power Gain		13.0			dB
η <sub>c</sub>	Collector Efficiency			60		%
VSWR	Load Mismatch Tolerance				∞:1	
B <sub>Vebo</sub>	Breakdown Voltage (Emitter to Base)	I <sub>c</sub> = 0A, I <sub>e</sub> = 5mA	4.0			Volts
B <sub>Vces</sub>	Breakdown Voltage (Collector to Emitter)	V <sub>be</sub> = 0A, I <sub>c</sub> = 5mA	60			Volts
B <sub>Vceo</sub>	Breakdown Voltage (Collector to Emitter)	I <sub>b</sub> = 0A, I <sub>c</sub> = 25mA	35			Volts
C <sub>ob</sub>	Capacitance-Collector to Base	V <sub>cb</sub> = 28V, f = 1.0MHz		12		pF
h <sub>FE</sub>	DC-Current Gain	V <sub>ce</sub> = 5V, I <sub>c</sub> = 100A	10			
θ <sub>jc</sub>	Thermal Resistance				21	°C/W

Note 1: T<sub>c</sub> = +25°C unless otherwise specified

**POWER GAIN VS FREQUENCY (TYPICAL)**

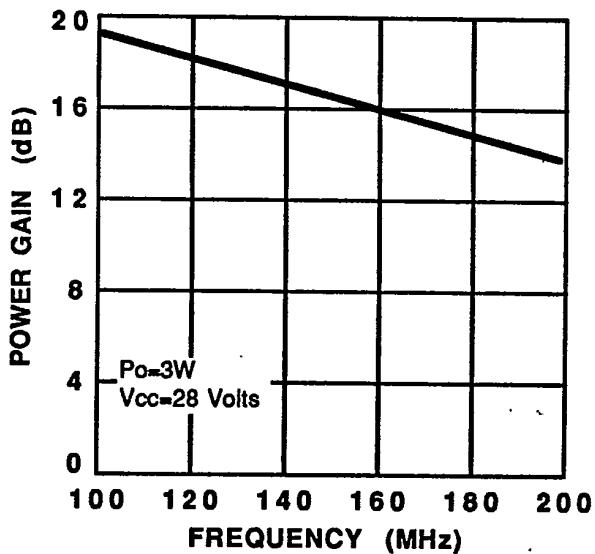

**DC SAFE OPERATING AREA (TYPICAL)**

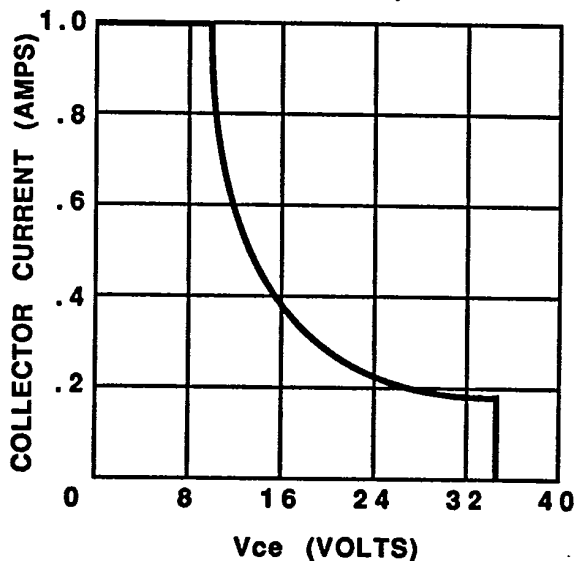

SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE

224