




R1014 SERIES HIGH VALUE INDUCTORS

- Low cost!
- Radial lead design.....

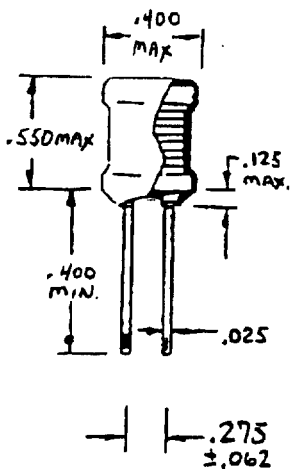

PART NO.	INDUCTANCE		Q MIN	TEST FREQ (KHZ)	SRF MIN (MHZ)	RDC MAX (OHM)	IDC MIN (mA)
	(μH)	TOL.					
R1014-101K	100	± 10%	45	796.0	3.20	0.85	343
121K	120	± 10%	45	796.0	3.00	0.95	324
151K	150	± 10%	45	796.0	2.80	1.05	309
181K	180	± 10%	45	796.0	2.50	1.15	295
221K	220	± 10%	40	796.0	2.10	1.30	275
271K	270	± 10%	40	796.0	2.00	1.50	260
331K	330	± 10%	40	796.0	1.95	1.70	240
391K	390	± 10%	40	796.0	1.85	1.85	230
471K	470	± 10%	35	796.0	1.55	2.30	210
561K	560	± 10%	35	796.0	1.30	2.55	200
681K	680	± 10%	35	796.0	1.15	2.85	190
821K	820	± 10%	35	796.0	1.00	3.10	180
102K	1000	± 10%	50	252.0	0.90	4.10	160
122K	1200	± 10%	50	252.0	0.80	4.70	150
152K	1500	± 10%	50	252.0	0.70	5.80	130
182K	1800	± 10%	50	252.0	0.60	7.40	115
222K	2200	± 10%	50	252.0	0.55	8.40	110
272K	2700	± 10%	50	252.0	0.50	9.60	95
332K	3300	± 10%	50	252.0	0.45	10.50	80
392K	3900	± 10%	50	252.0	0.40	12.00	70
472K	4700	± 10%	45	252.0	0.38	14.00	65
562K	5600	± 10%	45	252.0	0.36	16.00	60
682K	6800	± 10%	40	252.0	0.34	18.00	55
822K	8200	± 10%	40	252.0	0.32	24.50	50
103K	10000	± 10%	50	79.6	0.30	32.00	45
123K	12000	± 10%	50	79.6	0.28	36.00	40
153K	15000	± 10%	50	79.6	0.26	48.00	35
183K	18000	± 10%	45	79.6	0.24	52.00	30
223K	22000	± 10%	45	79.6	0.22	58.00	28
273K	27000	± 10%	45	79.6	0.20	62.00	26
333K	33000	± 10%	45	79.6	0.18	90.00	24
393K	39000	± 10%	40	79.6	0.17	100.00	22
473K	47000	± 10%	35	79.6	0.16	150.00	20
563K	56000	± 10%	35	79.6	0.15	200.00	18
683K	68000	± 10%	35	79.6	0.14	220.00	16
823K	82000	± 10%	30	79.6	0.12	240.00	14
104K	100000	± 10%	30	79.6	0.10	300.00	12

RCD COMPONENTS INC.

520 EAST INDUSTRIAL PARK DR., MANCHESTER, NEW HAMPSHIRE 03109-

USA (603) 669-8054 RCD-COMP MAN FAX (603) 669-5455

RCDCS00021