

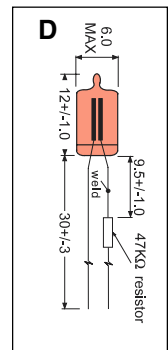



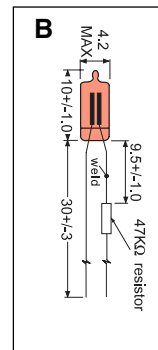

## Neon Glow Lamps (High Brightness) with Dark Effect

Line No.	Part No.	Color Off	Color On	Circuit Voltage	Breakdown V		Current mA	Series Resistor		Average Life (hours)	mcd	Drawing
					Maximum AC	DC		115V	220V			
9	N517	Clear	Red	90-115/220	95	135	1.0	47k $\Omega$	150k $\Omega$	20,000	5.0	A
10	N519	Clear	Red	90-115/220	95	135	1.0	47k $\Omega$	150k $\Omega$	20,000	5.0	B
11	N520A	Clear	Red	90-115/220	95	135	1.0	47k $\Omega$	150k $\Omega$	25,000	5.0	C
12	N522	Clear	Red	90-115/220	95	135	1.0	47k $\Omega$	150k $\Omega$	25,000	5.0	D

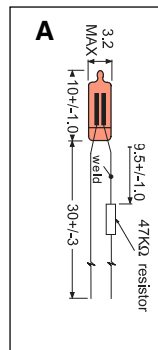

## Neon Glow Lamps (High Brightness) with Dark Effect & Resistor

Line No.	Part No.	Color Off	Color On	Circuit Voltage	Breakdown V		Current mA	Series Resistor 115V	Average Life (hours)	mcd	Drawing
					Maximum AC	DC					
1	N517R1	Clear	Red	90-115	95	135	1.0	47k $\Omega$	20,000	5.0	A
2	N519R1	Clear	Red	90-115	95	135	1.0	47k $\Omega$	20,000	5.0	B
3	N520R1	Clear	Red	90-115	95	135	1.0	47k $\Omega$	25,000	5.0	C
4	N522R1	Clear	Red	90-115	95	135	1.0	47k $\Omega$	25,000	5.0	D