


# S15VB20

## 200V 15A

### OUTLINE DIMENSIONS

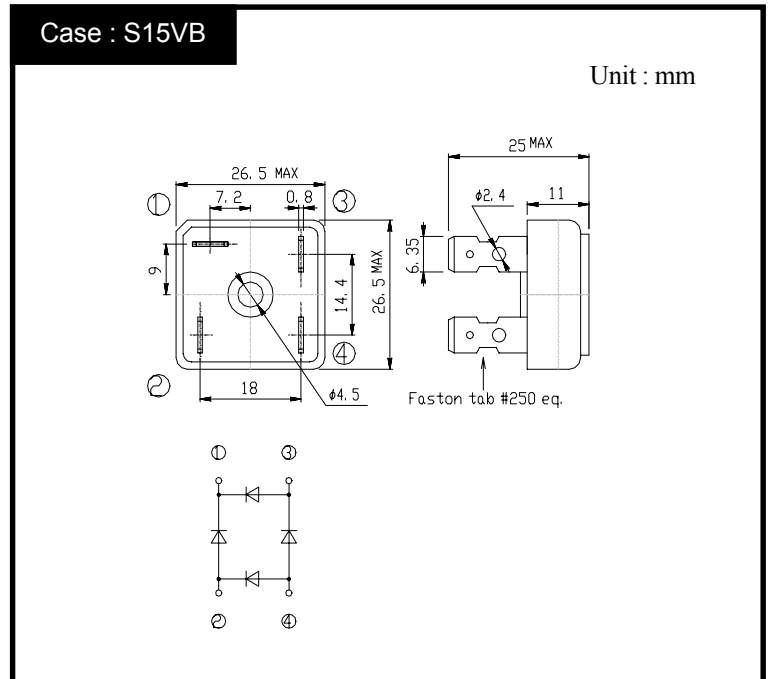

### RATINGS

#### ● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	$T_{stg}$		-40~150	°C
Operating Junction Temperature	$T_j$		150	°C
Maximum Reverse Voltage	$V_{RM}$		200	V
Average Rectified Forward Current	$I_O$	50Hz sine wave, R-load With heatsink, $T_c=83^\circ\text{C}$	15	A
		50Hz sine wave, R-load Without heatsink, $T_a=40^\circ\text{C}$	4.5	
Peak Surge Forward Current	$I_{FSM}$	50Hz sine wave, Non-repetitive 1cycle peak value, $T_j=25^\circ\text{C}$	200	A
Current Squared Time	$I^2t$	$2\text{ms} \leq t < 10\text{ms}$ $T_c=25^\circ\text{C}$	200	$\text{A}^2\text{s}$
Dielectric Strength	$V_{dis}$	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 1N·m)	2	N·m

#### ● Electrical Characteristics ( $T_c=25^\circ\text{C}$ )


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	$V_F$	$I_F=7.5\text{A}$ , Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	$I_R$	$V_R=V_{RM}$ , Pulse measurement, Rating of per diode	Max.10	$\mu\text{A}$
Thermal Resistance	$\theta_{jc}$	junction to case	Max.2.3	°C/W

S15VBx

Forward Voltage

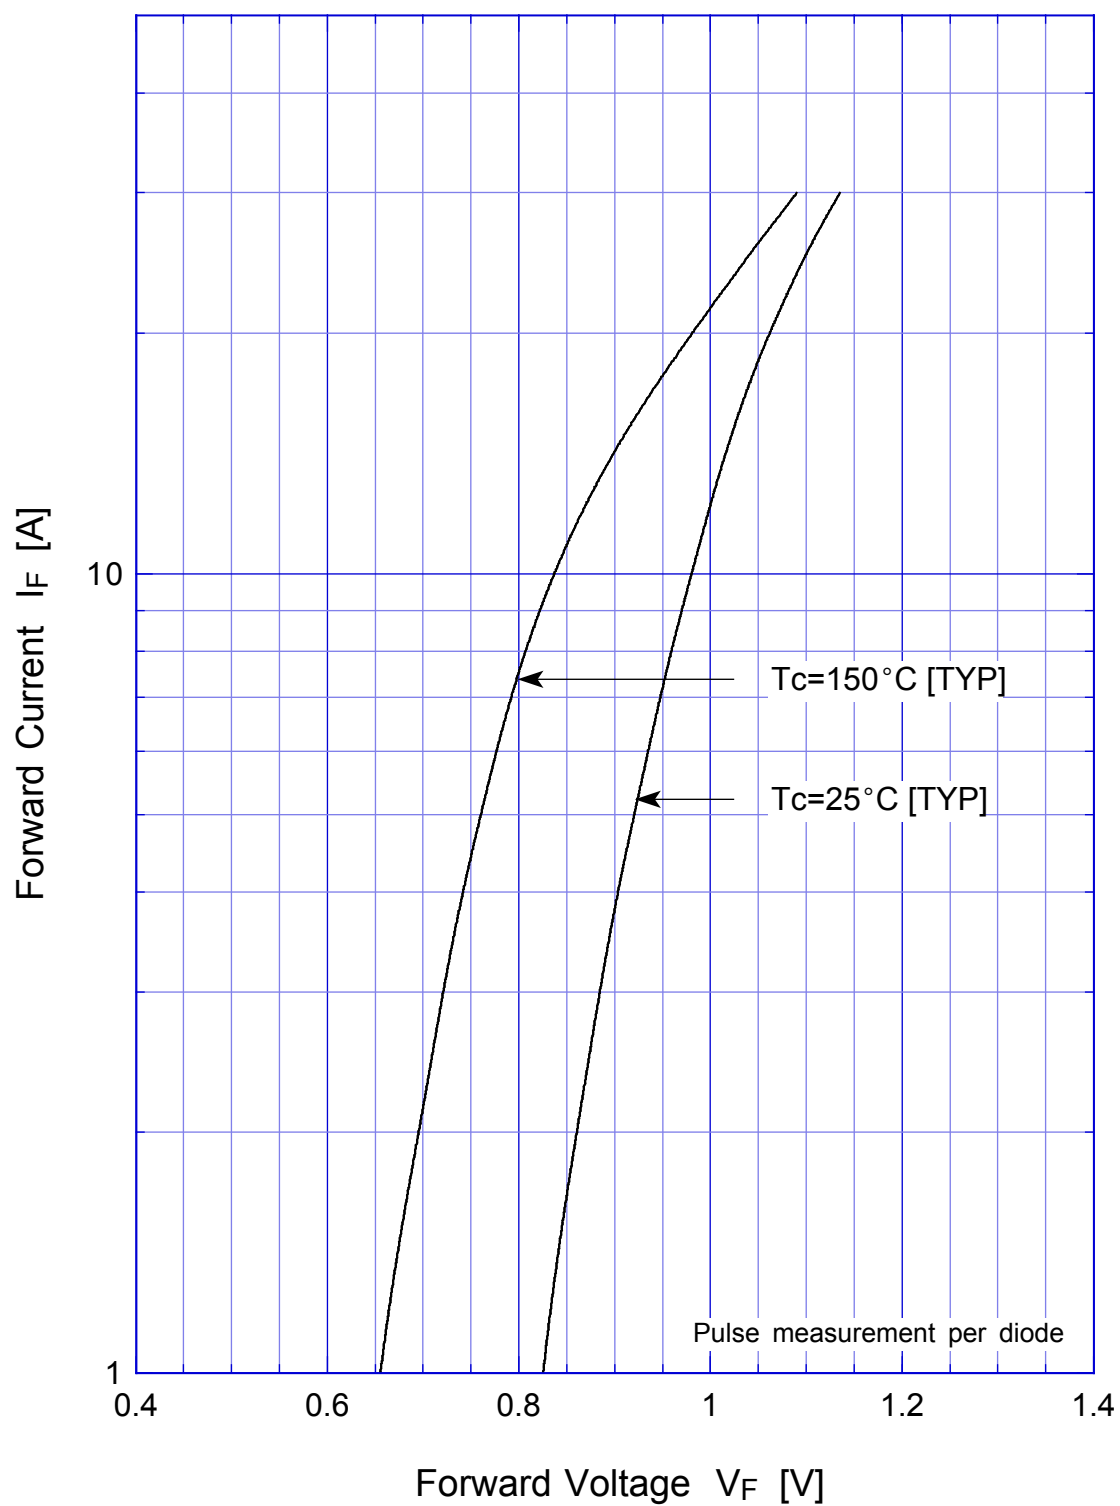


# S15VBx Forward Power Dissipation

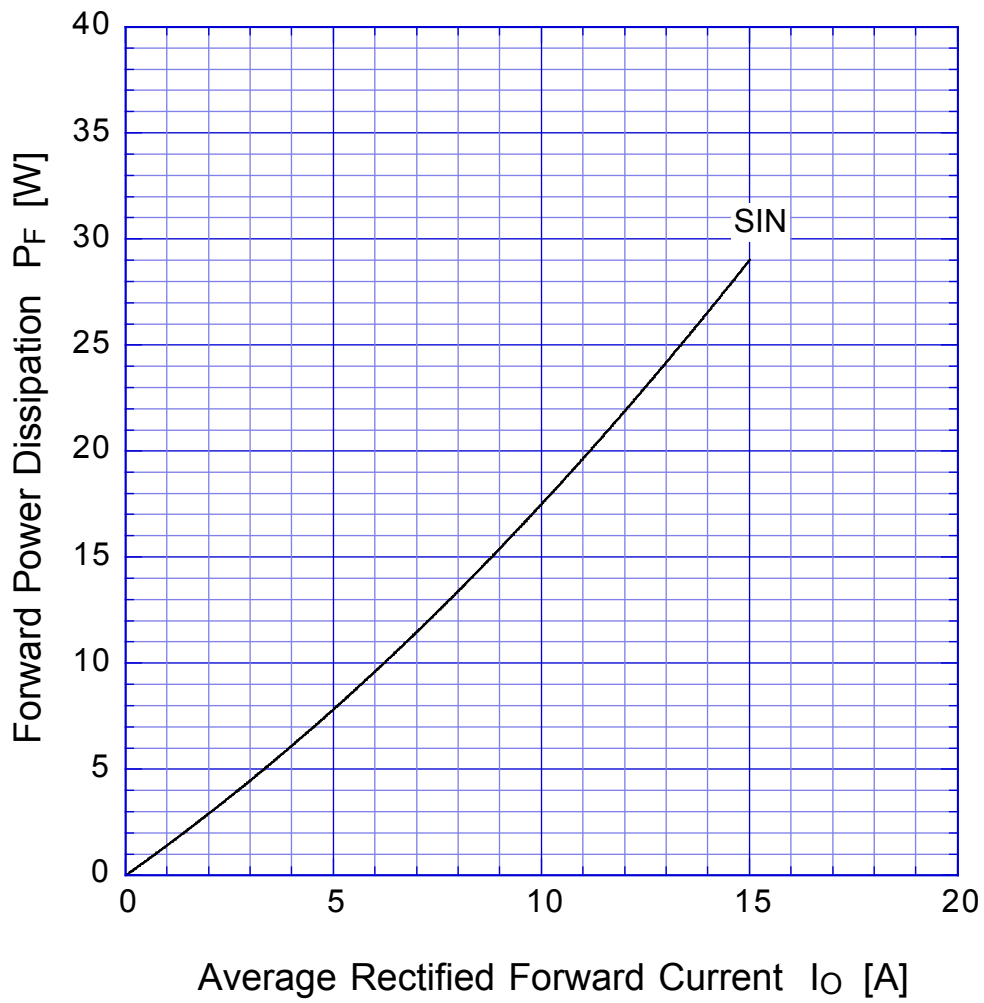

$T_j = 150^\circ\text{C}$   
Sine wave

# S15VBx

# Derating Curve

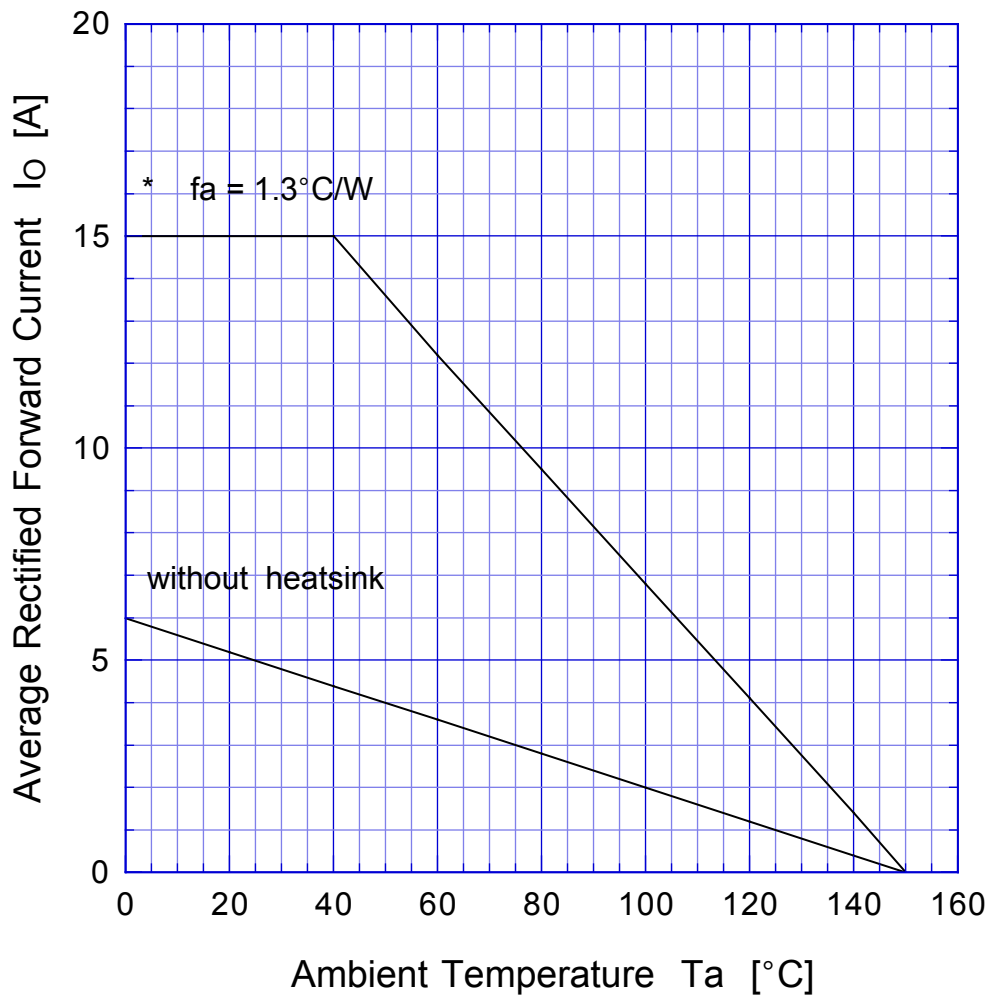

Sine wave

R-load

Free in air

\* with thermal compound, TOR=5kg-cm

# S15VBx

## Peak Surge Forward Capability

