


**L1001/1 TERMINAL**

This terminal has an easy grip, captive head containing a 4mm socket. It has a 2.1mm diameter crosshole in the clamping gap that is free from threads.

<b>CURRENT RATING:</b>	<b>15A</b>
<b>TEMPERATURE RANGE:</b>	<b>-25°C to +70°C</b>
<b>MATERIALS:</b>	<b>Head - phenolic resin Stem - brass, nickel-plated</b>
<b>COLOURS:</b>	<b>Head - black Disc - black or red</b>

**ORDERING REFERENCE: L1001/1BLACK, L1001/1/RED**

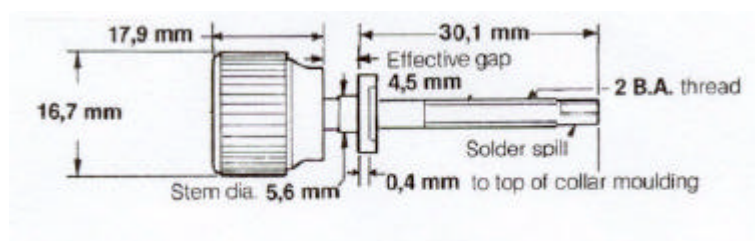

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England  
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: [blp@roxboro.com](mailto:blp@roxboro.com) <http://www.blpcomp.com>

A subsidiary of Dialight plc