
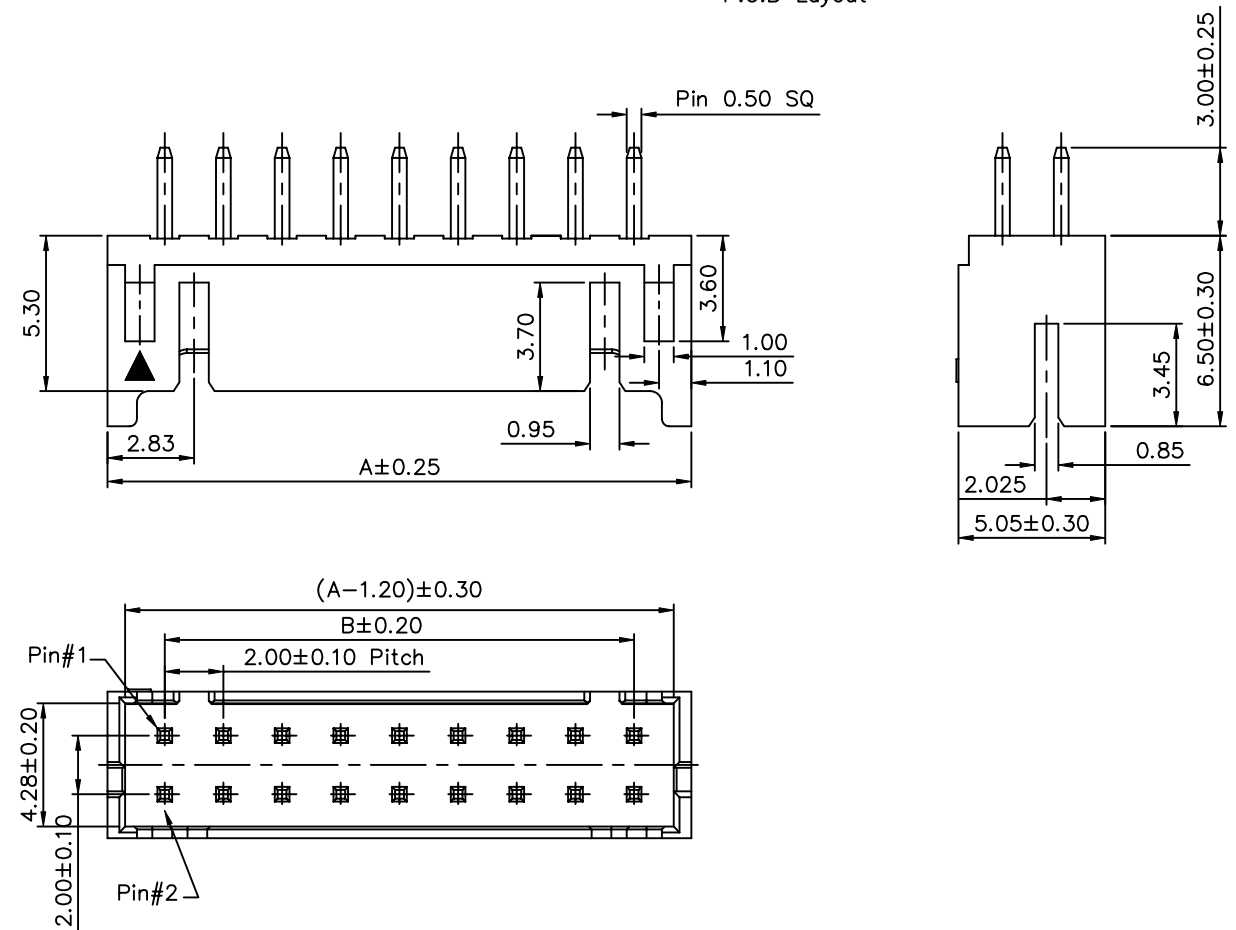


SPECIFICATION
 Current Rating: 2A AC/DC
 Voltage Rating: 250V AC/DC
 Temperature Range: -25°C~+85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 800V AC/Minute
 Insulator: PA66 UL94V-0, Natural
 Pin: Brass
 Finish: Tin Plated Over Nickel
 RoHS Compliant

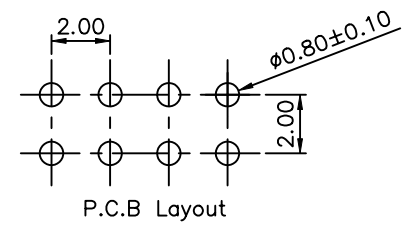

Poles	A	B
6	8.00	4.00
8	10.00	6.00
10	12.00	8.00
12	14.00	10.00
14	16.00	12.00
16	18.00	14.00
18	20.00	16.00
20	22.00	18.00
22	24.00	20.00
24	26.00	22.00
26	28.00	24.00
28	30.00	26.00
30	32.00	28.00
32	34.00	30.00
34	36.00	32.00

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ~10 ±0.15 20~30 ±0.30 30~ ±0.50 ANG ±2°				
PART No. PHDXXD-H		MEI						
DRAWING No. PHDXXD-H		CHECKED BY HZF						
		DRAWING BY PEGA						
SCALE	NONE	REV.	BO	UNIT mm	BO	NEW RELEASE	HZF	02/24/2009
					NO. REV.	REVISIONS	CHK	DATE