

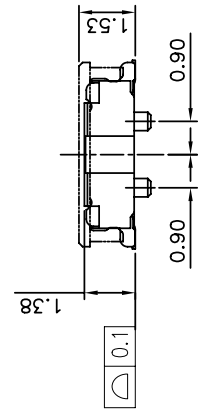
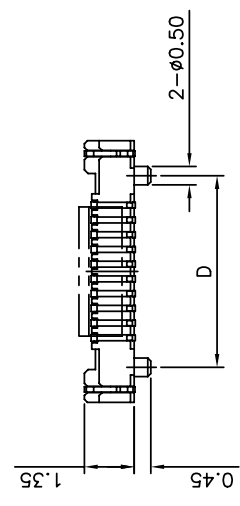


RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05

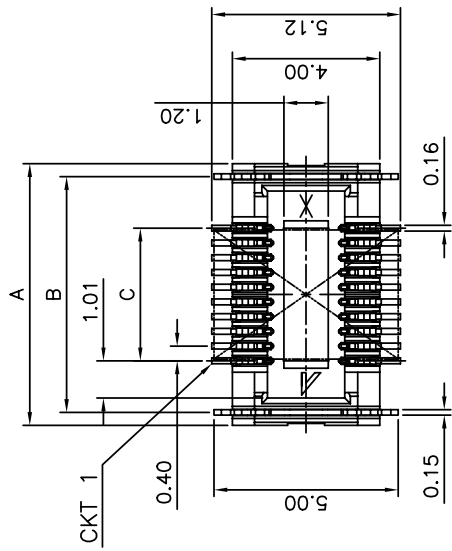

NOTES:

1. MATERIAL: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
- 1.2 CONTACT: COPPER ALLOY
2. FINISH: CONTACT: GOLD FLASH PLATING OVERALL. 50~100u" NICKEL UNDERPLATING OVERALL. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-50003-xxxx-xxx
5. PART NUMBER

50004-XXX X X-XXX

- NO OF CKT
- PACKING & REEL
- 0:TAPE & REEL
- 1:TUBE
- 7:TAPE & REEL WITH COVER
- 8:TUBE WITH COVER
- 1: G/F OVERALL
- PLATING

OPTION	HASIN CODE	FITTING	BRASS	PACKAGE
0	Black	Y	N	80665XXXTRP
1	Black	Y	Y	80665XXXTRP
2	Black	N	N	80665XXXTRP
3	Black	N	Y	80665XXXTRP

CKT	Dim A	Dim B	Dim C	Dim D
14	5.90	5.20	2.40	4.00
20	7.10	6.40	3.60	5.20
24	7.90	7.20	4.40	6.00
26	8.30	7.60	4.80	6.40
30	9.10	8.40	5.60	7.20
40	11.10	10.40	7.60	9.20
50	13.10	12.40	9.60	11.20
80	19.10	18.40	15.60	17.20

宏致電子股份有限公司  
Aces Electronic Co.,Ltd.

品名 (TITLE): 0.4 mm BTB CONNECTOR (RCPT) SMT S/T TYPE  
製圖 (DR): CARL  
圖號 (DWG.NO): 50004-XXXX-XXX  
審核 (CHKD): WARLES  
核准 (APPD): JASON

比例 (SCALE): 5:1  
單位 (UNITS): mm  
張數 (SHEET): 1 OF 1  
REV: A4 O

一般公差  
TOLERANCES  
X ±0.5  
XX ±0.15  
X ±0.25  
XXX ±0.1  
ANGLES ±2°

檢驗尺寸標示  
SYMBOLS  
CLASSIFICATION DIMENSION

MARK IS CRITICAL DIM.  
MARK IS MAJOR DIM.

表面處理 (FINISH)

0	數字"2"結案(ECN-0907051)	09/07/06	Keen
REV	修訂	日期	申請人
	REVISION DESCRIPTION	DATE	SIGNATURE