

6

5

4

3






2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	7440	RELEASED	01/16/07	
A		REVISED SHAPE	9/15/10	

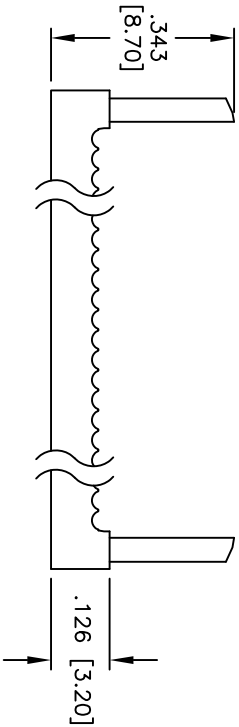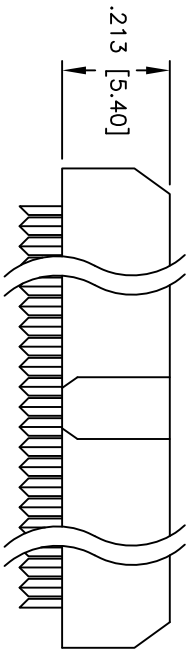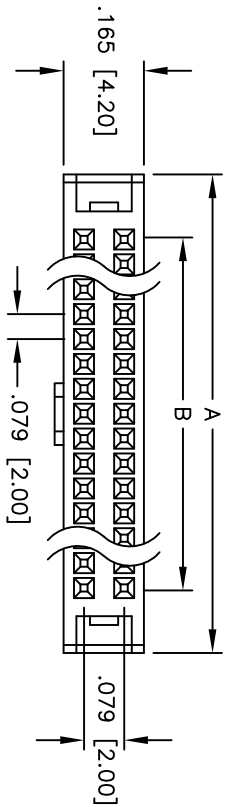

SPECIFICATIONS:

Material: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating: Gold flash over Nickel on contact area, Tin over copper underplate on IDC area.

Electrical: Current rating: 1 Amp.

Contact resistance: 1 ohms max.

Insulation resistance: 100 Mohms min. @ DC 500V

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating: Operating temperature: -40°C to +105°C

Environmental: Lead free, RoHS compliant

Positions: 6 thru 34, 38, 40, 44, 50, 60, 62, 64, 68
 A = .079 [2.00] x No. of Positions per Row + .205 [5.20]
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10 ±.15 ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXX ±.010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] FLAT CABLE IDC SOCKET

DRAWN	BW	01/16/07	SIZE	PART NO.	REV.
CHECKED			X	2FCS-XX-SG-PB	A
APPROVED			REF: S00087T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1