


MMB SERIES

◆ FEATURES


- Small and light.
- Reliability is excellent because these capacitors provide self-healing.
- Coated with flame-retardant (UL94 V-0) epoxy resin.
- RoHS compliance.

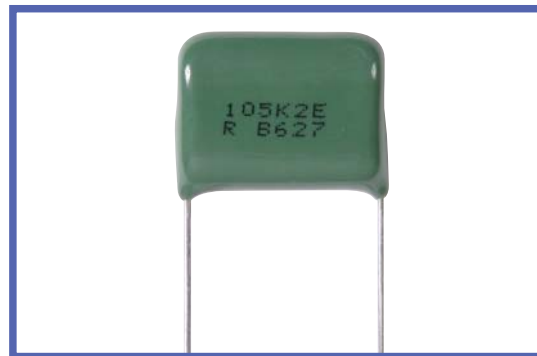

◆ SPECIFICATIONS

Category temperature	-40°C~+105°C (Derate the voltage as shown in the "CAUTION FOR PROPER USE OF FILM CAPACITORS" when using the capacitor beyond 85°C.)
Rated voltage (U _R)	100VDC, 250VDC, 400VDC, 630VDC
Capacitance tolerance	± 5%(J), ± 10%(K)
tanδ	0.01max at 1kHz
Voltage proof	U _R ×150% 60s
Insulation resistance	C ≤ 0.33μF:9000MΩmin C > 0.33μF:3000ΩFmin
Reference standard	JIS C 5101-2, JIS C 5101-1


◆ OUTLINE

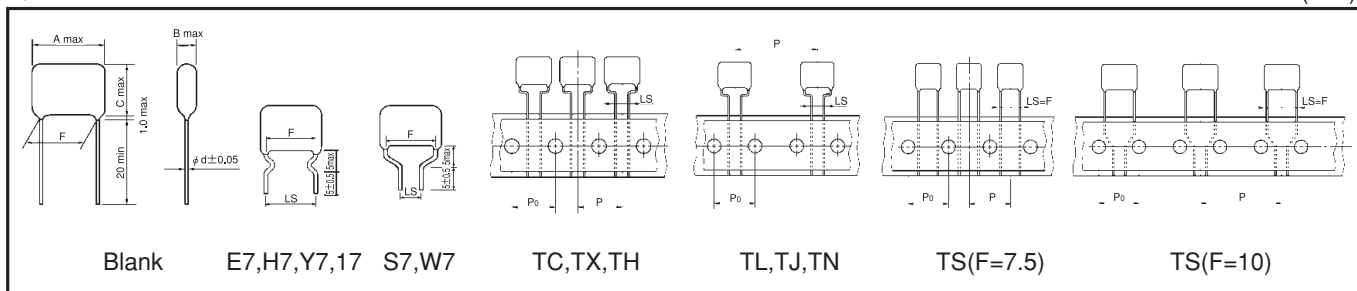

◆ PART NUMBER



◆ PERMISSIBLE CURRENT FOR FREQUENCY

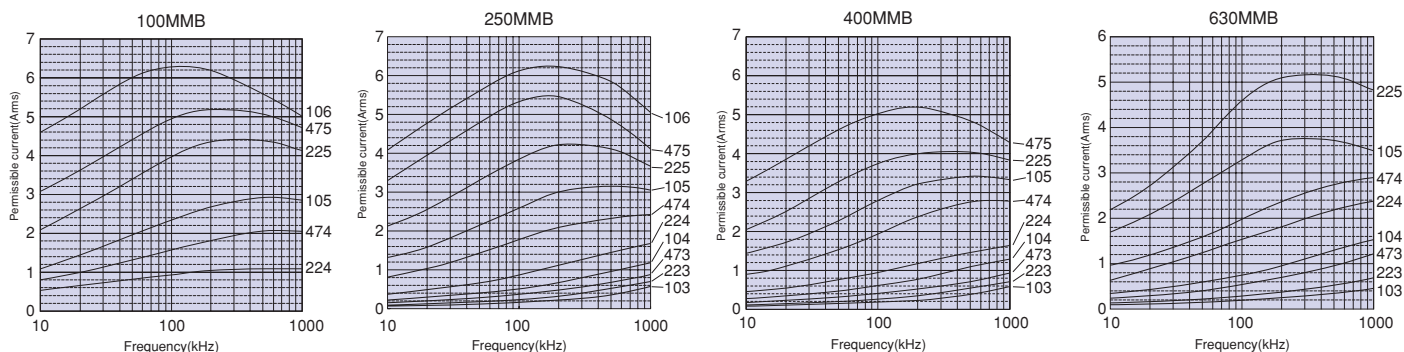

◆ STANDARD SIZE
 :Tolerance **:Suffix

RATED VOLTAGE	cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)								Part No.
								Long Lead type		Taping Ammo pack type - style						
		A	B	C	F ± 1.0	LS ± 0.5	d	Bag	Carton	TC	TX, TH	TL, TJ	TN	TS		
100 VDC	0.22	10.0	4.6	8.8	7.5	5.0/7.5	0.6	200	2,000	1,500	-	-	-	1,500	100MMB224□**	
	0.27	10.0	4.8	10.2	7.5	5.0/7.5	0.6	200	2,000	1,500	-	-	-	1,500	100MMB274□**	
	0.33	10.0	4.8	11.7	7.5	5.0/7.5	0.6	200	2,000	1,500	-	-	-	1,500	100MMB334□**	
	0.39	10.0	5.2	12.1	7.5	5.0/7.5	0.6	200	2,000	1,000	-	-	-	1,000	100MMB394□**	
	0.47	10.0	5.6	12.6	7.5	5.0/7.5	0.6	200	2,000	1,000	-	-	-	1,000	100MMB474□**	
	0.56	12.5	5.6	11.4	10.0	5.0/7.5/10.0	0.6	200	2,000	-	1,000	500	-	500	100MMB564□**	
	0.68	12.5	6.4	11.9	10.0	5.0/7.5/10.0	0.6	200	2,000	-	1,000	500	-	500	100MMB684□**	
	0.82	12.5	6.0	14.0	10.0	5.0/7.5/10.0	0.6	200	1,000	-	1,000	500	-	500	100MMB824□**	
	1	12.5	6.6	14.6	10.0	5.0/7.5/10.0	0.6	200	2,000	-	1,000	500	-	500	100MMB105□**	
	1.2	18.0	6.5	14.5	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	400	-	100MMB125□**	
	1.5	18.0	7.5	15.0	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	400	-	100MMB155□**	
	1.8	18.0	8.0	15.5	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	400	400	-	100MMB185□**	
	2.2	18.0	8.5	16.5	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	400	400	-	100MMB225□**	
	2.7	18.0	9.5	17.5	15.0	5.0/7.5/15.0	0.8	100	1,000	-	-	-	-	-	100MMB275□**	
	3.3	18.0	10.0	18.0	15.0	5.0/7.5/15.0	0.8	200	1,000	-	-	-	-	-	100MMB335□**	
	3.9	25.5	10.0	16.5	22.5	22.5	0.8	200	1,000	-	-	-	-	-	100MMB395□**	
	4.7	25.5	11.0	17.5	22.5	22.5	0.8	200	1,000	-	-	-	-	-	100MMB475□**	
	5.6	25.5	10.5	19.5	22.5	22.5	0.8	200	800	-	-	-	-	-	100MMB565□**	
6.8	25.5	11.5	20.5	22.5	22.5	0.8	100	500	-	-	-	-	-	100MMB685□**		
8.2	25.5	12.0	23.0	22.5	22.5	0.8	100	500	-	-	-	-	-	100MMB825□**		
10	25.5	13.0	24.0	22.5	22.5	0.8	100	500	-	-	-	-	-	100MMB106□**		
250 VDC	0.01	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB103□**	
	0.012	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB123□**	
	0.015	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB153□**	
	0.018	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB183□**	
	0.022	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB223□**	
	0.027	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB273□**	
	0.033	10.3	5.0	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB333□**	
	0.039	10.3	4.5	8.5	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB393□**	
	0.047	10.3	4.5	8.5	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB473□**	
	0.056	10.3	4.8	8.8	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB563□**	
	0.068	10.3	5.0	9.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB683□**	
	0.082	10.3	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	250MMB823□**	
	0.1	10.3	6.0	10.0	7.5	5.0/7.5	0.6	200	6,000	1,000	-	-	-	1,000	250MMB104□**	
	0.12	10.3	6.0	10.0	7.5	5.0/7.5	0.6	200	6,000	1,000	-	-	-	1,000	250MMB124□**	
	0.15	10.3	6.0	11.5	7.5	5.0/7.5	0.6	200	5,000	1,000	-	-	-	1,000	250MMB154□**	
	0.18	12.8	5.0	11.0	10.0	5.0/7.5/10.0	0.6	200	5,000	-	1,000	500	-	500	250MMB184□**	
	0.22	12.8	5.5	11.5	10.0	5.0/7.5/10.0	0.6	200	5,000	-	1,000	500	-	500	250MMB224□**	
	0.27	12.8	6.5	12.0	10.0	5.0/7.5/10.0	0.6	200	4,000	-	1,000	500	-	500	250MMB274□**	
	0.33	12.8	6.5	13.0	10.0	5.0/7.5/10.0	0.6	200	3,000	-	1,000	500	-	500	250MMB334□**	
	0.39	18.0	5.0	11.0	15.0	5.0/7.5/15.0	0.6	200	3,000	-	-	500	500	-	250MMB394□**	
	0.47	18.0	5.5	11.5	15.0	5.0/7.5/15.0	0.6	100	3,000	-	-	500	500	-	250MMB474□**	
	0.56	18.0	5.5	13.0	15.0	5.0/7.5/15.0	0.6	100	2,000	-	-	500	500	-	250MMB564□**	
	0.68	18.0	6.0	13.5	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	500	-	250MMB684□**	
	0.82	18.0	6.5	14.0	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	400	-	250MMB824□**	
	1	18.0	7.0	14.5	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	400	-	250MMB105□**	
	1.2	18.0	7.3	16.5	15.0	5.0/7.5/15.0	0.8	200	1,000	-	-	400	400	-	250MMB125□**	
	1.5	18.0	8.3	17.0	15.0	5.0/7.5/15.0	0.8	200	1,000	-	-	400	300	-	250MMB155□**	
	1.8	25.5	7.0	16.2	22.5	22.5	0.8	200	1,000	-	-	-	-	-	250MMB185□**	
	2.2	25.5	7.8	17.0	22.5	22.5	0.8	200	1,000	-	-	-	-	-	250MMB225□**	
	2.7	25.5	9.0	18.0	22.5	22.5	0.8	200	800	-	-	-	-	-	250MMB275□**	
	3.3	25.5	10.0	19.0	22.5	22.5	0.8	200	800	-	-	-	-	-	250MMB335□**	
	3.9	25.5	11.0	20.0	22.5	22.5	0.8	100	500	-	-	-	-	-	250MMB395□**	
4.7	25.5	12.3	21.3	22.5	22.5	0.8	100	500	-	-	-	-	-	250MMB475□**		
5.6	31.0	11.0	22.0	27.5	-	0.8	100	500	-	-	-	-	-	250MMB565□**		
6.8	31.0	12.5	23.3	27.5	-	0.8	100	400	-	-	-	-	-	250MMB685□**		
8.2	31.0	14.0	24.5	27.5	-	0.8	50	400	-	-	-	-	-	250MMB825□**		
10	31.0	15.7	26.3	27.5	-	0.8	50	300	-	-	-	-	-	250MMB106□**		

◆ STANDARD SIZE
 :Tolerance **:Suffix

RATED VOLTAGE	cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)								Part No.	
								Long Lead type		Taping Ammo pack type - style							
		A	B	C	F ±1.0	LS±0.5	d	Bag	Carton	TC	TX, TH	TL, TJ	TN	TS			
400 VDC	0.01	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	400MMB103	<input type="checkbox"/>	**
	0.012	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	400MMB123	<input type="checkbox"/>	**
	0.015	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	400MMB153	<input type="checkbox"/>	**
	0.018	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	400MMB183	<input type="checkbox"/>	**
	0.022	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	400MMB223	<input type="checkbox"/>	**
	0.027	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	400MMB273	<input type="checkbox"/>	**
	0.033	10.3	5.0	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	-	-	-	1,500	400MMB333	<input type="checkbox"/>	**
	0.039	12.8	5.0	8.0	10.0	5.0/7.5/10.0	0.6	200	6,000	-	1,500	500	-	500	400MMB393	<input type="checkbox"/>	**
	0.047	12.8	5.0	8.0	10.0	5.0/7.5/10.0	0.6	200	6,000	-	1,500	500	-	500	400MMB473	<input type="checkbox"/>	**
	0.056	12.8	5.5	8.5	10.0	5.0/7.5/10.0	0.6	200	6,000	-	1,500	500	-	500	400MMB563	<input type="checkbox"/>	**
	0.068	12.8	5.5	8.5	10.0	5.0/7.5/10.0	0.6	200	6,000	-	1,000	500	-	500	400MMB683	<input type="checkbox"/>	**
	0.082	12.8	5.5	8.5	10.0	5.0/7.5/10.0	0.6	200	5,000	-	1,000	500	-	500	400MMB823	<input type="checkbox"/>	**
	0.1	12.8	6.0	9.5	10.0	5.0/7.5/10.0	0.6	200	4,000	-	1,000	500	-	500	400MMB104	<input type="checkbox"/>	**
	0.12	18.0	5.5	9.0	15.0	5.0/7.5/15.0	0.6	200	4,000	-	-	500	500	-	400MMB124	<input type="checkbox"/>	**
	0.15	18.0	6.0	9.0	15.0	5.0/7.5/15.0	0.6	200	4,000	-	-	500	500	-	400MMB154	<input type="checkbox"/>	**
	0.18	18.0	6.5	9.5	15.0	5.0/7.5/15.0	0.6	200	3,000	-	-	500	500	-	400MMB184	<input type="checkbox"/>	**
	0.22	18.0	5.5	12.5	15.0	5.0/7.5/15.0	0.6	100	3,000	-	-	500	500	-	400MMB224	<input type="checkbox"/>	**
	0.27	18.0	6.0	13.0	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	500	-	400MMB274	<input type="checkbox"/>	**
	0.33	18.0	6.5	13.5	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	400	-	400MMB334	<input type="checkbox"/>	**
	0.39	18.0	7.0	14.5	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	400	-	400MMB394	<input type="checkbox"/>	**
0.47	18.0	7.5	16.0	15.0	5.0/7.5/15.0	0.8	100	1,000	-	-	500	400	-	400MMB474	<input type="checkbox"/>	**	
0.56	25.5	6.0	15.0	22.5	22.5	0.8	200	1,000	-	-	-	-	-	400MMB564	<input type="checkbox"/>	**	
0.68	25.5	6.5	15.5	22.5	22.5	0.8	200	1,000	-	-	-	-	-	400MMB684	<input type="checkbox"/>	**	
0.82	25.5	7.0	16.5	22.5	22.5	0.8	200	1,000	-	-	-	-	-	400MMB824	<input type="checkbox"/>	**	
1	25.5	7.5	18.5	22.5	22.5	0.8	200	1,000	-	-	-	-	-	400MMB105	<input type="checkbox"/>	**	
1.2	25.5	8.5	18.5	22.5	22.5	0.8	200	800	-	-	-	-	-	400MMB125	<input type="checkbox"/>	**	
1.5	31.0	8.5	19.0	27.5	-	0.8	200	800	-	-	-	-	-	400MMB155	<input type="checkbox"/>	**	
1.8	31.0	9.0	20.0	27.5	-	0.8	100	500	-	-	-	-	-	400MMB185	<input type="checkbox"/>	**	
2.2	31.0	10.5	21.0	27.5	-	0.8	100	500	-	-	-	-	-	400MMB225	<input type="checkbox"/>	**	
2.7	31.0	12.0	22.0	27.5	-	0.8	100	500	-	-	-	-	-	400MMB275	<input type="checkbox"/>	**	
3.3	31.0	13.0	24.0	27.5	-	0.8	50	400	-	-	-	-	-	400MMB335	<input type="checkbox"/>	**	
3.9	31.0	14.5	25.0	27.5	-	0.8	50	400	-	-	-	-	-	400MMB395	<input type="checkbox"/>	**	
4.7	31.0	16.0	27.0	27.5	-	0.8	50	300	-	-	-	-	-	400MMB475	<input type="checkbox"/>	**	
630 VDC	0.01	12.8	4.5	8.0	10.0	5.0/7.5/10.0	0.6	200	6,000	-	1,500	500	-	500	630MMB103	<input type="checkbox"/>	**
	0.012	12.8	5.0	8.0	10.0	5.0/7.5/10.0	0.6	200	6,000	-	1,500	500	-	500	630MMB123	<input type="checkbox"/>	**
	0.015	12.8	5.3	8.5	10.0	5.0/7.5/10.0	0.6	200	5,000	-	1,000	500	-	500	630MMB153	<input type="checkbox"/>	**
	0.018	12.8	5.5	10.0	10.0	5.0/7.5/10.0	0.6	200	5,000	-	1,000	500	-	500	630MMB183	<input type="checkbox"/>	**
	0.022	12.8	5.5	10.0	10.0	5.0/7.5/10.0	0.6	200	5,000	-	1,000	500	-	500	630MMB223	<input type="checkbox"/>	**
	0.027	12.8	5.5	10.5	10.0	5.0/7.5/10.0	0.6	200	5,000	-	1,000	500	-	500	630MMB273	<input type="checkbox"/>	**
	0.033	12.8	6.0	11.0	10.0	5.0/7.5/10.0	0.6	200	5,000	-	1,000	500	-	500	630MMB333	<input type="checkbox"/>	**
	0.039	12.8	6.0	13.0	10.0	5.0/7.5/10.0	0.6	200	4,000	-	1,000	500	-	500	630MMB393	<input type="checkbox"/>	**
	0.047	12.8	6.5	13.3	10.0	5.0/7.5/10.0	0.6	200	4,000	-	1,000	500	-	500	630MMB473	<input type="checkbox"/>	**
	0.056	18.0	5.5	10.3	15.0	5.0/7.5/15.0	0.6	200	4,000	-	-	500	500	-	630MMB563	<input type="checkbox"/>	**
	0.068	18.0	6.0	10.7	15.0	5.0/7.5/15.0	0.6	200	3,000	-	-	500	500	-	630MMB683	<input type="checkbox"/>	**
	0.082	18.0	6.0	11.2	15.0	5.0/7.5/15.0	0.6	100	3,000	-	-	500	500	-	630MMB823	<input type="checkbox"/>	**
	0.1	18.0	6.0	13.0	15.0	5.0/7.5/15.0	0.6	100	3,000	-	-	500	500	-	630MMB104	<input type="checkbox"/>	**
	0.12	18.0	6.5	13.5	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	500	-	630MMB124	<input type="checkbox"/>	**
	0.15	18.0	7.0	14.2	15.0	5.0/7.5/15.0	0.8	100	2,000	-	-	500	400	-	630MMB154	<input type="checkbox"/>	**
	0.18	18.0	7.5	15.0	15.0	5.0/7.5/15.0	0.8	100	1,000	-	-	400	400	-	630MMB184	<input type="checkbox"/>	**
	0.22	18.0	8.3	15.6	15.0	5.0/7.5/15.0	0.8	200	1,000	-	-	400	300	-	630MMB224	<input type="checkbox"/>	**
	0.27	25.5	7.0	14.5	22.5	22.5	0.8	200	1,000	-	-	-	-	-	630MMB274	<input type="checkbox"/>	**
	0.33	25.5	7.8	15.0	22.5	22.5	0.8	200	1,000	-	-	-	-	-	630MMB334	<input type="checkbox"/>	**
	0.39	25.5	8.0	17.0	22.5	22.5	0.8	200	1,000	-	-	-	-	-	630MMB394	<input type="checkbox"/>	**
	0.47	25.5	8.8	18.0	22.5	22.5	0.8	200	800	-	-	-	-	-	630MMB474	<input type="checkbox"/>	**
	0.56	25.5	9.0	20.0	22.5	22.5	0.8	200	800	-	-	-	-	-	630MMB564	<input type="checkbox"/>	**
0.68	25.5	10.3	21.0	22.5	22.5	0.8	100	500	-	-	-	-	-	630MMB684	<input type="checkbox"/>	**	
0.82	31.0	9.8	20.5	27.5	-	0.8	100	500	-	-	-	-	-	630MMB824	<input type="checkbox"/>	**	
1	31.0	11.0	22.0	27.5	-	0.8	100	500	-	-	-	-	-	630MMB105	<input type="checkbox"/>	**	
1.2	31.0	12.5	23.0	27.5	-	0.8	100	400	-	-	-	-	-	630MMB125	<input type="checkbox"/>	**	
1.5	31.0	14.0	24.5	27.5	-	0.8	50	400	-	-	-	-	-	630MMB155	<input type="checkbox"/>	**	
1.8	31.0	15.5	26.0	27.5	-	0.8	50	300	-	-	-	-	-	630MMB185	<input type="checkbox"/>	**	
2.2	31.0	17.0	28.0	27.5	-	0.8	50	300	-	-	-	-	-	630MMB225	<input type="checkbox"/>	**	