
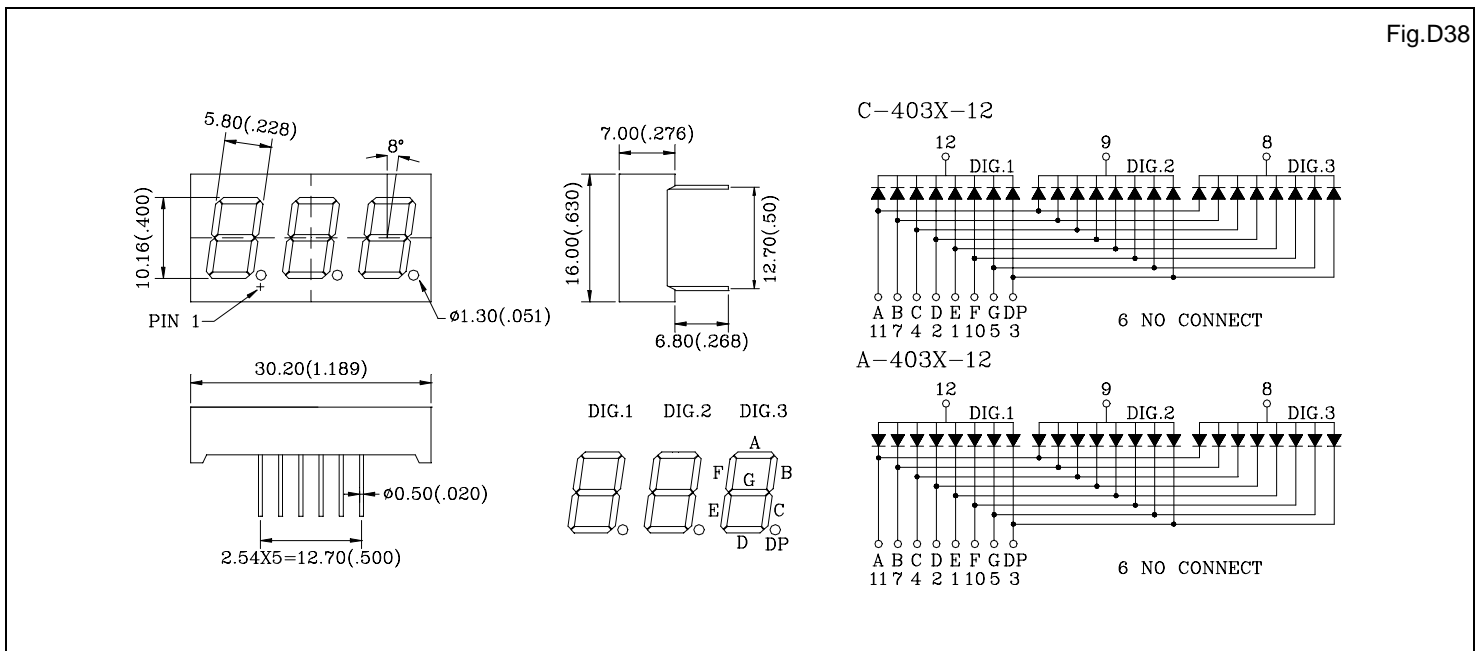


C/A-403X, C/A-403X-12 THREE DIGITS DISPLAY

Shape	Part No.		Chip		Wave Length λ p(nm)	Electro-Optical Characteristics			Fig. No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		Vf(V)20mA		Iv(ucd)10mA	
						Typ.	Max.	Typ.	
	C-403H	A-403H	GaP	Red	700	2.1	2.8	550	D37
	C-403E	A-403E	GaAsP/GaP	Hi.effi Red	635	2.0	2.8	1800	
	C-403G	A-403G	GaP	Green	565	2.1	2.8	1600	
	C-403Y	A-403Y	GaAsP/GaP	Yellow	585	2.1	2.8	1500	
	C-403SR	A-403SR	GaAlAs	Super Red	660	1.8	2.4	21000	
	C-403H-12	A-403H-12	GaP	Red	700	2.1	2.8	550	D38
	C-403E-12	A-403E-12	GaAsP/GaP	Hi.effi Red	635	2.0	2.8	1800	
	C-403G-12	A-403G-12	GaP	Green	565	2.1	2.8	1600	
	C-403Y-12	A-403Y-12	GaAsP/GaP	Yellow	585	2.1	2.8	1500	
	C-403SR-12	A-403SR-12	GaAlAs	Super Red	660	1.8	2.4	21000	

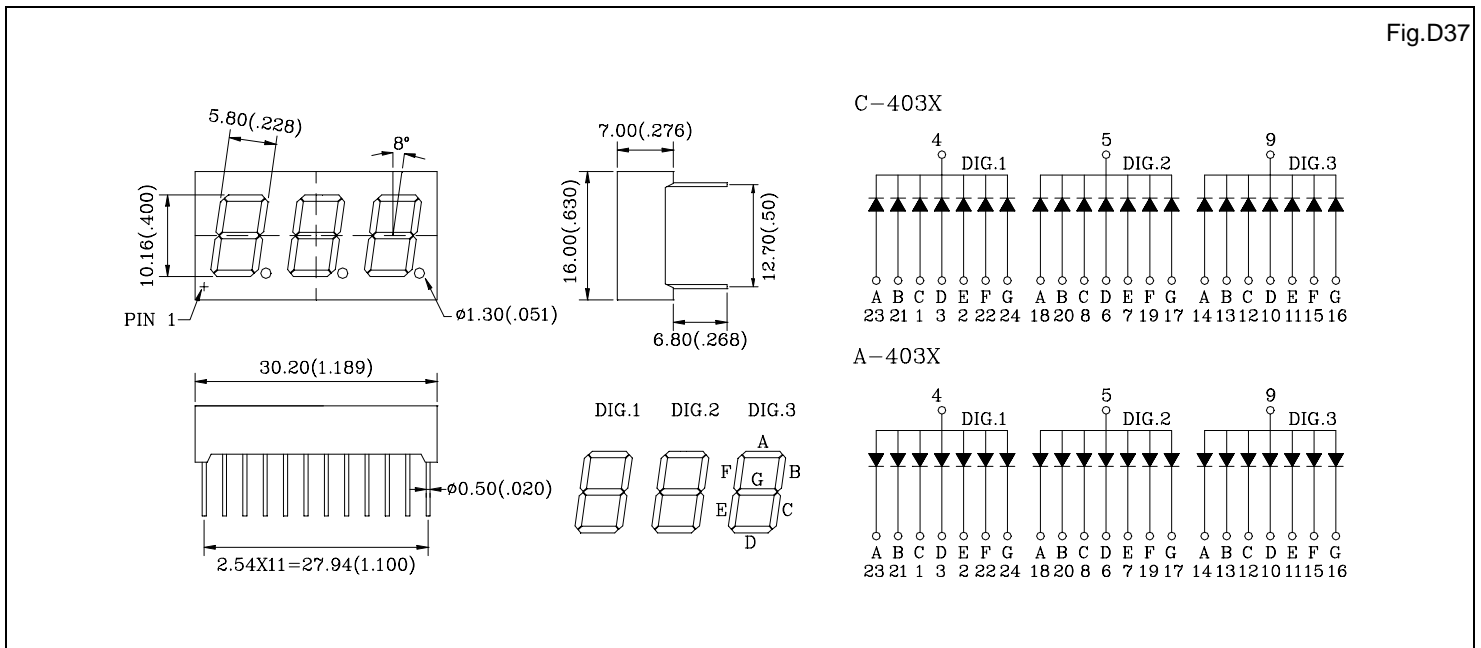

1.All dimension are in millimeters (inches).
2.Tolerance is ± 0.25 mm (0.01") unless otherwise specified.