
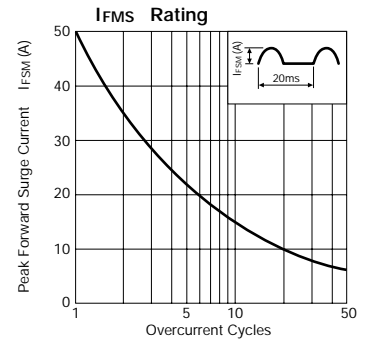

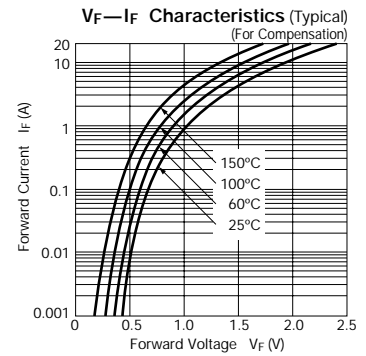
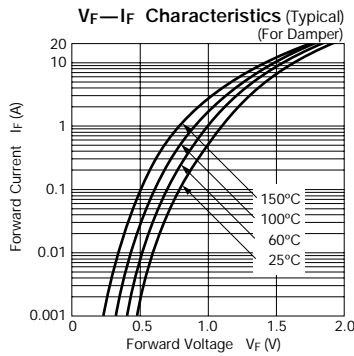







# Damper diode (Diode modulation for Displays)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)						Others	
	VRM (V)	IF(AV) (A)	IFSM (A) 50Hz Half-cycle Sinewave Single Shot	TJ (°C)	Tstg (°C)	VF (V)	IR (μA)	IR(H) (mA)	t <sub>rr</sub> (1) (μs)	t <sub>rr</sub> (2) (μs)	Rth(j-ℓ) (°C/W)	Mass (g)	Fig.
						max	IF (A)	VR=VRM max	VR=VRM Ta=100°C max	IF/IRP (mA)	IF/IRP (mA)		
FMP-3FU	1500	5.0	50	-40 to +150	5.0	2.0	50	0.5	0.7	0.3	1.8	6.5	Ⓐ
	600					2.5							
FMQ-3GU	1700	5.0	50	-40 to +150	5.0	2.0	500	1.0	0.7	0.3	1.8	6.5	Ⓐ
	800					4.0	100	0.5	0.07	0.04			
FMP-2FUR	1500	5.0	50	-40 to +150	5.0	2.0	50	3.0 (TJ=150°C)	0.7	0.3	4.0	2.1	Ⓑ
	600					2.5			0.1	0.05			

## FMP-3FU




## FMO-3GU

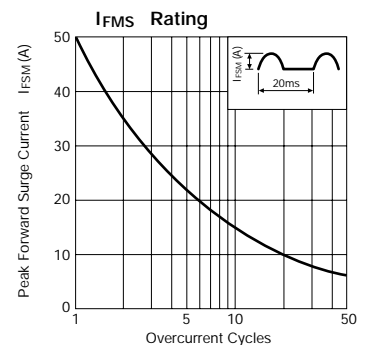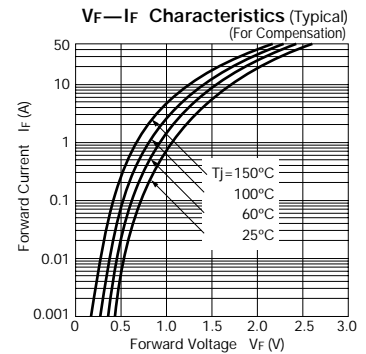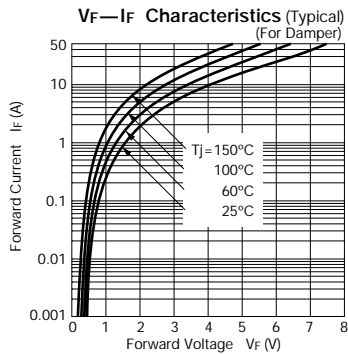


**FMP-2FUR**


**IF(AV)—PF(AV) Characteristics**



**Tc—IF(AV) Derating**



**IFSM Rating**

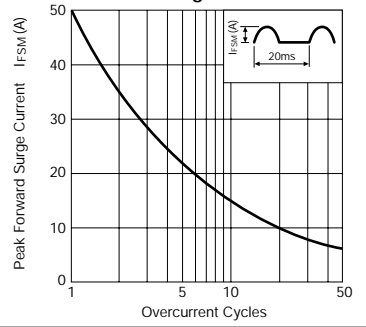

**External Dimensions**  
(Unit: mm) (Full-mold)

Flammability:  
UL94V-0 or Equivalent

- A: Damper Diodes
- B: Compensation diode

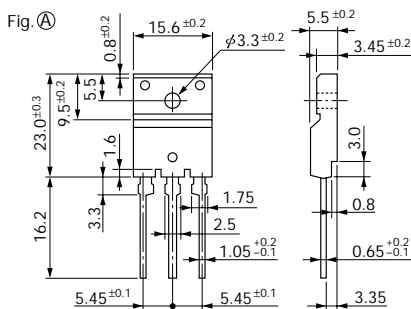


Fig. (B)

