



Printed-circuit board connector - MC 1,5/ 6-G-3,5 THT PIN26-R56 - 1958698

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 6, Pitch: 3.5 mm, Color: black, Contact surface: Tin, User information and design recommendations for through hole reflow technology can be found under "Downloads"

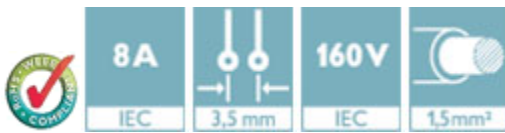

Key Commercial Data

Packing unit	1
GTIN	 4 017918 898465
Custom tariff number	85366990

Technical data

Dimensions

Pitch	3.50 mm
Dimension a	17.5 mm
Constructional height	8 mm
Length of the solder pin	2.6 mm
Pin dimensions	0,8 x 0,8 mm

General

Range of articles	MC 1,5/...-G-THT
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Color	black
Number of positions	6

Printed-circuit board connector - MC 1,5/ 6-G-3,5 THT PIN26-R56 - 1958698

Technical data

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

EAC / cULus Recognized / EAC

Ex Approvals

Printed-circuit board connector - MC 1,5/ 6-G-3,5 THT PIN26-R56 - 1958698

Approvals

Approvals submitted

Approval details

EAC

cULus Recognized		
	B	D
Nominal current I _N	8 A	8 A
Nominal voltage U _N	300 V	300 V

EAC
