

# SCREW MOUNT DIP SOCKETS IC & ICS SERIES

**Mates with:**  
AP, APS, APO,  
APA, APE, APH

## Highest reliability DIP sockets

IC and ICS series DIP sockets feature U.L. rated G.F. polyester body with mounting holes and use precision machined lead sockets for high reliability in the most demanding applications.

## Specifications: IC & ICS



**Insulator Material:** Black Glass Filled Polyester  
**Flammability Rating:** UL 94V-O

**Insulation Resistance:** 5000 megohm @ 500 VDC  
**Temperature Range:** -65°C to +125°C

**Withstanding Voltage:** 1000 VRMS @ 60 Hz

**Contact:** BeCu  
**Shell:** Brass except style K Phosphor Bronze

**Plating:** Au over 50µ" Ni or Sn over 100µ" Cu or 50µ" Ni

**Current Rating:** 1 amp continuous @ 100 VDC per contact

**Contact Resistance:** 10 milliohms @ 200 milliamp

**Socket Retention in Body:** 5 lbs against barb

**Lead Size Range:** .015" to .022" DIA and most IC leads

**Insertion Force:** Standard = 9 oz avg, 16 oz max (.017" DIA probe); Low Insertion Force = 2.5 oz avg, 5.5 oz max (.018" DIA probe)

**Withdrawal Force:** Standard = 2.5 oz avg, 1.5 oz min (after 12 insertions with .017" DIA probe); Low Insertion Force = 2.0 oz avg, 0.35 oz min (after 12 insertions with .018" DIA probe)

**Note:** Some sizes, styles and options are non-standard, non-returnable.

TYPE SOCKET	ROW SPACING & NO. OF CONTACTS
IC = IC Socket	
ICS = IC Socket	

**-S\*, -A\*, -J, or -K**  
= Printed Circuit  
\*For LIF Specify -ZS or -ZA

LEAD STYLE	X DIA	Y TAIL	Z
-S or -ZS	(0,51) .020	(3,18) .125	(7,62) 300
-A or -ZA	(0,51) .020	(4,57) .180	(8,89) 350
-J	(0,64) .025	(10,41) .410	(15,24) 600
-K	(0,89) .035	(12,95) .510	(17,86) 703

Locking lead (-L) available. See OPTION.


Style S, ZS, A, ZA & J Insertion Depth = .095" to .150"  
Style S Component Part No. = SC-1P1  
Style ZS Component Part No. = EZ-1P1  
Style A Component Part No. = SC-6P1  
Style ZA Component Part No. = EZ-6P1  
Style J Component Part No. = SC-1P3  
Option L Insertion Depth = .095" to .150"  
Option L Component Part No. = SC-1L1 or EZ-1L1  
Style K Insertion Depth = .125" to .170"  
Style K Component Part No. = SC-2P1

Low Insertion Force (LIF) Contacts Available.


<b>-306</b> = .300 Row 6Contacts	<b>-314</b> = .300 Row 14 Contacts	<b>-610</b> = .600 Row 10 Contacts
<b>-308</b> = .300 Row 8 Contacts	<b>-316</b> = .300 Row 16 Contacts	<b>-614</b> = .600 Row 14 Contacts
<b>-310</b> = .300 Row 10 Contacts	<b>-318</b> = .300 Row 18 Contacts	<b>-616</b> = .600 Row 16 Contacts
	<b>-320</b> = .300 Row 20 Contacts	<b>-618</b> = .600 Row 18 Contacts
	<b>-324</b> = .300 Row 24 Contacts	
	<b>-422</b> = .400 Row 22 Contacts	
	<b>-424</b> = .400 Row 24 Contacts	

Part No.	A Length	B Width
IC or ICS-306	(8,89) .350	(10,16) .400
IC or ICS-308	(11,43) .450	(10,16) .400
*IC or *ICS-310	(13,97) .550	(10,16) .400


\* Mounting hole off center on 10 position.



Part No.	A Length	B Width	E Mnt Holes
IC or ICS-314	(17,78) .700	(10,16) .400	(10,16) .400
IC or ICS-316	(20,32) .800	(10,16) .400	(12,70) .500
IC or ICS-318	(22,86) .900	(10,16) .400	(15,24) .600
IC or ICS-320	(25,40) 1.000	(10,16) .400	(17,78) .700
IC or ICS-324	(30,48) 1.200	(10,16) .400	(22,86) .900
IC or ICS-422	(27,94) 1.100	(10,16) .400	(20,32) .800
IC-424	(30,48) 1.200	(12,70) .500	(22,86) .900

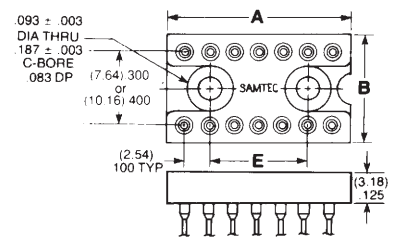


Part No.	A Length
IC-610	(12,70) .500
IC-614	(17,78) .700
IC-616	(20,32) .800
IC-618	(22,86) .900



Due to technical progress, all designs, specifications and components are subject to change without notice.

**WWW.SAMTEC.COM**

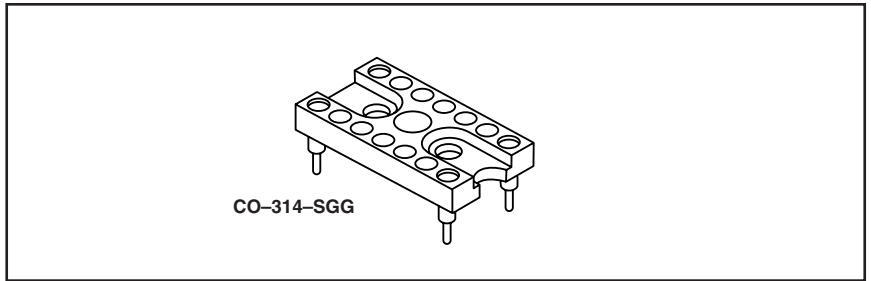

**LEAD STYLE**      **PLATING OPTION**      **OPTION**  
(Leave Blank for Standard Version)

**-W**  
= Wire-Wrap  
For LIF Specify -ZW

Shorter w/w tail lengths available. See OPTION.

Insertion Depth = .125" to .170"  
 Style W Component Part No. = SC-1W1(1)  
 Style ZW Component Part No. = EZ-1W1(1)  
 Style W-2 Component Part No. = SC-1W1(2)  
 Style ZW-2 Component Part No. = EZ-1W1(2)  
 Style W-3 Component Part No. = SC-1W1(3)  
 Style ZW-3 Component Part No. = EZ-1W1(3)

**-E or -H**  
= Elevated  
For LIF Specify -ZE or -ZH

LEAD STYLE	X DIA	W TAIL	Y	Z
-E or -ZE	(0.51) .020	(4.32) .170	(8.86) .349	(13.77) .543
-H or -ZH	(0.46) .018	(3.81) .150	(12.95) .510	(17.86) .703

Insertion Depth = .125" to .175"  
 Style E Component Part No. = SC-2P3  
 Style ZE Component Part No. = EZ-2P3  
 Style H Component Part No. = SC-2P2  
 Style ZH Component Part No. = EZ-2P2

**GG**  
= 30µ" Gold Contact  
10µ" Gold Shell

**GT**  
= 30µ" Gold Contact  
Tin Shell

**TT**  
= Tin Contact and Shell  
(-S, -ZS, -W, -ZW, -A, -H only)

**ST**  
= 10µ" Gold Contact  
Tin Shell  
(-S & -ZS only)

**-2**  
= (9.14) .360 Wire-Wrap Tail

**-3**  
= (6.60) .260 Wire-Wrap Tail

Requires Style -S or -ZS and .035"±.003" board hole.

**-L**  
= Locking Socket

- 624 = .600 Row / 24 Contacts
- 628 = .600 Row / 28 Contacts
- 632 = .600 Row / 32 Contacts
- 640 = .600 Row / 40 Contacts
- 940 = .900 Row / 40 Contacts
- 950 = .900 Row / 50 Contacts
- 964 = .900 Row / 64 Contacts

Part No.	A Length	B Width
IC or ICS-624	(30.48) 1.200	(17.78) .700
IC or ICS-628	(35.56) 1.400	(17.78) .700
IC or ICS-632	(40.64) 1.600	(17.78) .700
IC or ICS-640	(50.80) 2.000	(17.78) .700
*IC-940	(63.50) 2.500	(26.27) 1.050
*IC-950	(63.50) 2.500	(26.27) 1.050
IC-964	(81.28) 3.200	(26.27) 1.050

\*IC-940 and IC-950 are non-standard non-returnable.  
 †Mounting hole off center on 50 positions

**CRYSTAL OSCILLATOR CO SERIES**

**SPECIFY PART NUMBER FROM CHART BELOW**      **OPTION**  
(Leave Blank for Standard Version)

Part Number	Termination Suffix*		Number of Contacts	Contact Finish	Shell Finish
	P.C.	W/W			
CO-314	-SGG	-WGG	4	Gold Gold Tin	Gold Tin Tin
	-SGT	-WGT			
	-STT	-WTT			
CO-316	-SGG	-WGG	4	Gold Gold Tin	Gold Tin Tin
	-SGT	-WGT			
	-STT	-WTT			
CO-624	-SGG	-WGG	4	Gold Gold Tin	Gold Tin Tin
	-SGT	-WGT			
	-STT	-WTT			

**-2**  
= (9.14) .360 Wire-Wrap Tail

**-3**  
= (6.60) .260 Wire-Wrap Tail

Requires Style -W or -ZW

Specify desired suffix for shorter Wire-Wrap tail.

\*For LIF contacts substitute -ZS for -S and -ZW for -W.

**Crystal Oscillator**  
 Accepts any component leads from .015" to .022" diameter. Low profile with precision machined lead sockets for high retention and reliability.

**Specifications:**  
**CO**  
 Same as IC Series.

CO-314 shown

Due to technical progress, all designs, specifications and components are subject to change without notice.