

U6SBA60

600V 6A


FEATURES

- Thin Single In-Line Package
- UL Recognized
(UL File No.E142422)
- High IFSM
- Applicable to Automatic Insertion

APPLICATION

- Switching power supply
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

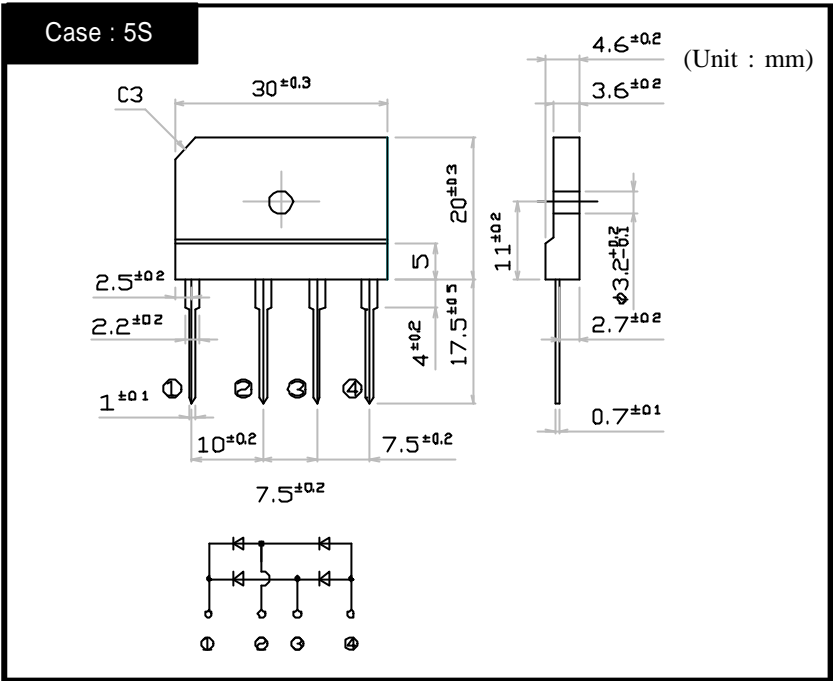

RATINGS

Absolute Maximum Ratings (If not specified Tc=25)


| Item | Symbol | Conditions | Ratings | Unit |
|-----------------------------------|------------------|---|-----------|------------------|
| Storage Temperature | Tstg | | -40 ~ 150 | |
| Operating Junction Temperature | Tj | | 150 | |
| Maximum Reverse Voltage | V _{RM} | | 600 | V |
| Average Rectified Forward Current | I _O | 50Hz sine wave, R-load With heatsink Tc=111 | 6 | A |
| | | 50Hz sine wave, R-load Without heatsink Ta=25 | 2.8 | |
| Peak Surge Forward Current | I _{FSM} | 50Hz sine wave, Non-repetitive 1cycle peak value, Tj=25 | 120 | A |
| Current Squared Time | I ² t | 1ms t<10ms Tj=25 | 60 | A ² s |
| Dielectric Strength | Vdis | Terminals to case, AC 1 minute | 2 | kV |
| Mounting Torque | TOR | (Recommended torque : 0.5N·m) | 0.8 | N·m |

Electrical Characteristics (If not specified Tc=25)

| Item | Symbol | Conditions | Ratings | Unit |
|--------------------|----------------|--|----------|------|
| Forward Voltage | V _F | I _F =3.0A, Pulse measurement, Rating of per diode | Max.1.05 | V |
| Reverse Current | I _R | V _R =V _{RM} , Pulse measurement, Rating of per diode | Max.10 | μA |
| Thermal Resistance | jc | unction to case With heatsink | Max.3.4 | /W |
| | jl | unction to lead Without heatsink | Max.5 | |
| | ja | unction to ambient Without heatsink | Max.26 | |
| | cf | Case to heat-sink TOR=0.49N·m | Max.2 | |


U6SBAx

Forward Voltage

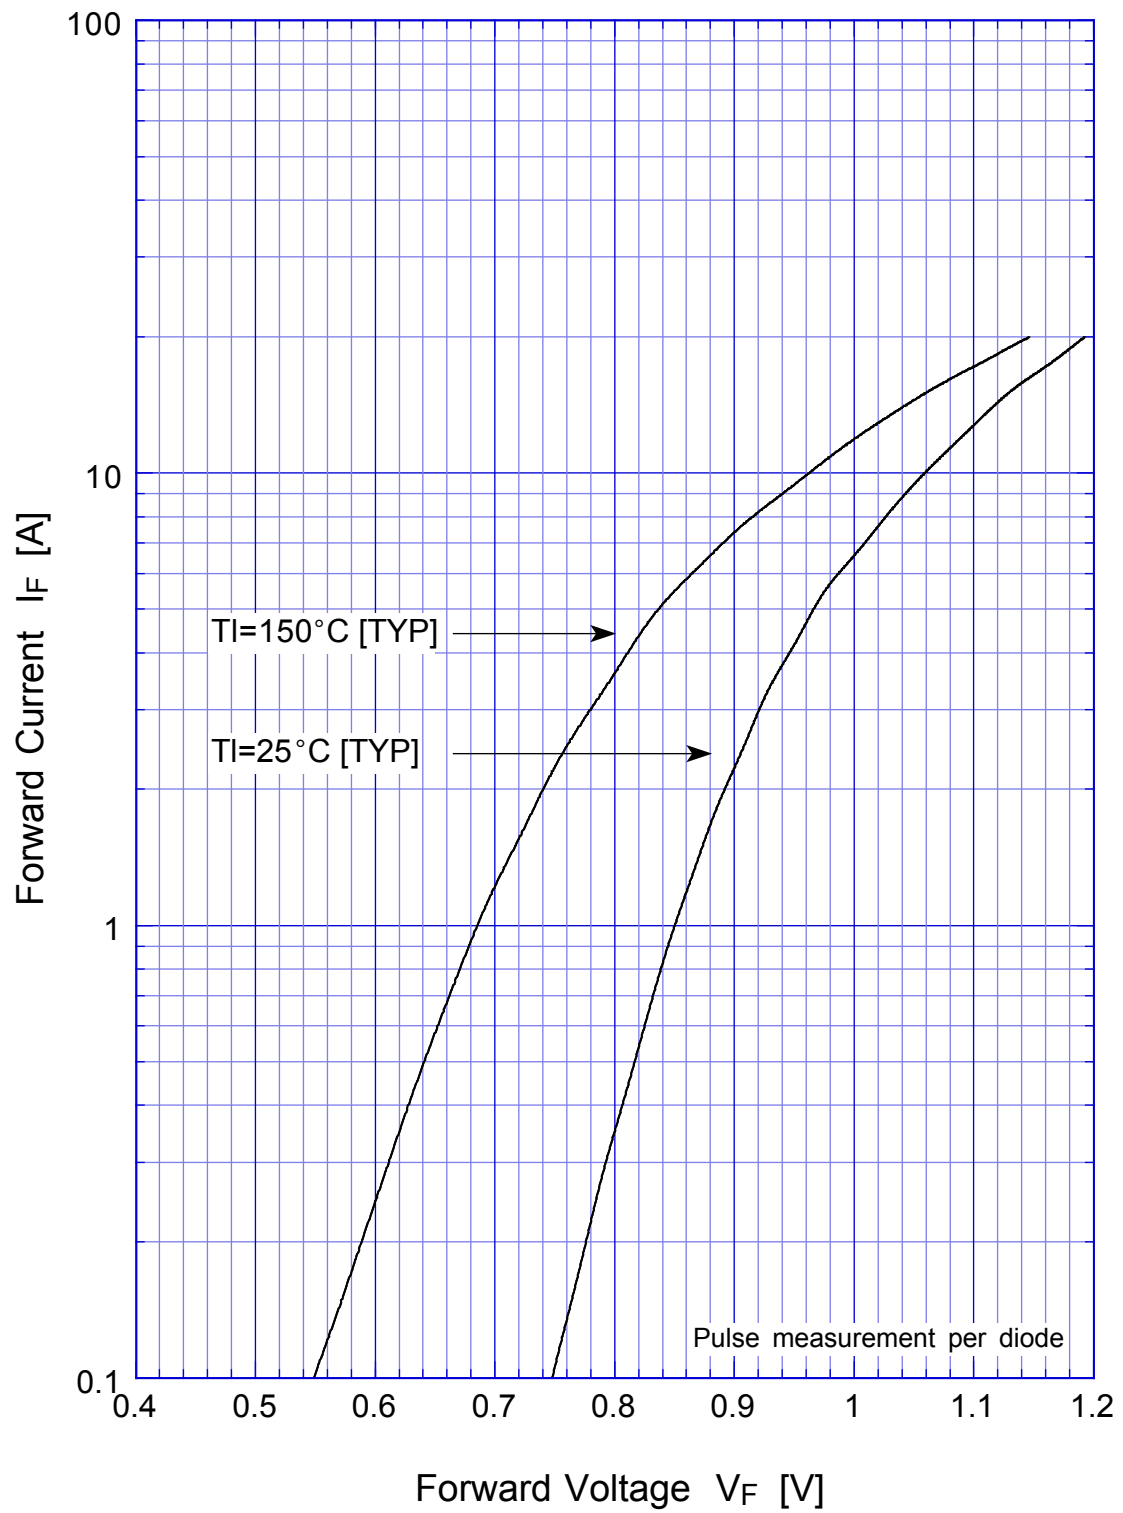

U6SBAx


Forward Power Dissipation

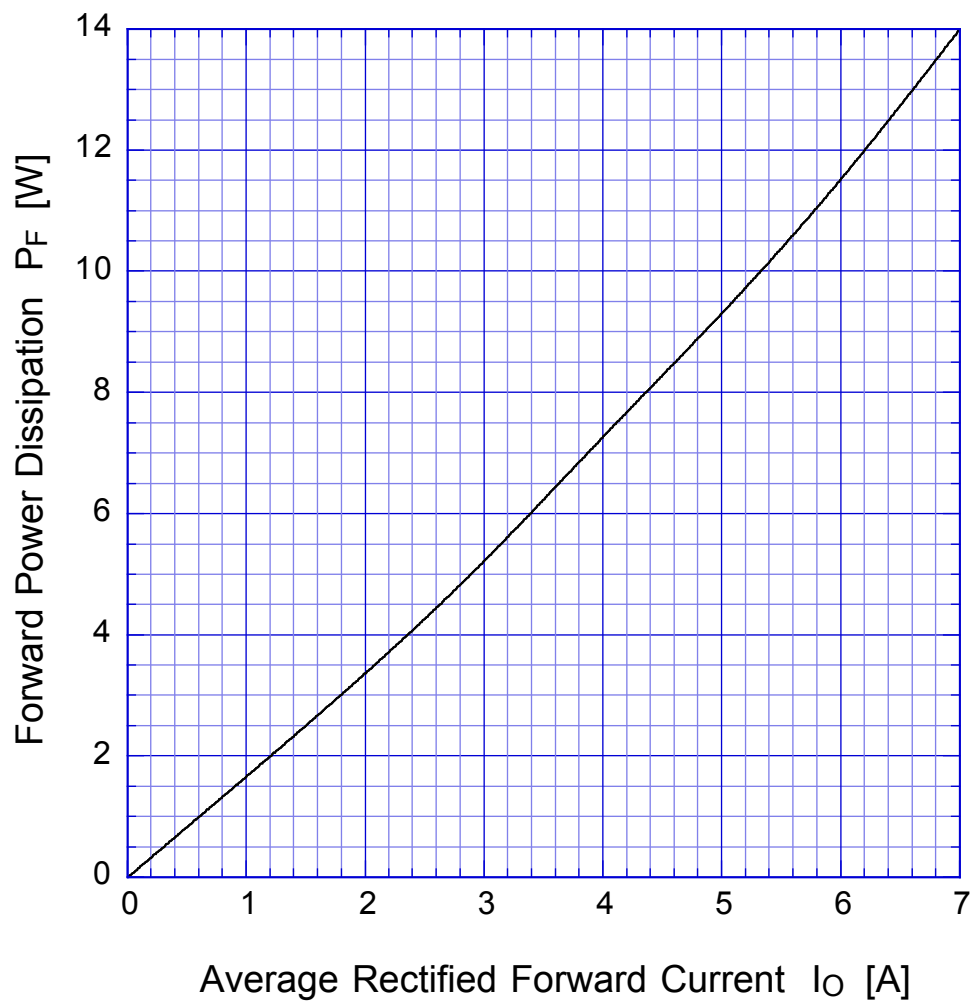

$T_j = 150^\circ\text{C}$
Sine wave

U6SBAx


Derating Curve

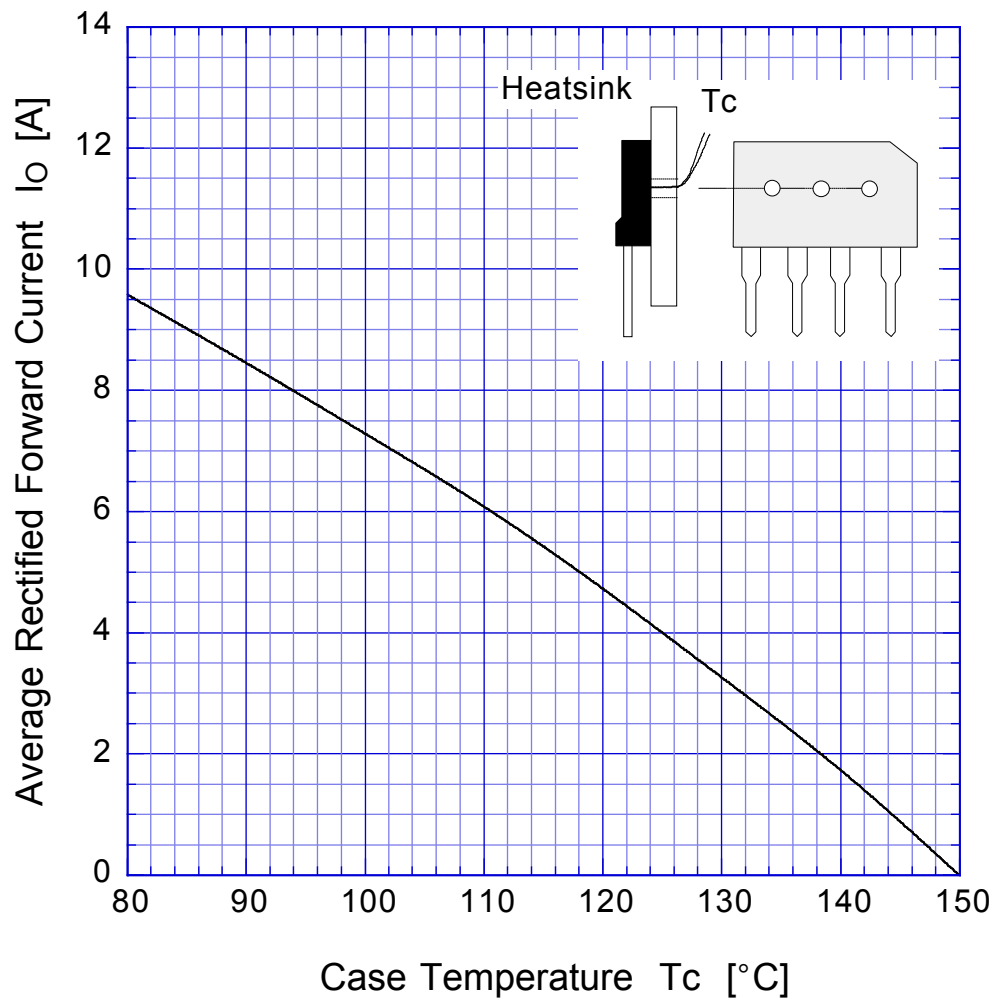

Sine wave
R-load
with heatsink

U6SBAx

Derating Curve

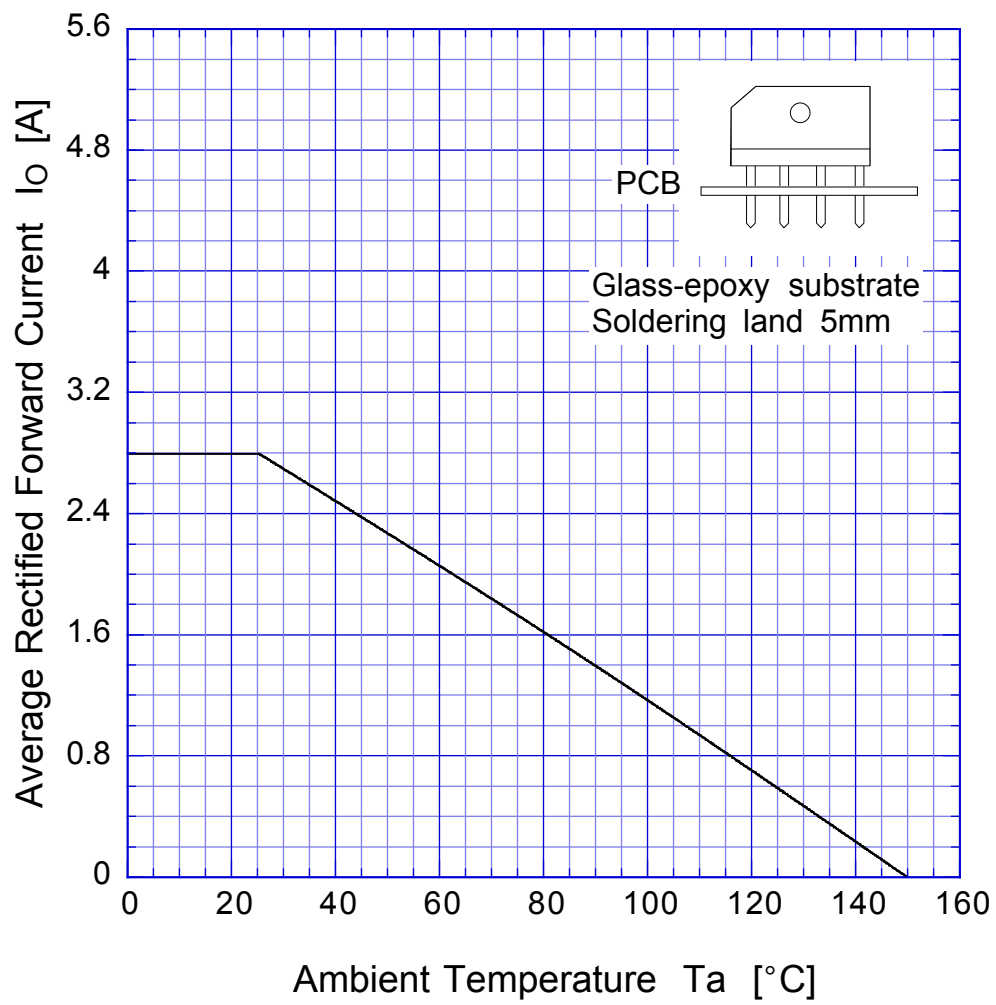

Sine wave
R-load
Free in air

