


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

SC Chip type, For Surface Mounting Series


- Chip type with 5.5mm height
- Designed for surface mounting on high density PC board
- Applicable to automatic insertion machine using carrier tape

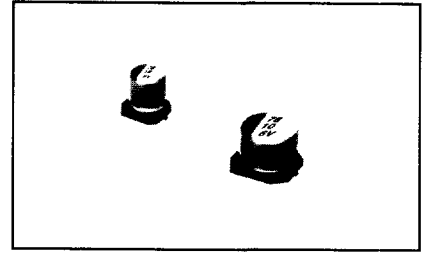

Item	Characteristics																								
Operating temperature range	-40 ~ +85°C																								
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)																								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C																								
Dissipation factor max. (at 120Hz, 20°C)	<table border="1"> <tr> <td>WV</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>$\tan\delta$</td> <td>0.35</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> <td>0.09</td> </tr> </table>	WV	4	6.3	10	16	25	35	50	$\tan\delta$	0.35	0.24	0.20	0.16	0.13	0.12	0.09								
WV	4	6.3	10	16	25	35	50																		
$\tan\delta$	0.35	0.24	0.20	0.16	0.13	0.12	0.09																		
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>WV</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>6</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>12</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> </tr> </table>	WV	4	6.3	10	16	25	35	50	Z-25°C/Z+20°C	6	4	3	2	2	2	2	Z-40°C/Z+20°C	12	8	6	4	4	4	4
WV	4	6.3	10	16	25	35	50																		
Z-25°C/Z+20°C	6	4	3	2	2	2	2																		
Z-40°C/Z+20°C	12	8	6	4	4	4	4																		
Load life (after application of the rated voltage for 2000 hours at 85°C)	<table border="1"> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance value</td> <td>Within $\pm 20\%$ of initial value</td> </tr> <tr> <td>$\tan\delta$</td> <td>Less than 200% of specified value</td> </tr> </table>	Leakage current	Less than specified value	Capacitance value	Within $\pm 20\%$ of initial value	$\tan\delta$	Less than 200% of specified value																		
Leakage current	Less than specified value																								
Capacitance value	Within $\pm 20\%$ of initial value																								
$\tan\delta$	Less than 200% of specified value																								
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 30 seconds.																								
Resistance to soldering heat	<table border="1"> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance value</td> <td>Within $\pm 10\%$ of initial value</td> </tr> <tr> <td>$\tan\delta$</td> <td>Less than specified value</td> </tr> </table>	Leakage current	Less than specified value	Capacitance value	Within $\pm 10\%$ of initial value	$\tan\delta$	Less than specified value																		
Leakage current	Less than specified value																								
Capacitance value	Within $\pm 10\%$ of initial value																								
$\tan\delta$	Less than specified value																								

● DRAWING

Unit : mm

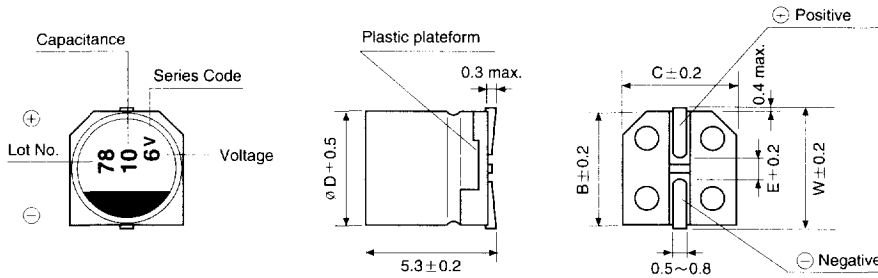

ϕD	W	B	C	E
4	5.0	4.3	4.3	1.0
5	6.0	5.3	5.3	1.4
6.3	7.3	6.6	6.6	2.2

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	4	6.3	10	16	25	35	50
0.1								4 3.2
0.22								4 4.7
0.33								4 5.7
0.47								4 6.8
1.0								4 10.0
2.2								4 14.8
3.3								4 18.1
4.7						4 18	4 19	5 25.0
10					4 24	5 30	5 32	6.3 42.6
22			4 29	5 36	5 41	6.3 53	6.3 55	
33	4 29	5 41	5 44	6.3 58	6.3 64			
47	4 35	5 48	6.3 62	6.3 69				
100	6.3 68	6.3 82						
150	6.3 84							

Ripple current (mA rms) at 85°C, 120Hz
Case size ϕD (mm)