

L1904C/CS DIN STYLE CONNECTOR PANEL MOUNTING SOCKET




MATERIALS

BODY:	Zinc alloy, nickel-plated
CLAMPING NUT:	Noryl
RECEPTACLE INSULATOR:	Glass filled nylon
CONTACTS:	Brass, silver plated
CONTACT TERMINATION:	Solder lugs, maximum conductor diameter – 0.9mm or 16/0.2mm

ORDERING REFERENCE:
DIRECT PCB MOUNTING L1904C*/CS

*number of poles

Note: Only available in 5, 6, 7 and 8 way configuration

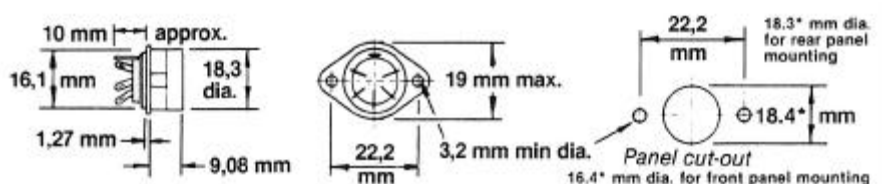

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet