

<b>2A01 THRU 2A07</b>	
<b>2.0 AMPS. Silicon Rectifiers</b>	
<b>Features</b> <ul style="list-style-type: none"> <li>• Low forward voltage drop</li> <li>• High current capability</li> <li>• High reliability</li> <li>• High surge current capability</li> </ul>	Voltage Range 50 to 1000 Volts Current 2.0Amperes <b>DO-15</b>
<b>Mechanical Data</b> <ul style="list-style-type: none"> <li>• Cases: Molded plastic</li> <li>• Epoxy: UL 94V-O rate flame retardant</li> <li>• Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed</li> <li>• Polarity: Color band denotes cathode end</li> <li>• High temperature soldering guaranteed: 250°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension</li> <li>• Weight: 0.40 gram</li> </ul>	<p style="text-align: center;"><b>Dimensions in inches and (millimeters)</b></p>

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Symbols	2A01	2A02	2A03	2A04	2A05	2A06	2A07	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ T <sub>A</sub> = 75°C	2.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	60							A
Maximum Instantaneous Forward Voltage @ 2.0A	1.0							V
Maximum DC Reverse Current @ T <sub>A</sub> =25°C at Rated DC Blocking Voltage @ T <sub>A</sub> =100°C	5.0							uA
	50							uA
Maximum Full Load Reverse Current, Full Cycle Average .375"(9.5mm) Lead Length @ T <sub>A</sub> =75°C	30							uA
Typical Junction Capacitance ( Note 1 )	30							pF
Typical Thermal Resistance R <sub>θJA</sub> ( Note 2 )	50							°C/W
Operating Temperature Range T <sub>J</sub>	-65 to +125							°C
Storage Temperature Range T <sub>STG</sub>	-65 to +150							°C

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

2. Thermal Resistance from Junction to Ambient .375" (9.5mm) Lead Length.

## RATINGS AND CHARACTERISTIC CURVES (2A01 THRU 2A07)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

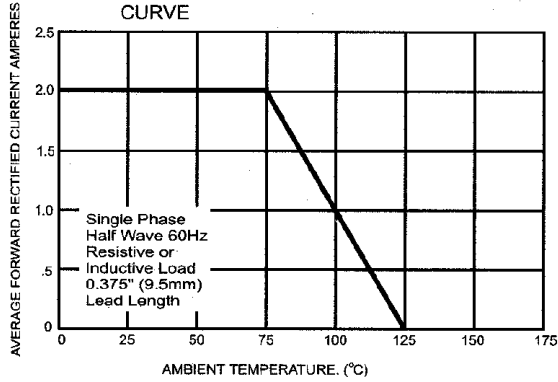


FIG. 2- TYPICAL FORWARD CHARACTERISTICS

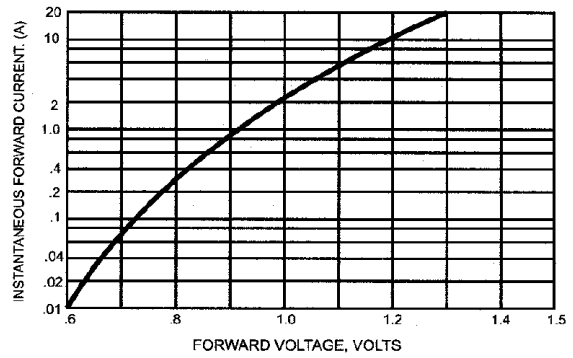


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

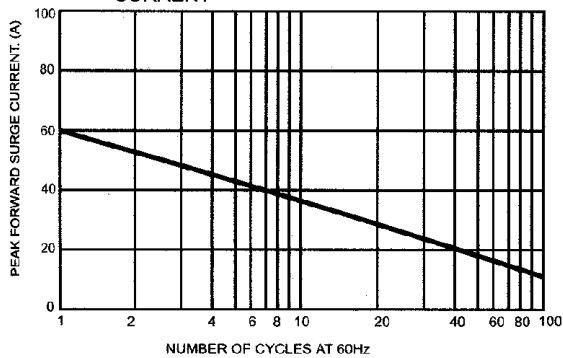


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

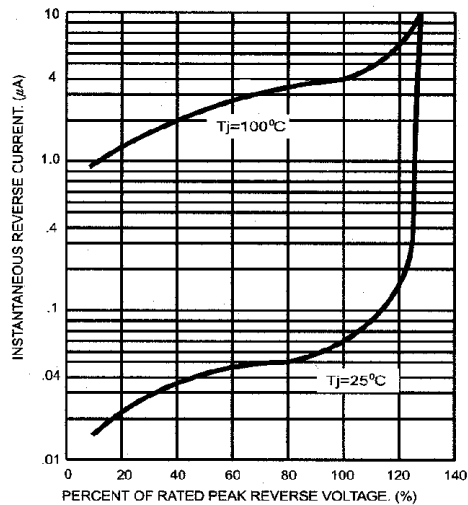


FIG. 5- TYPICAL JUNCTION CAPACITANCE

