


2mm × 2mm Pin Strip Header

Surface Mount, Location Clips

1512 Series

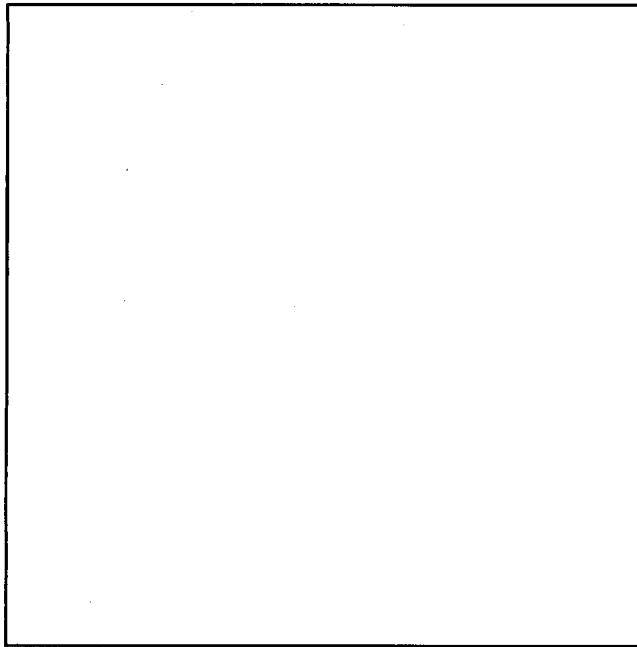

- Industry standard compatible
- High temperature dielectric
- IR, vapor & wave solder compatible
- Unique lengths available
- Maximizes use of PC board space
- Mates with boardmount and wiremount products
- End stackable feature
- Side stackable feature
- Surface Mount
- Metal clips for board retention

TS-0567-03
Sheet 1 of 2

66

Physical

Insulation

Material: High Temperature Plastic (PCT)
Flammability: UL 94V-0
Color: Black

Contact

Material: Copper Alloy
Plating
Underplate: 100 μ" [2.54 μm] Nickel — QQ-N-290, Class 2
Wiping Area: Gold — MIL-G-45204, Type II, Grade C
Solder/Tails: 200 μ" [5.08 μm] 90/10 Tin Lead — MIL-P-81728

Note: The location and thickness of the contact plating is determined by the part number. Refer to ordering information.

Electrical

Current Rating: 1.5 A
Insulation Resistance: $> 5 \times 10^9 \Omega$ at 250 Vdc
Withstanding Voltage: 500 Vdc at Sea Level

Environmental

Temperature Rating: -55°C to +105°C




UL File No.: E68080

3M Electronic Products Division D 19F ■ 9035312 0004379 900 ■

2mm × 2mm Pin Strip Header


Surface Mount, Location Clips

1512 Series

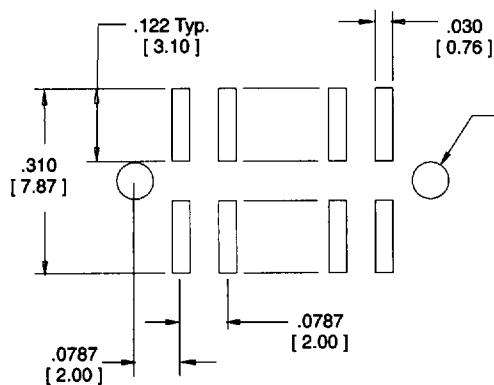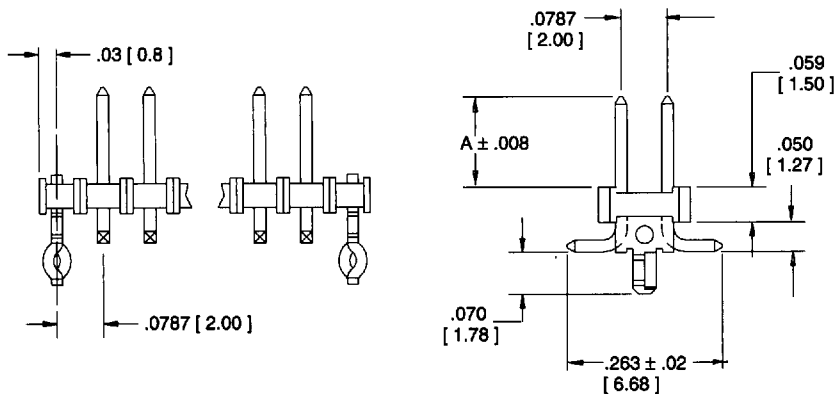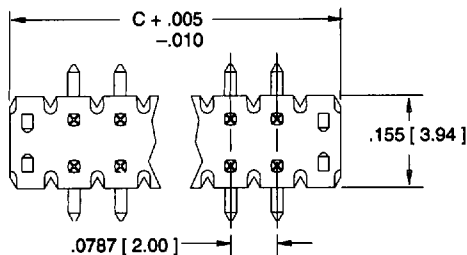

Recommended Solder Pad Layout

∅.062 ± .002 [1.57]
Location Post

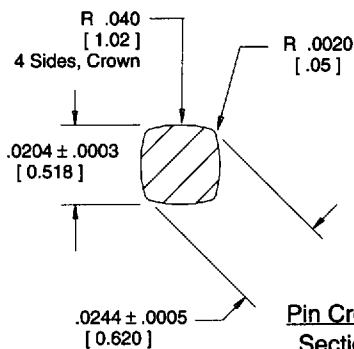

Pin Cross Section

Pin Qty Code	Dimension C
04	.315 [8.00]
06	.394 [10.00]
08	.472 [12.00]
10	.551 [14.00]
12	.630 [16.00]
14	.709 [18.00]
16	.787 [20.0]
18	.866 [22.00]
20	.945 [24.00]
22	1.024 [26.00]
24	1.102 [28.00]
26	1.181 [30.00]
28	1.260 [32.00]
30	1.339 [34.00]
32	1.417 [36.00]
34	1.496 [38.00]
36	1.575 [40.0]
38	1.654 [42.0]
40	1.732 [44.00]
42	1.811 [46.00]
44	1.890 [48.00]
46	1.969 [50.00]
48	2.047 [52.00]
50	2.126 [54.00]
52	2.205 [56.00]
54	2.283 [58.00]
56	2.362 [60.00]
58	2.441 [62.00]
60	2.500 [64.00]

Inch [mm]

Tolerance Unless Noted			
	.0	.00	.000
Inch	± .1	± .01	± .005

[] Dimensions for Reference only

Ordering Information

X1512XX-2X90-XX

Packaging:
W = Tape & Reel
(See TS-0607)
Blank = Standard

Plating
TB = 30μ" [0.76μm] Gold
TH = 15μ" [0.38μm] Gold

Pin Quantity
(See Table)

Pin Length Dim. A
3 = .130 [3.30]
4 = .152 [3.86]

TS-0567-03
Sheet 2 of 2