



**IDC**

**IDC CABLE SOCKET 1.27mm**

- Industry compatible
- Competitively priced
- Various Plating contacts available
- 1.27mm pitch



**SPECIFICATION**



**Material & Finish**

Terminated with 0.635mm pitch flat ribbon cable

- Contact Material:** Beryllium Copper
- Insulator Material:** PBT, glass reinforced, rated UL 94V-0
- Current Rating:** 0.5 Amp
- Contact Resistance:** 30M Ω Max.
- Insulator Resistance:** 1000M Ω Min.
- Dielectric Withstanding Voltage:** 250V AC for One Minute
- Operating Temperature:** -40°C to + 105°C

Position	A	B
10	10.5	5.08
12	11.8	6.35
14	13.1	7.62
16	14.3	8.89
20	16.9	11.43
22	18.1	12.70
26	20.7	17.78
30	23.3	20.32
34	25.8	26.09
40	29.6	29.90
44	32.1	32.44
50	35.9	36.25

**OUTLINE DRAWING**

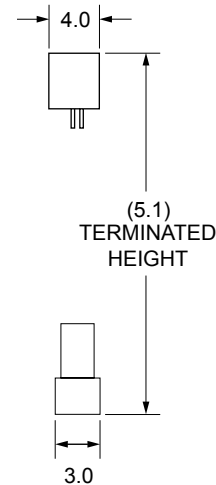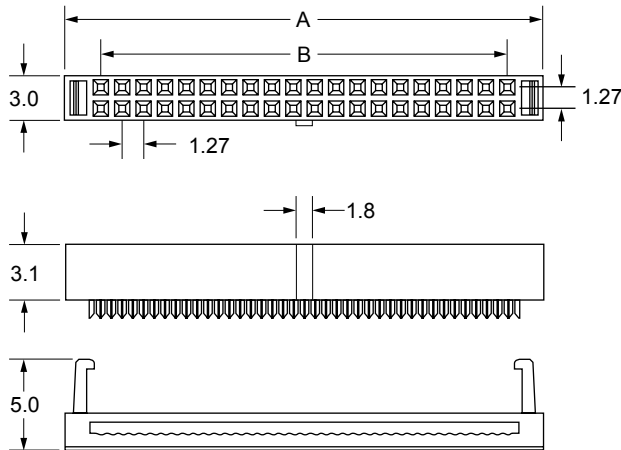

SECTION 15

**ORDERING INFORMATION**

DBC	IDC	A32	30	C	G	B	1
Dubilier Connectors	IDC Connector	Series	N° of Ways	Contact Material	Contact Plating	Features	Colour
			10=10way 12=12way 14=14way 16=16way 20=20way 22=22way	C=Beryllium Copper	G= Gold Flash S=Selective *=Other Plating available	B=Without Strain Relief	1=Black
			26=26way 30=30way 34=34way 40=40way 44=44way 50=50way				