

# AX78LXXAM/BM

# AX78LXXAA/BA

3-Terminal Positive Voltage Regulators

## Description

These regulators employ internal current-limiting and thermal-shutdown, making them essentially indestructible. They can deliver up to 100mA output current.

## Features


- Maximum Output Current of 100mA ( $T_C=25^\circ\text{C}$ )
- Internal Short-Circuit Current Limiting
- Internal Thermal Overload Protection
- TO-92 & SOT-89 Package

## Absolute Maximum Ratings


( $T_A=25^\circ\text{C}$ , Unless Otherwise Specified)

Characteristic	Symbol	Rating	Unit
Input Voltage	$V_{IN}$	40	V
Power Dissipation	$P_D$	TO-92	700
		SOT-89	500
Operating Temperature	$T_{opr}$	-30 to 85	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-55 to 150	$^\circ\text{C}$
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Thermal Resistance	$R_{th(f-a)}$	208	$^\circ\text{C/W}$

### AX78LXX Series Pin Assignment




3-Lead Plastic **SOT-89**  
 Package Code: M  
 Pin 1:  $V_{OUT}$   
 Pin 2: GND  
 Pin 3:  $V_{IN}$



3-Lead Plastic **TO-92**  
 Package Code: A  
 Pin 1:  $V_{OUT}$   
 Pin 2: GND  
 Pin 3:  $V_{IN}$

### Typical Application

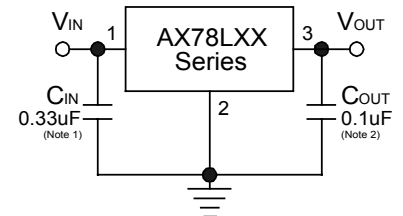


Note 1:  $C_{IN}$  is required if regulator is located an appreciable distance from power supply filter.


Note 2:  $C_{OUT}$  is not needed for stability; however, it does improve transient response. Values of less than 0.1uF could cause instability.

## Schematic Diagram & Equivalent Circuit

### Schematic Diagram

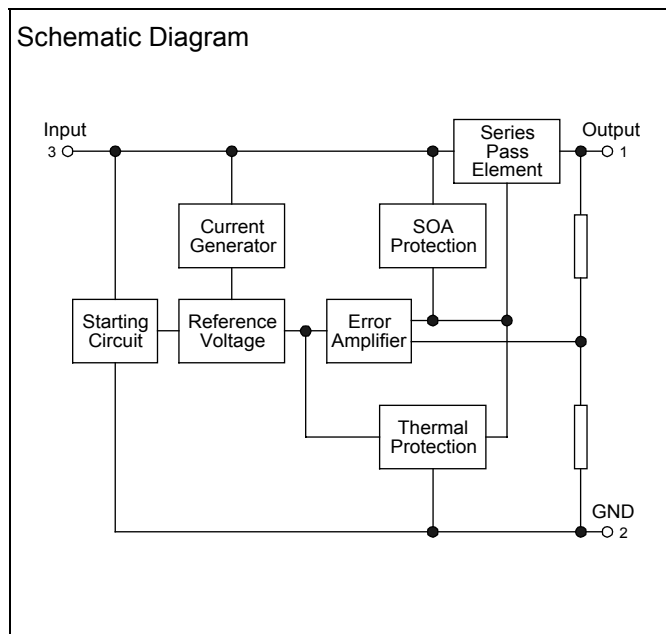

### Equivalent Circuit

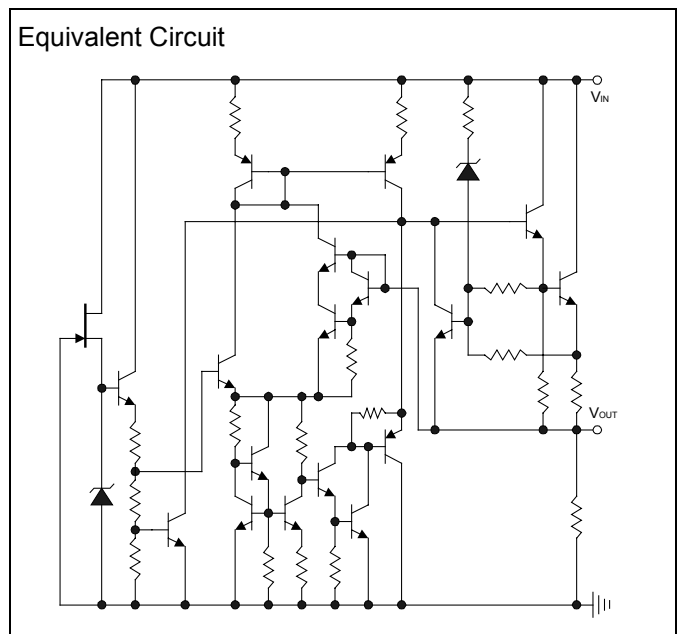

## AX78L05XX Electrical Characteristics

$V_{IN}=10V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0^{\circ}C \leq T_J \leq 125^{\circ}C$  (unless otherwise specified)

Symbol	Parameter	Conditions	AX78L05AM/AA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	4.85	5	5.15	V
		$1mA \leq I_{OUT} \leq 70mA$	4.85	5	5.15	
		$7V \leq V_{IN} \leq 20V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $7V \leq V_{IN} \leq 20V$	-	15	150	mV
		$T_J=25^{\circ}C$ , $8V \leq V_{IN} \leq 20V$	-	15	100	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	11	60	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	5	30	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$8V \leq V_{IN} \leq 20V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	40	-	$\mu V_{rms}$
RR	Ripple Rejection	$8V \leq V_{IN} \leq 18V$ , $f=120Hz$ , $T_J=25^{\circ}C$	41	49	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$V_{IN}=10V$ , $T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	0.6	$mV/^{\circ}C$

Symbol	Parameter	Conditions	AX78L05BM/BA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	4.75	5	5.25	V
		$1mA \leq I_{OUT} \leq 70mA$	4.75	5	5.25	
		$7V \leq V_{IN} \leq 20V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $7V \leq V_{IN} \leq 20V$	-	15	150	mV
		$T_J=25^{\circ}C$ , $8V \leq V_{IN} \leq 20V$	-	15	100	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	11	60	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	5	30	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$8V \leq V_{IN} \leq 20V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	40	-	$\mu V_{rms}$
RR	Ripple Rejection	$8V \leq V_{IN} \leq 18V$ , $f=120Hz$ , $T_J=25^{\circ}C$	41	49	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$V_{IN}=10V$ , $T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	0.6	$mV/^{\circ}C$

## AX78L06XX Electrical Characteristics

$V_{IN}=11V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0^{\circ}C \leq T_J \leq 125^{\circ}C$  (unless otherwise specified)

Symbol	Parameter	Conditions	AX78L06AM/AA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	5.82	6	6.18	V
		$1mA \leq I_{OUT} \leq 70mA$	5.82	6	6.18	
		$8V \leq V_{IN} \leq 22V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $8V \leq V_{IN} \leq 22V$	-	15	155	mV
		$T_J=25^{\circ}C$ , $9V \leq V_{IN} \leq 12V$	-	20	105	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	15	70	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	5	35	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$9V \leq V_{IN} \leq 22V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	50	-	$\mu V_{rms}$
RR	Ripple Rejection	$9V \leq V_{IN} \leq 19V$ , $f=120Hz$ , $T_J=25^{\circ}C$	39	47	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$V_{IN}=10V$ , $T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	0.7	$mV/^{\circ}C$

Symbol	Parameter	Conditions	AX78L06BM/BA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	5.7	6	6.3	V
		$1mA \leq I_{OUT} \leq 70mA$	5.7	6	6.3	
		$8V \leq V_{IN} \leq 22V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $8V \leq V_{IN} \leq 22V$	-	15	155	mV
		$T_J=25^{\circ}C$ , $9V \leq V_{IN} \leq 12V$	-	20	105	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	15	70	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	5	35	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$9V \leq V_{IN} \leq 22V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	50	-	$\mu V_{rms}$
RR	Ripple Rejection	$9V \leq V_{IN} \leq 19V$ , $f=120Hz$ , $T_J=25^{\circ}C$	39	47	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$V_{IN}=10V$ , $T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	0.7	$mV/^{\circ}C$

## AX78L08XX Electrical Characteristics

$V_{IN}=14V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0^{\circ}C \leq T_J \leq 125^{\circ}C$  (unless otherwise specified)

Symbol	Parameter	Conditions	AX78L08AM/AA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	7.76	8	8.24	V
		$1mA \leq I_{OUT} \leq 70mA$	7.76	8	8.24	
		$10.5V \leq V_{IN} \leq 23V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $10.5V \leq V_{IN} \leq 23V$	-	20	175	mV
		$T_J=25^{\circ}C$ , $11V \leq V_{IN} \leq 23V$	-	20	125	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	15	80	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	7	40	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$11V \leq V_{IN} \leq 23V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	60	-	$\mu V_{rms}$
RR	Ripple Rejection	$12V \leq V_{IN} \leq 23V$ , $f=120Hz$ , $T_J=25^{\circ}C$	37	45	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	0.9	$mV/^{\circ}C$

Symbol	Parameter	Conditions	AX78L08BM/BA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	7.6	8	8.4	V
		$1mA \leq I_{OUT} \leq 70mA$	7.6	8	8.4	
		$10.5V \leq V_{IN} \leq 23V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $10.5V \leq V_{IN} \leq 23V$	-	20	175	mV
		$T_J=25^{\circ}C$ , $11V \leq V_{IN} \leq 23V$	-	20	125	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	15	80	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	7	40	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$11V \leq V_{IN} \leq 23V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	60	-	$\mu V_{rms}$
RR	Ripple Rejection	$12V \leq V_{IN} \leq 23V$ , $f=120Hz$ , $T_J=25^{\circ}C$	37	45	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	0.9	$mV/^{\circ}C$

## AX78L09XX Electrical Characteristics

$V_{IN}=15V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0^{\circ}C \leq T_J \leq 125^{\circ}C$  (unless otherwise specified)

Symbol	Parameter	Conditions	AX78L09AM/AA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	8.73	9	9.27	V
		$1mA \leq I_{OUT} \leq 70mA$	8.73	9	9.27	
		$11.4V \leq V_{IN} \leq 24V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $11.4V \leq V_{IN} \leq 24V$	-	80	200	mV
		$T_J=25^{\circ}C$ , $12V \leq V_{IN} \leq 24V$	-	20	160	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	17	90	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	8	45	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$12V \leq V_{IN} \leq 24V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	65	-	$\mu V_{rms}$
RR	Ripple Rejection	$12V \leq V_{IN} \leq 24V$ , $f=120Hz$ , $T_J=25^{\circ}C$	36	44	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	1	$mV/^{\circ}C$

Symbol	Parameter	Conditions	AX78L09BM/BA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	8.55	9	9.45	V
		$1mA \leq I_{OUT} \leq 70mA$	8.55	9	9.45	
		$11.4V \leq V_{IN} \leq 24V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $11.4V \leq V_{IN} \leq 24V$	-	80	200	mV
		$T_J=25^{\circ}C$ , $12V \leq V_{IN} \leq 24V$	-	20	160	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	17	90	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	8	45	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$12V \leq V_{IN} \leq 24V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	65	-	$\mu V_{rms}$
RR	Ripple Rejection	$12V \leq V_{IN} \leq 24V$ , $f=120Hz$ , $T_J=25^{\circ}C$	36	44	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	1	$mV/^{\circ}C$


## AX78L12XX Electrical Characteristics

$V_{IN}=19V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0^{\circ}C \leq T_J \leq 125^{\circ}C$  (unless otherwise specified)





Symbol	Parameter	Conditions	AX78L12AM/AA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	11.64	12	12.36	V
		$1mA \leq I_{OUT} \leq 70mA$	11.64	12	12.36	
		$14.5V \leq V_{IN} \leq 27V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $14.5V \leq V_{IN} \leq 27V$	-	120	250	mV
		$T_J=25^{\circ}C$ , $16V \leq V_{IN} \leq 27V$	-	100	200	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	20	100	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	10	50	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$16V \leq V_{IN} \leq 27V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	80	-	$\mu V_{rms}$
RR	Ripple Rejection	$15V \leq V_{IN} \leq 25V$ , $f=120Hz$ , $T_J=25^{\circ}C$	36	41	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	1.4	$mV/^{\circ}C$

Symbol	Parameter	Conditions	AX78L12BM/BA			Units
			Min	Typ	Max	
$V_O$	Output Voltage	$T_J=25^{\circ}C$	11.4	12	12.6	V
		$1mA \leq I_{OUT} \leq 70mA$	11.4	12	12.6	
		$14.5V \leq V_{IN} \leq 27V$ , $1mA \leq I_{OUT} \leq 40mA$				
$Reg_{line}$	Line Regulation	$T_J=25^{\circ}C$ , $14.5V \leq V_{IN} \leq 27V$	-	120	250	mV
		$T_J=25^{\circ}C$ , $16V \leq V_{IN} \leq 27V$	-	100	200	
$Reg_{load}$	Load Regulation	$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 100mA$	-	20	100	mV
		$T_J=25^{\circ}C$ , $1mA \leq I_{OUT} \leq 40mA$	-	10	50	
$I_B$	Quiescent Current	$I_{OUT}=5mA$ , $T_J=25^{\circ}C$	-	3.9	6	mA
$\Delta I_B$	Quiescent Current Change	$16V \leq V_{IN} \leq 27V$ , $T_J=25^{\circ}C$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$ , $T_J=25^{\circ}C$	-	-	0.1	
$V_N$	Output Noise Voltage	$10Hz \leq f \leq 100KHz$ , $T_J=25^{\circ}C$	-	80	-	$\mu V_{rms}$
RR	Ripple Rejection	$15V \leq V_{IN} \leq 25V$ , $f=120Hz$ , $T_J=25^{\circ}C$	36	41	-	dB
$V_D$	Dropout Voltage	$T_J=25^{\circ}C$ , $I_{OUT}=100mA$	-	1.7	2.5	V
$R_O$	Output Resistance	$f=1KHz$	-	17	-	$m\Omega$
$I_{SC}$	Short Circuit Current	$T_J=25^{\circ}C$	-	1.5	2	A
$T_{CVO}$	Average Temperature Coefficient of Output Voltage	$I_{OUT}=5mA$	-	-	1.4	$mV/^{\circ}C$







## Test Circuits

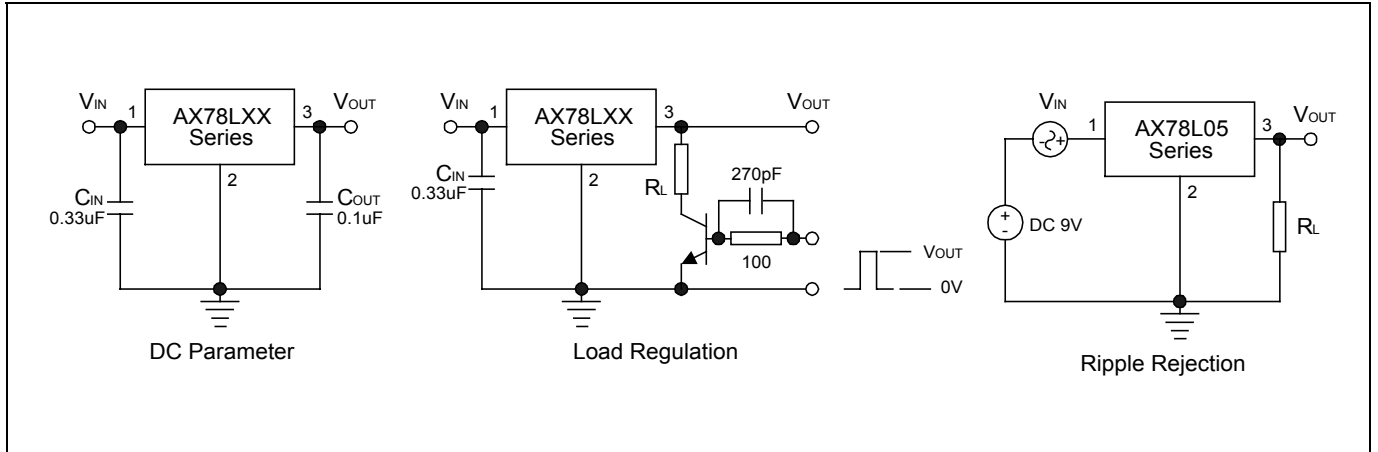

## Application Circuits

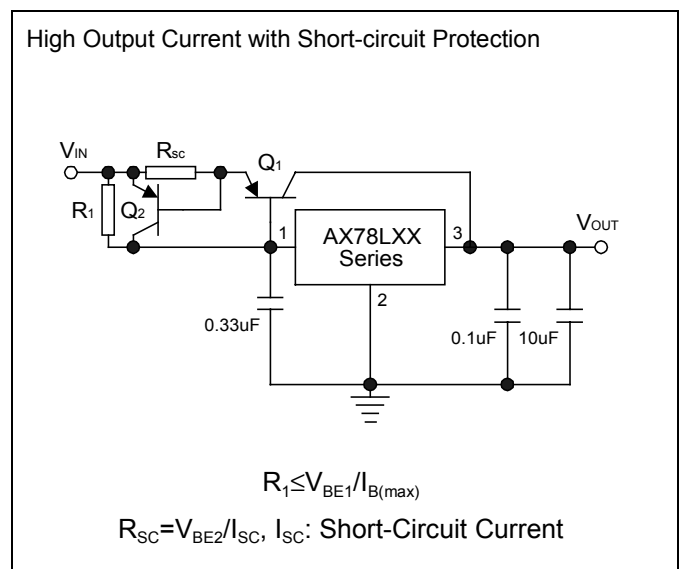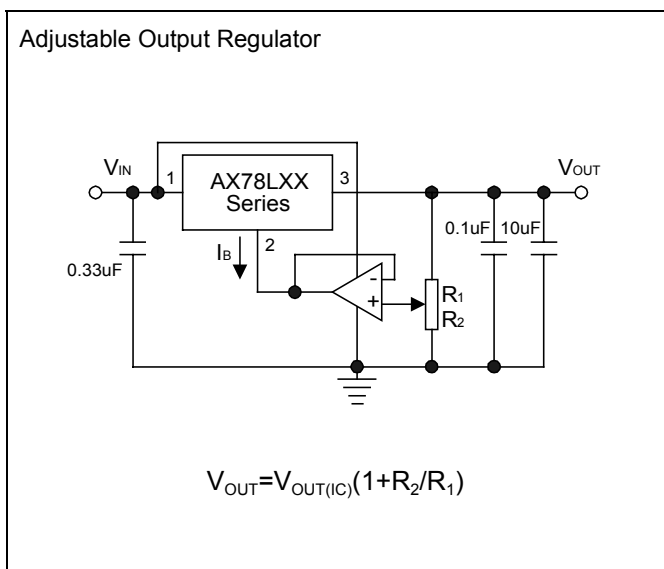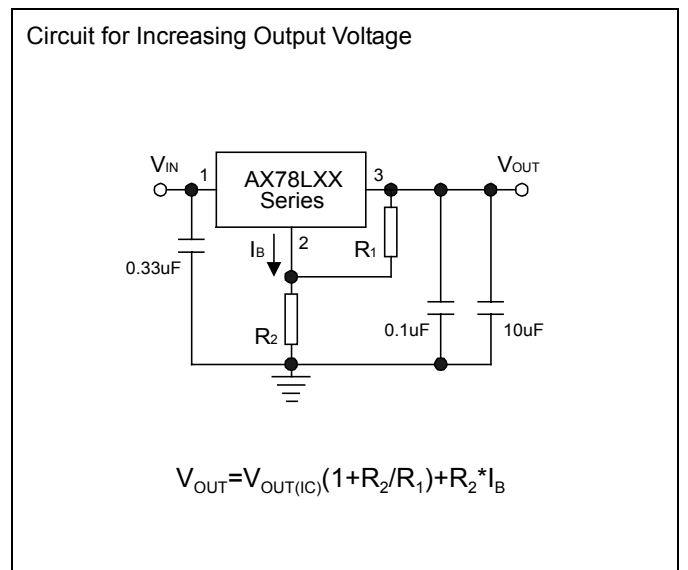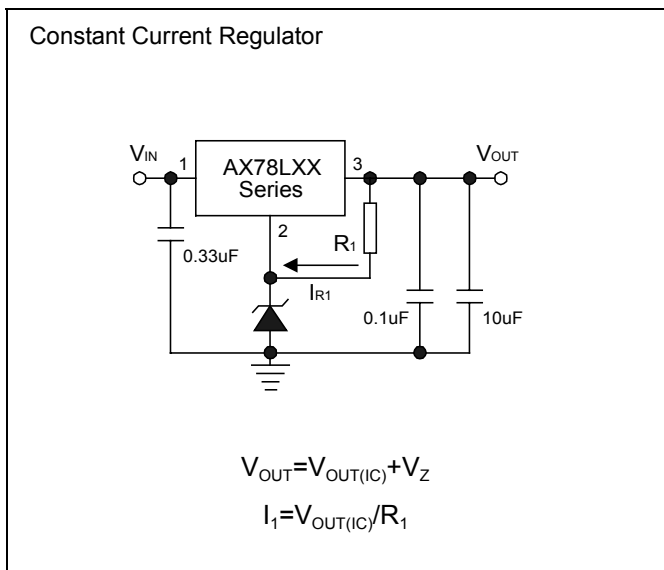


## Characteristics Curve

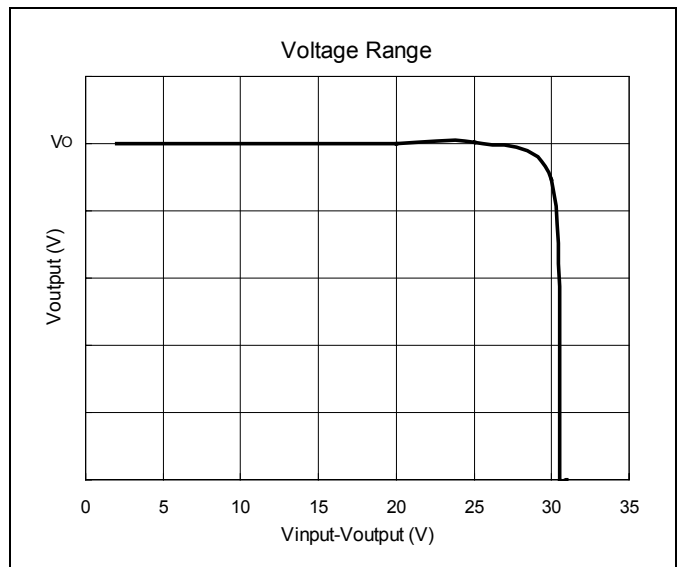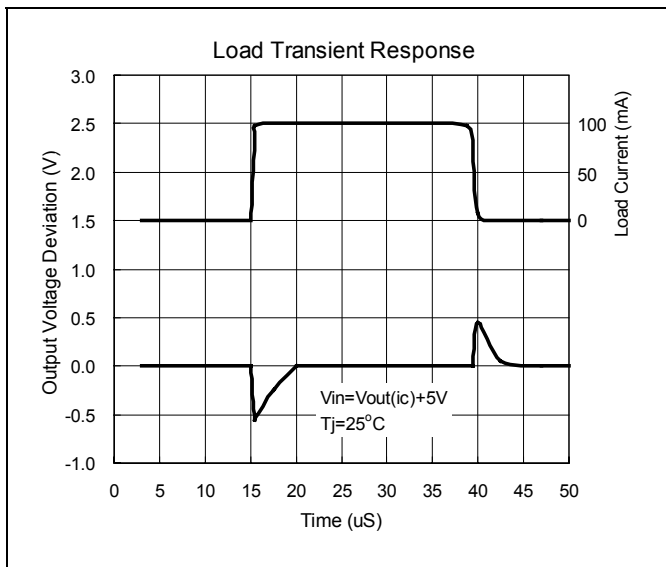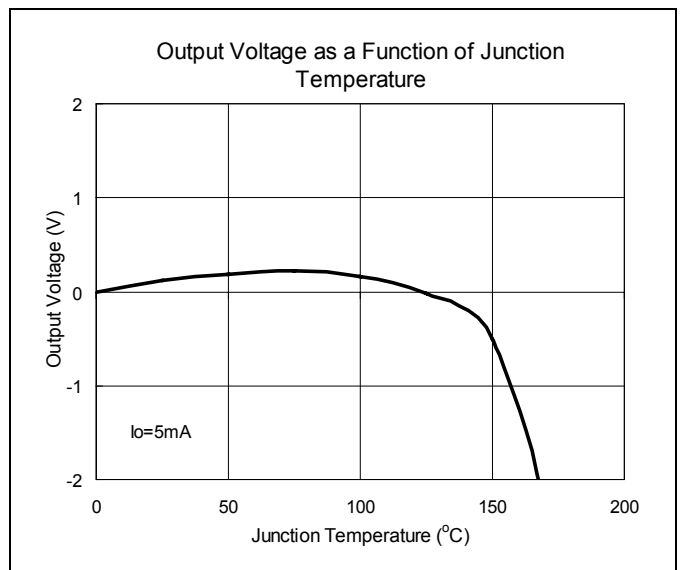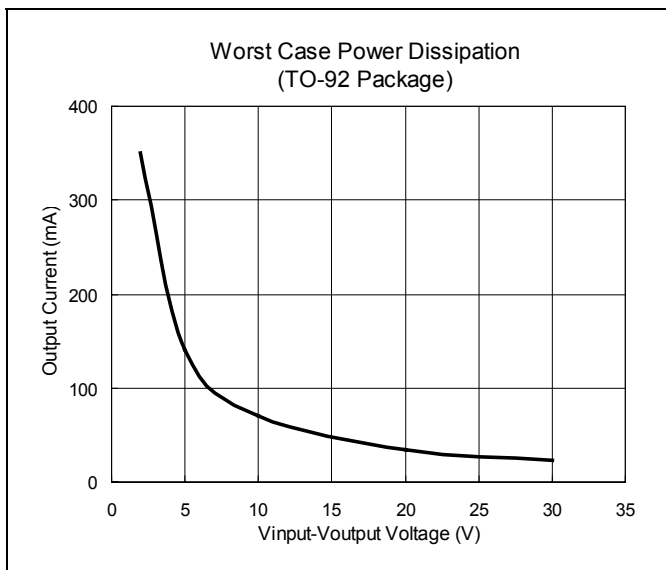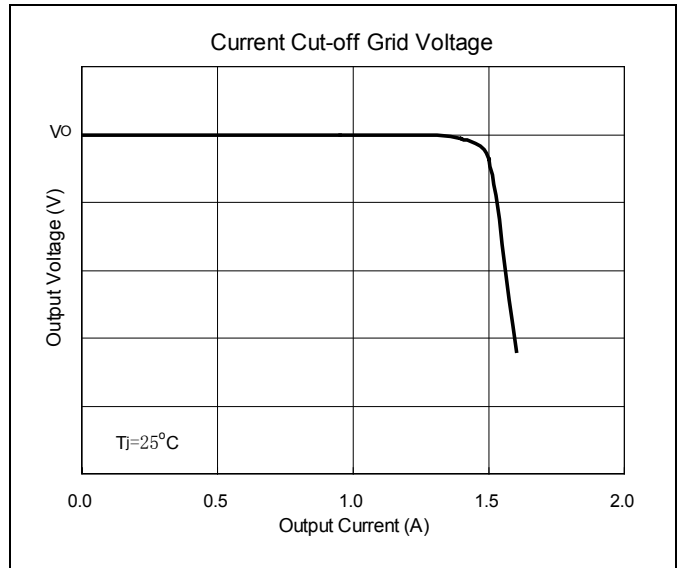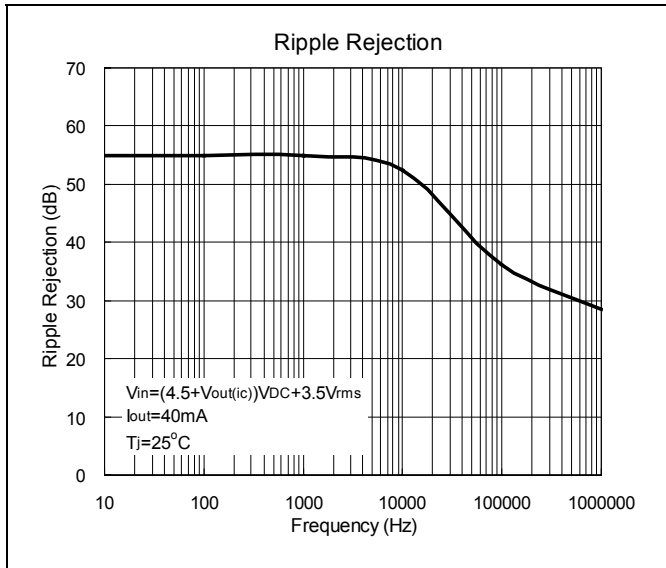



## TO-92 Dimension

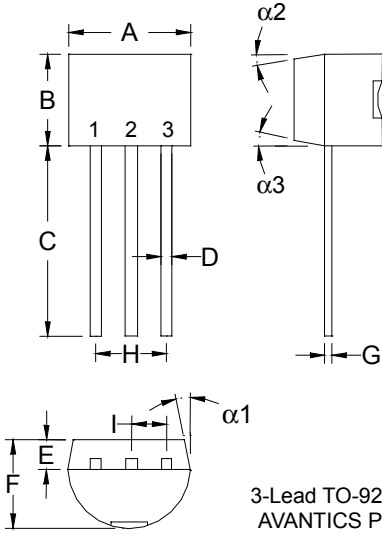

3-Lead TO-92 Plastic Package  
AVANTICS Package Code: A

**Marking:**

Pb Free Mark  
Pb-Free: "●" (Note)  
Normal: None

Product Series (05,06,08,09,12)

Date Code

Control Code

Note: Green label is used for pb-free packing

Pin Style: 1.Output 2.Ground 3.Input


**Material:**

- Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	4.33	4.83
B	4.33	4.83
C	12.70	-
D	0.36	0.56
E	-	*1.27
F	3.36	3.76
G	0.36	0.56
H	-	*2.54
I	-	*1.27
$\alpha 1$	-	*5°
$\alpha 2$	-	*2°
$\alpha 3$	-	*2°

\*: Typical, Unit: mm

## SOT-89 Dimension

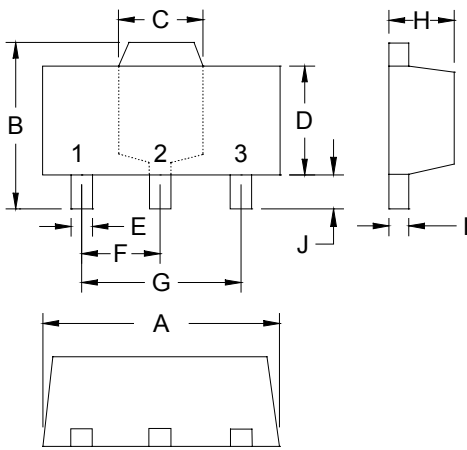

3-Lead SOT-89 Plastic  
Surface Mounted Package  
AVANTICS Package Code: M

**Marking:**

Date Code

Control Code

Pb Free Mark  
Pb-Free: "●" (Note)  
Normal: None

Product Series (05,06,08,09,12)

Note: Green label is used for pb-free packing

Pin Style: 1.Output 2.Ground 3.Input

**Material:**

- Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	4.40	4.60
B	4.05	4.25
C	1.50	1.70
D	2.40	2.60
E	0.36	0.51
F	*1.50	-
G	*3.00	-
H	1.40	1.60
I	0.35	0.41

\*: Typical, Unit: mm

### Important Notice:


- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of AVANTIC.
- AVANTICS reserves the right to make changes to its products without notice.
- **AVANTICS semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- AVANTICS assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

### Head Office:

- AVANTICS Microelectronics Corp: No. 255, Cai Lun Rd. Zhangjiang Technology Industrial Park Pudong, Shanghai, China  
Tel: 86-021-58955599 Fax: 86-021-58558038

## Soldering Methods for AVANTICS's Products

1. Storage environment: Temperature=10°C~35°C Humidity=65%±15%
2. Reflow soldering of surface-mount devices

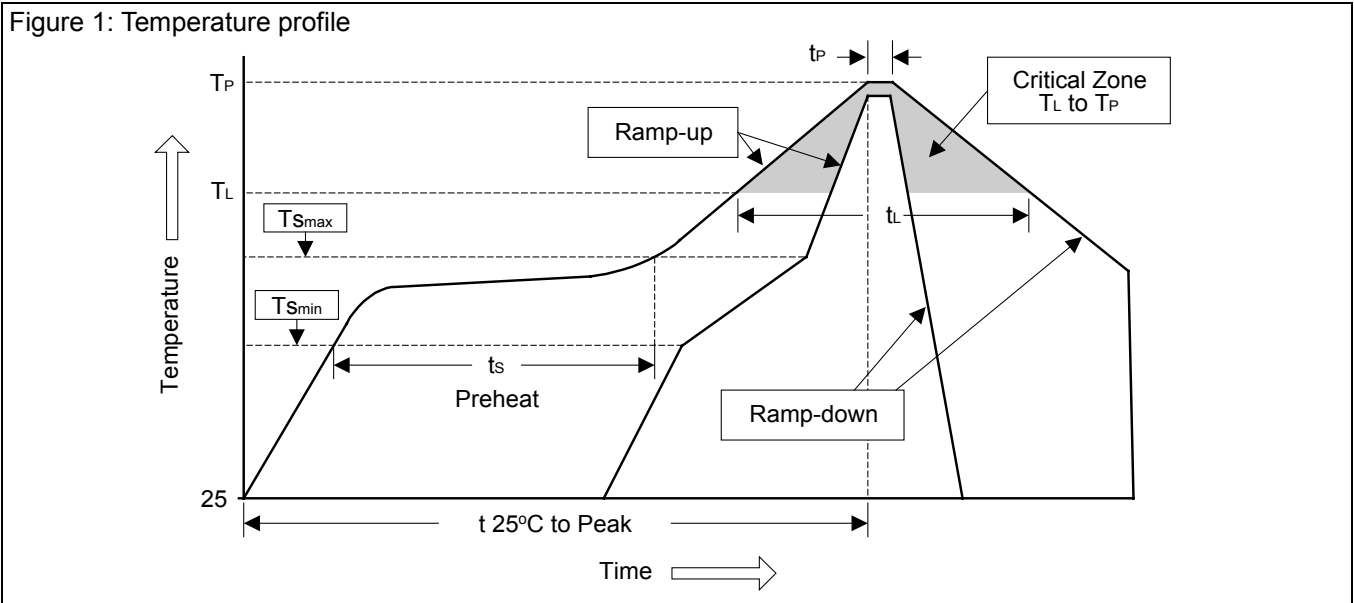

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	<3°C/sec	<3°C/sec
Preheat		
- Temperature Min ( $T_{Smin}$ )	100°C	150°C
- Temperature Max ( $T_{Smax}$ )	150°C	200°C
- Time (min to max) ( $t_s$ )	60~120 sec	60~180 sec
$T_{Smax}$ to $T_L$		
- Ramp-up Rate	<3°C/sec	<3°C/sec
Time maintained above:		
- Temperature ( $T_L$ )	183°C	217°C
- Time ( $t_L$ )	60~150 sec	60~150 sec
Peak Temperature ( $T_P$ )	240°C +0/-5°C	260°C +0/-5°C
Time within 5°C of actual Peak Temperature ( $t_p$ )	10~30 sec	20~40 sec
Ramp-down Rate	<6°C/sec	<6°C/sec
Time 25°C to Peak Temperature	<6 minutes	<8 minutes

### 3. Flow (wave) soldering (solder dipping)

Products	Peak temperature	Dipping time
Pb devices.	245°C ±5°C	5sec ±1sec
Pb-Free devices.	260°C +0/-5°C	5sec ±1sec