




LP49 Crystal Series

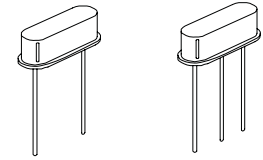

- HC-49/US Low Profile Metal Thru-Hole Crystals
- Available in 3 heights, LP49: 3.5mm (STD), LP24: 2.5mm, LP21: 2.1mm and with 3rd Case Pin: 3LP49

3.000 MHz – 70.000 MHz


Standard Specifications

Calibration Frequency Tolerance at 25 °C	± 30 PPM is standard, tighter tolerances available
Operating Temperature Range (OTR)	0 to +70°C is standard, but can be extended to -40 to +85°C
Frequency Stability (FS) over OTR	± 50 PPM is standard, tighter tolerances available
Drive Level	50 μW is standard, customer may specify
Aging at 25°C	± 5 PPM per year is standard, customer may specify ± 1 PPM
Shunt Capacitance	7 pF maximum
Pullability	

May be specified by customer in terms of frequency shift required over a certain range of load capacitance (e.g. +100 PPM from CL=12 to CL=18 pF) or as motional capacitance (f F)

Part Numbering Guide

Portions of the part number that appear after the frequency may not be marked on part (C of C provided)

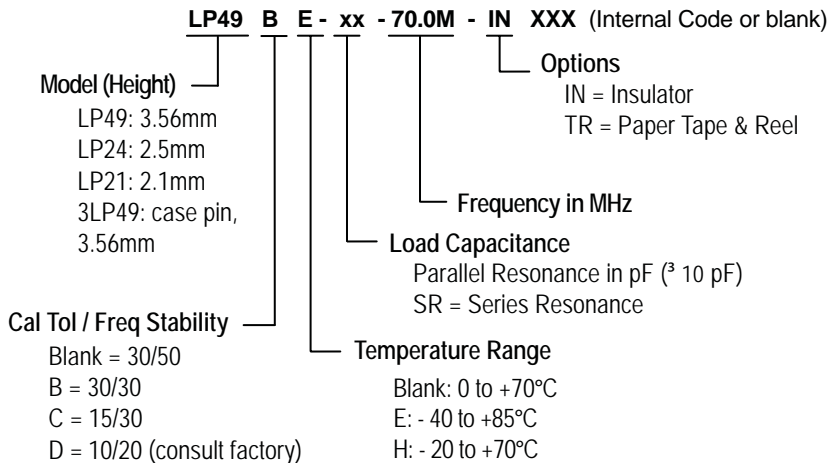

ESR Values

Oscillation Mode	Frequency Range (MHz)	Maximum ESR (Ohms)
Fundamental AT Cut	3.000 – 3.999	200
	4.000 – 4.999	150
	5.000 – 5.999	120
	6.000 – 6.999	100
	7.000 – 7.999	80
	8.000 – 12.999	50
3rd Overtone AT Cut	13.000 – 30.000	40
	25.000 – 70.000	100

Consult factory for lower ESR

Consult factory for available frequencies and specs.


Not all options available for all frequencies. A special part number may be assigned.

Mechanical: inches (mm)

not to scale

3LP49

Due to part size and factory abilities, part marking may vary from lot to lot and may contain our part number or an internal code.

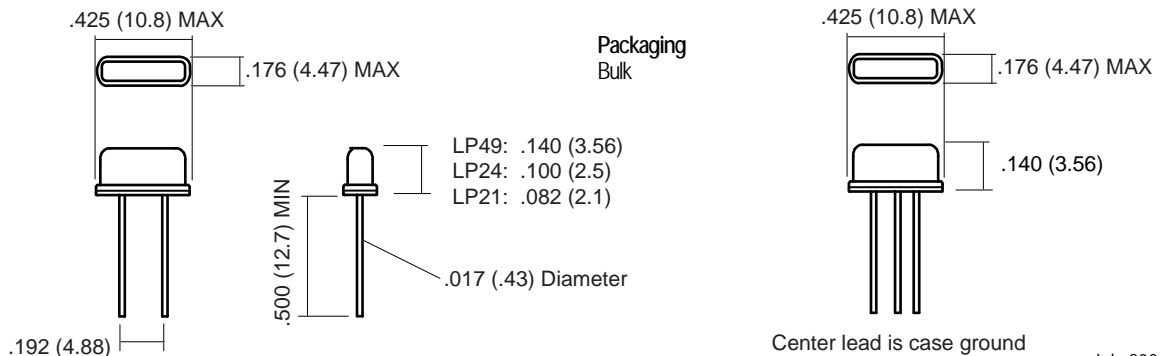

July 2006