

# AX431 Series

Adjustable Shunt Regulator

## Description

The AX431 series are three-terminal adjustable regulators with guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between  $V_{REF}$  (approximately 2.495 volts) and 36 volts with two external resistors. These devices have a typical dynamic output impedance of  $0.2\Omega$ . Active output circuitry provides a very sharp turn-on characteristic, making these devices excellent replacement for zener diodes in many applications.


## Features

- Programmable output voltage
- Temperature coefficient is 50ppm/°C typical
- Temperature compensated for operation over full temperature range
- Low output noise voltage
- Fast turn on response


## Ordering Information

Package	$V_{REF}: 2.495\pm 2\%$	$V_{REF}: 2.495\pm 1\%$	$V_{REF}: 2.495\pm 0.5\%$
SOT-23	AX431AN	AX431BN	AX431CN
SOT-89	AX431AM	AX431BM	AX431CM
TO-92	AX431AA	AX431BA	AX431CA
SO-8	AX431AS	AX431BS	AX431CS


AX431 Series Pin Assignment




3-Lead Plastic **SOT-23**  
 Package Code: N  
 Pin 1: Reference  
 Pin 2: Cathode  
 Pin 3: Anode



3-Lead Plastic **SOT-89**  
 Package Code: M  
 Pin 1: Reference  
 Pin 2: Anode  
 Pin 3: Cathode



3-Lead Plastic **TO-92**  
 Package Code: A  
 Pin 1: Reference  
 Pin 2: Anode  
 Pin 3: Cathode



3-Lead Plastic **SO-8**  
 Package Code: S  
 Pin 1: Cathode  
 Pin 2/3/6/7: Anode  
 Pin 4/5: NC  
 Pin 8: Reference

## Absolute Maximum Ratings


(Operating temperature range applies unless otherwise specified)

Characteristics	Symbol	Value		Unit
Cathode Voltage	$V_{KA}$	36		V
Cathode Current Range (Continuous)	$I_k$	-100~+150		mA
Reference Input Current Range	$I_{REF}$	0.05~+10		mA
Power Dissipation	$P_D$	SOT-23	280	mW
		SOT-89	770	
		TO-92	770	
		SO-8	770	
Operating Temperature Range	$T_{opr}$	0~+70		°C
Storage Temperature Range	$T_{stg}$	-65~+150		°C


## Operating Conditions

Characteristics	Symbol	Min.	Max.	Unit
Cathode Voltage	$V_{KA}$	$V_{REF}$	36	V
Cathode Current Range (Continuous)	$I_k$	1	100	mA

## Functional Block Diagram & Symbol

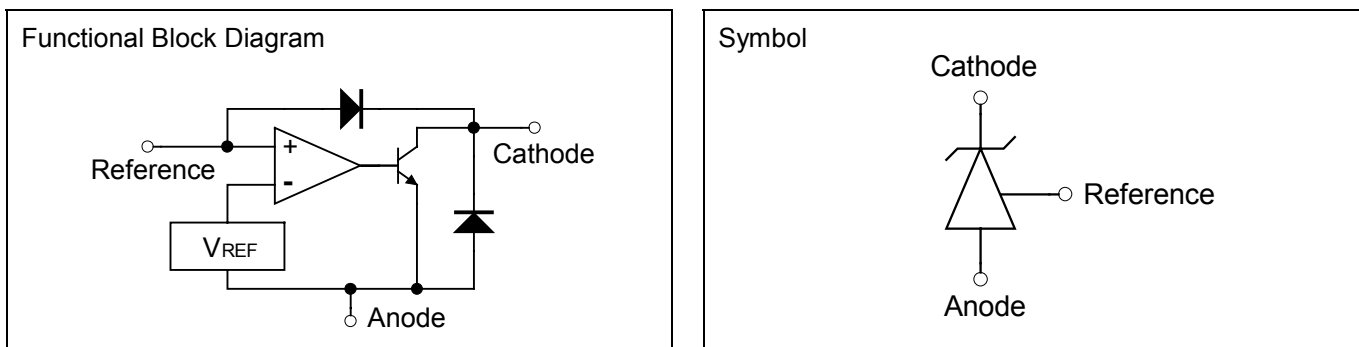






## Test Circuits

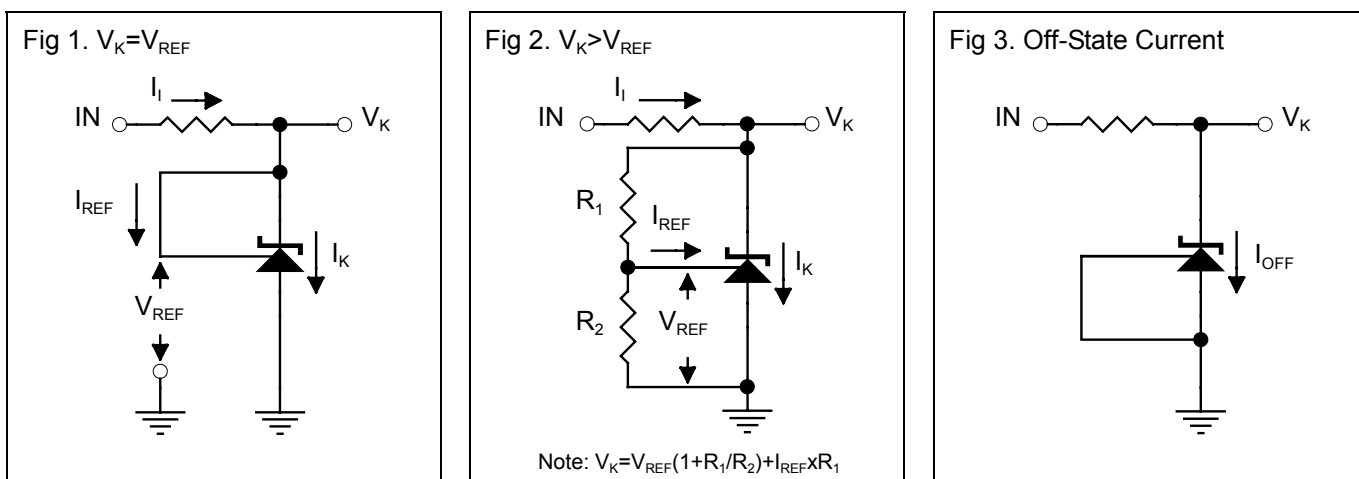

## Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise specified)


Characteristics		Symbol	Test Conditions	Min	Typ	Max	Unit
Reference Input Voltage <sup>(Fig1)</sup>	AX431AN/AM/AA/AS	V <sub>REF</sub>	V <sub>K</sub> =V <sub>REF</sub> , I <sub>K</sub> =10mA	2.445	2.495	2.545	V
	AX431BN/BM/BA/BS			2.470	2.495	2.520	
	AX431CN/CM/CA/CS			2.483	2.495	2.507	
Deviation of Reference Input Voltage Over-Temperature <sup>(Fig1)</sup>	V <sub>REF(dev)</sub>	V <sub>K</sub> =V <sub>REF</sub> , I <sub>K</sub> =10mA T <sub>min</sub> ≤ T <sub>a</sub> ≤ T <sub>max</sub>	-	4	17	mV	
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage <sup>(Fig2)</sup>	ΔV <sub>REF</sub> / ΔV <sub>K</sub>	I <sub>K</sub> =10mA, ΔV <sub>K</sub> =10V to V <sub>REF</sub>	-	-1.4	-2.7	mV/V	
		I <sub>K</sub> =10mA, ΔV <sub>K</sub> =36V to 10V	-	-1.0	-2.0	mV/V	
Reference Input Current <sup>(Fig2)</sup>	I <sub>REF</sub>	I <sub>K</sub> =10mA, R <sub>1</sub> =10kΩ, R <sub>2</sub> =∞	-	2	4	μA	
Deviation of Reference Input Current Over Full Temperature Range <sup>(Fig2)</sup>	I <sub>REF(dev)</sub>	I <sub>K</sub> =10mA, R <sub>1</sub> =10kΩ, R <sub>2</sub> =∞, T <sub>a</sub> =Full Range	-	0.4	1.2	μA	
Minimum Cathode Current for Regulation <sup>(Fig1)</sup>	I <sub>K(min)</sub>	V <sub>K</sub> =V <sub>REF</sub>	-	0.4	1.0	mA	
Off-State Cathode Current <sup>(Fig3)</sup>	I <sub>K(off)</sub>	V <sub>K</sub> =36V, V <sub>REF</sub> =0	-	0.1	1.0	μA	
Dynamic Output Impedance <sup>(Fig1)</sup>	Z <sub>K</sub>	V <sub>K</sub> =V <sub>REF</sub> , f ≤ 1kHz I <sub>K</sub> =1 to 100mA	-	0.2	0.5	Ω	

## Characteristics Curve

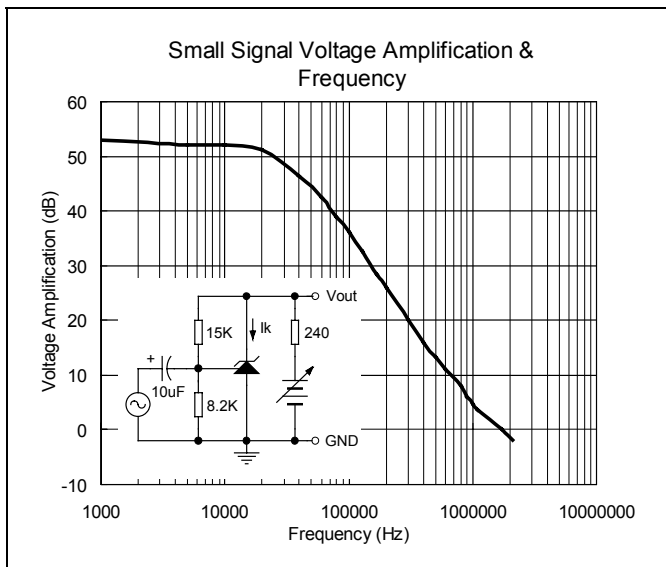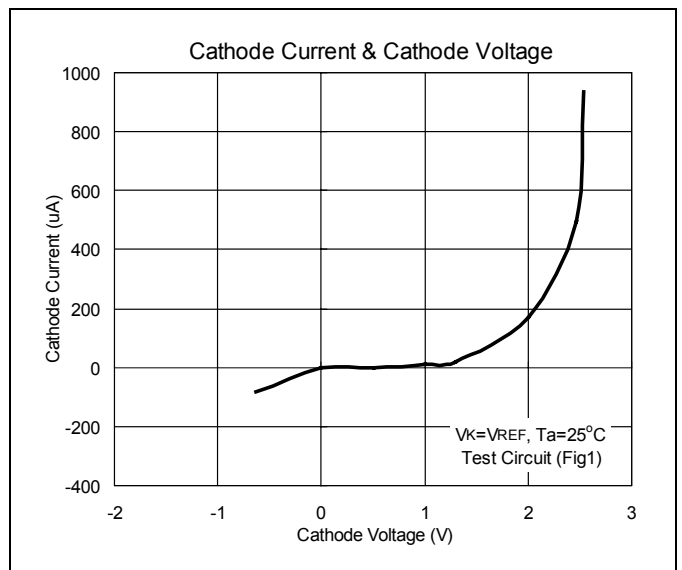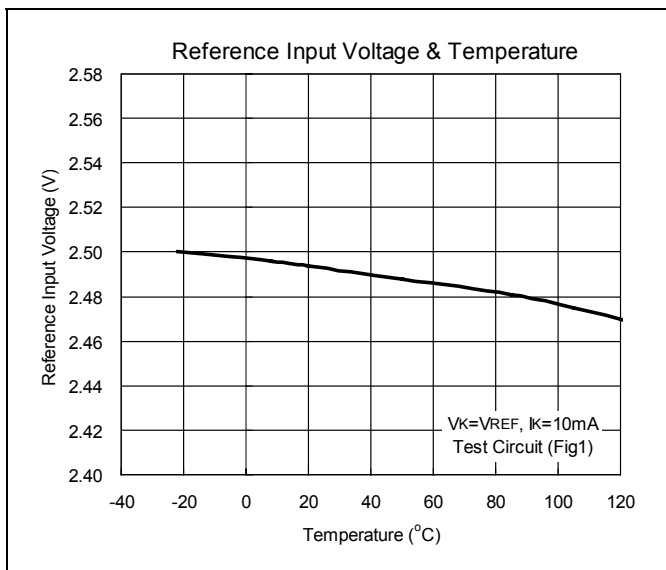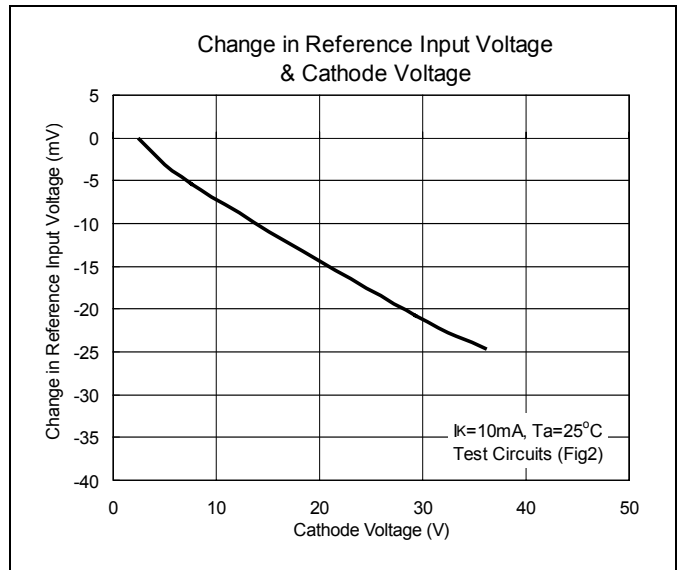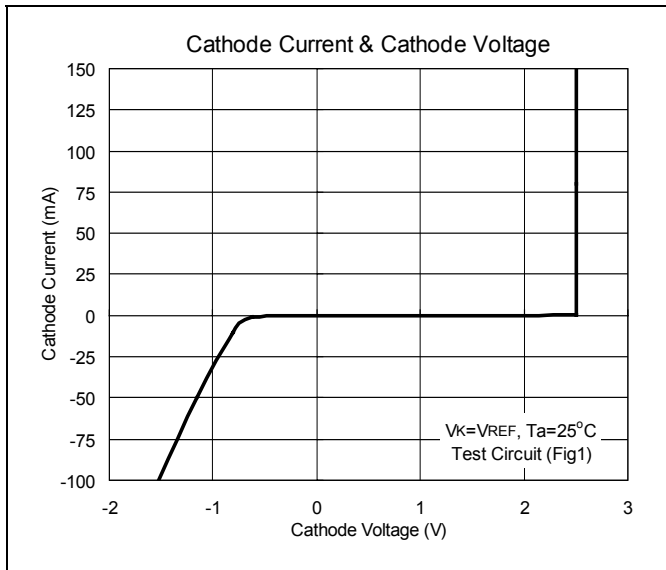


## Typical Application

Fig 4. Shunt Regulator

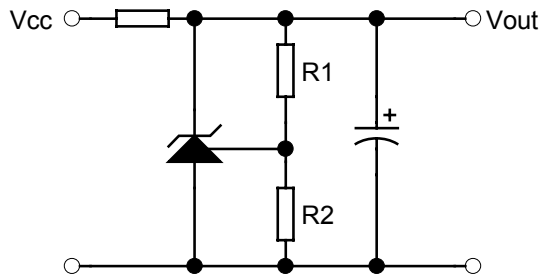


$$V_{out} = (1 + R_1/R_2)V_{REF}$$

Fig 5. High Current Shunt Regulator

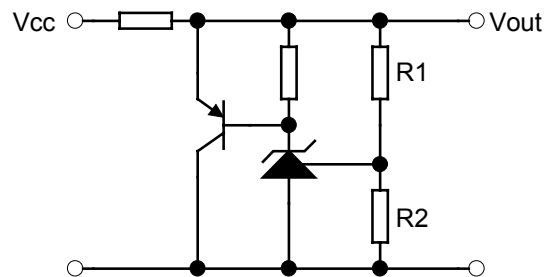


$$V_{out} = (1 + R_1/R_2)V_{REF}$$

Fig 6. Output Control of a Three-Terminal Fixed Regulator

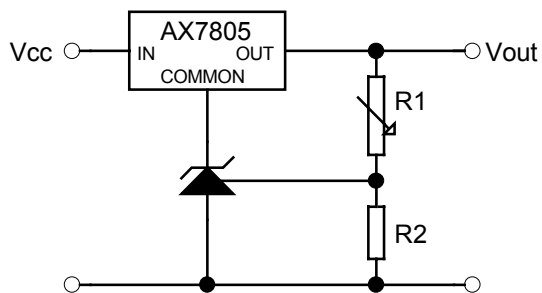


$$V_{out} = (1 + R_1/R_2)V_{REF}; V_{out(min)} = V_{REF} + 5V$$

Fig 7. Series Pass Regulator

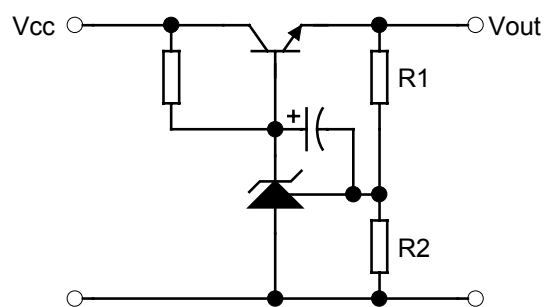


$$V_{out} = (1 + R_1/R_2)V_{REF}; V_{out(min)} = V_{REF} + V_{BE}$$

Fig 8. Current Limiter or Current Source

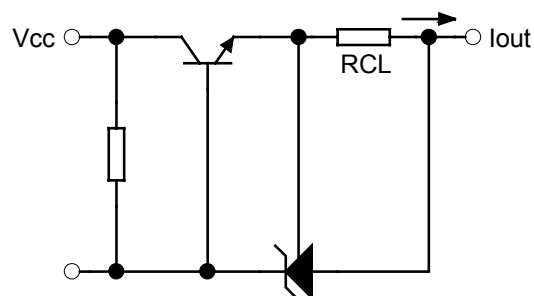


$$I_{out} = V_{REF}/R_{CL}$$

Fig 9. Constant Current Sink

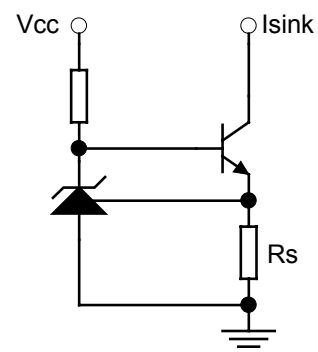


$$I_{sink} = V_{REF}/R_S$$


## SOT-23 Dimension

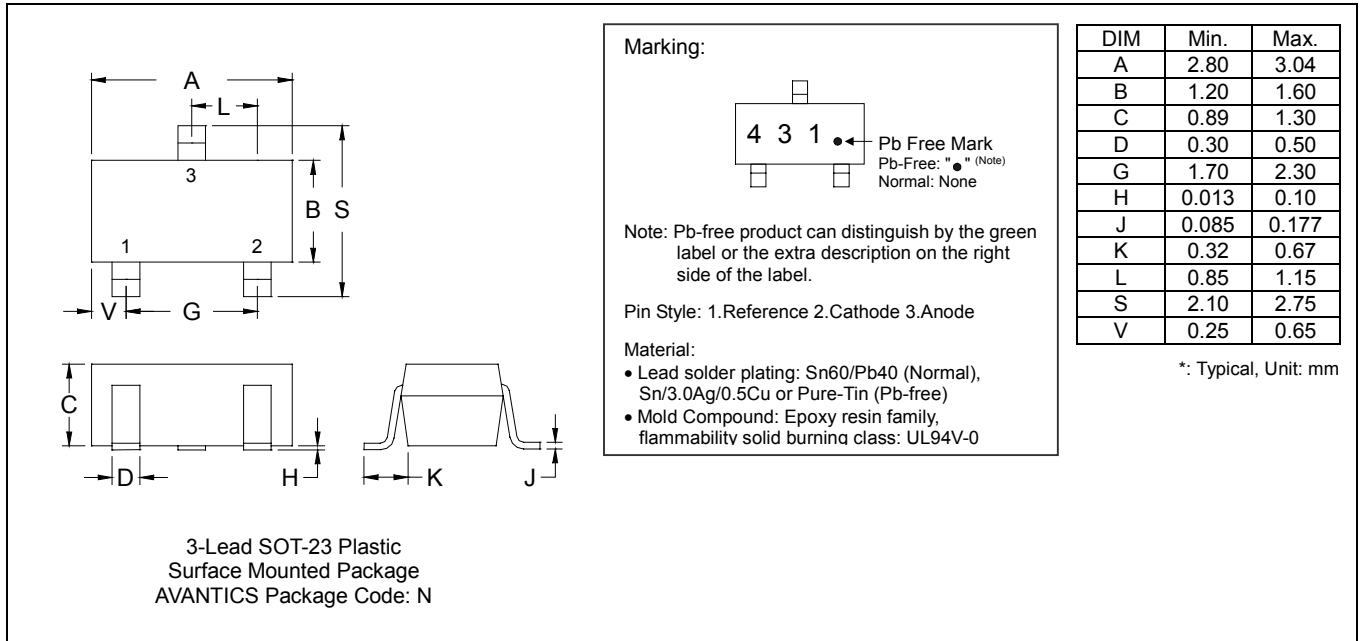

## SOT-89 Dimension

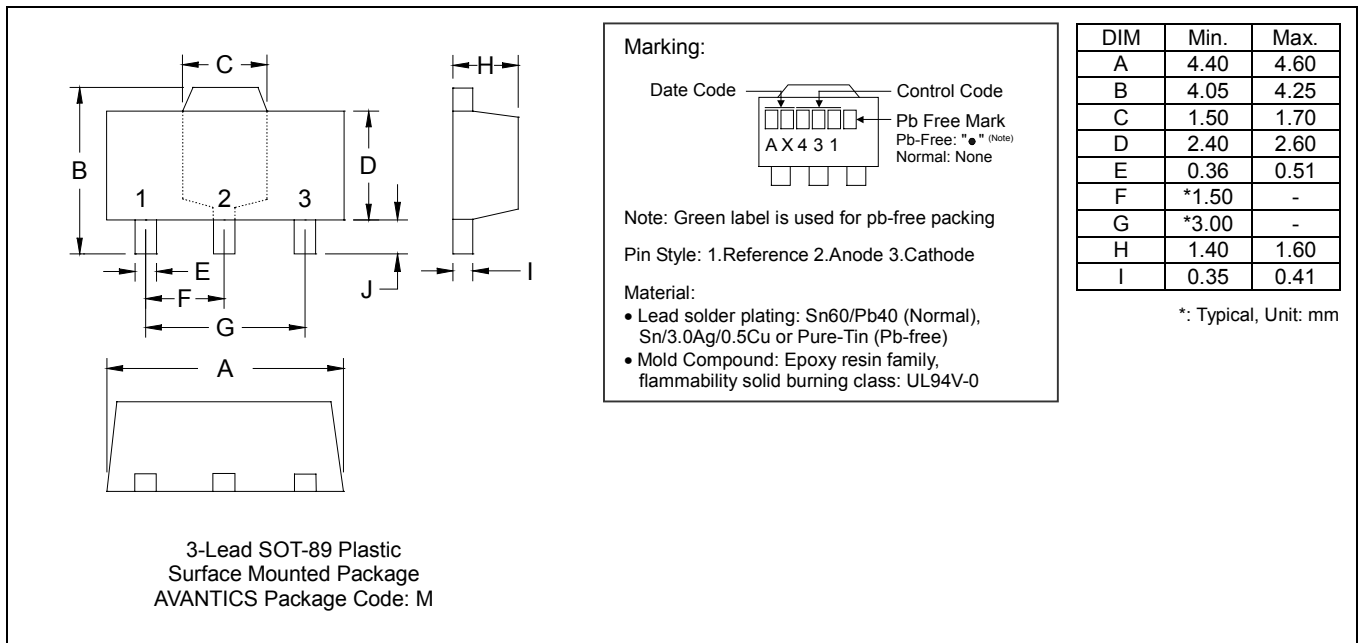


## TO-92 Dimension

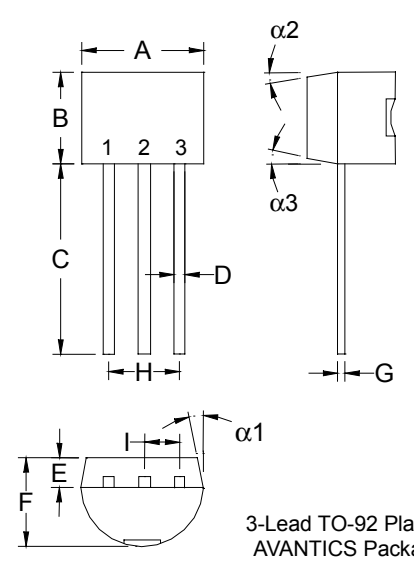

3-Lead TO-92 Plastic Package  
AVANTICS Package Code: A

**Marking:**

Pb Free Mark  
Pb-Free: \*●<sup>(Note)</sup>  
Normal: None



Date Code      Control Code


Note: Green label is used for pb-free packing  
Pin Style: 1.Reference 2.Anode 3.Cathode

Material:  
• Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)  
• Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	4.33	4.83
B	4.33	4.83
C	12.70	-
D	0.36	0.56
E	-	*1.27
F	3.36	3.76
G	0.36	0.56
H	-	*2.54
I	-	*1.27
α1	-	*5°
α2	-	*2°
α3	-	*2°

\*: Typical, Unit: mm


## SO-8 Dimension

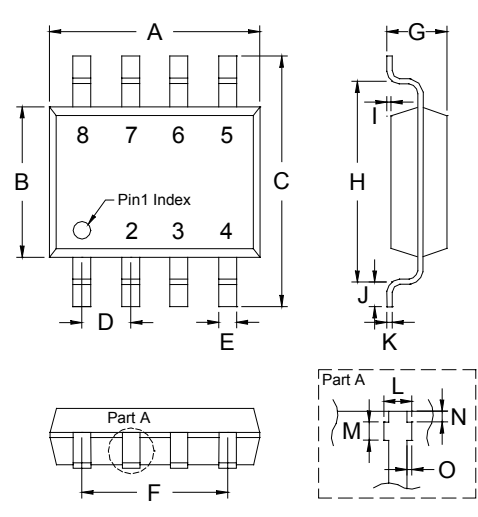

8-Lead SO-8 Plastic Surface Mounted Package  
AVANTICS Package Code: S

**Marking:**

Pb Free Mark  
Pb-Free: \*●<sup>(Note)</sup>  
Normal: None



Pin 1 Mark  
Date Code      Control Code

Note: Green label is used for pb-free packing  
Pin Style: 1.Cathode 2/3/6/7.Anode 4/5.NC 8.Reference

Material:  
• Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)  
• Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	4.85	5.10
B	3.85	3.95
C	5.80	6.20
D	1.22	1.32
E	0.37	0.47
F	3.74	3.88
G	1.45	1.65
H	4.80	5.10
I	0.05	0.20
J	0.30	0.70
K	0.19	0.25
L	0.37	0.52
M	0.23	0.28
N	0.08	0.13
O	0.00	0.15

\*: Typical, Unit: mm

### Important Notice:


- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of AVANTIC.
- AVANTICS reserves the right to make changes to its products without notice.
- **AVANTICS semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- AVANTICS assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

### Head Office:

- AVANTICS Microelectronics Corp: No. 255, Cai Lun Rd. Zhangjiang Technology Industrial Park Pudong, Shanghai, China  
Tel: 86-021-58955599 Fax: 86-021-58558038

## Soldering Methods for AVANTICS's Products

1. Storage environment: Temperature=10°C~35°C Humidity=65%±15%
2. Reflow soldering of surface-mount devices

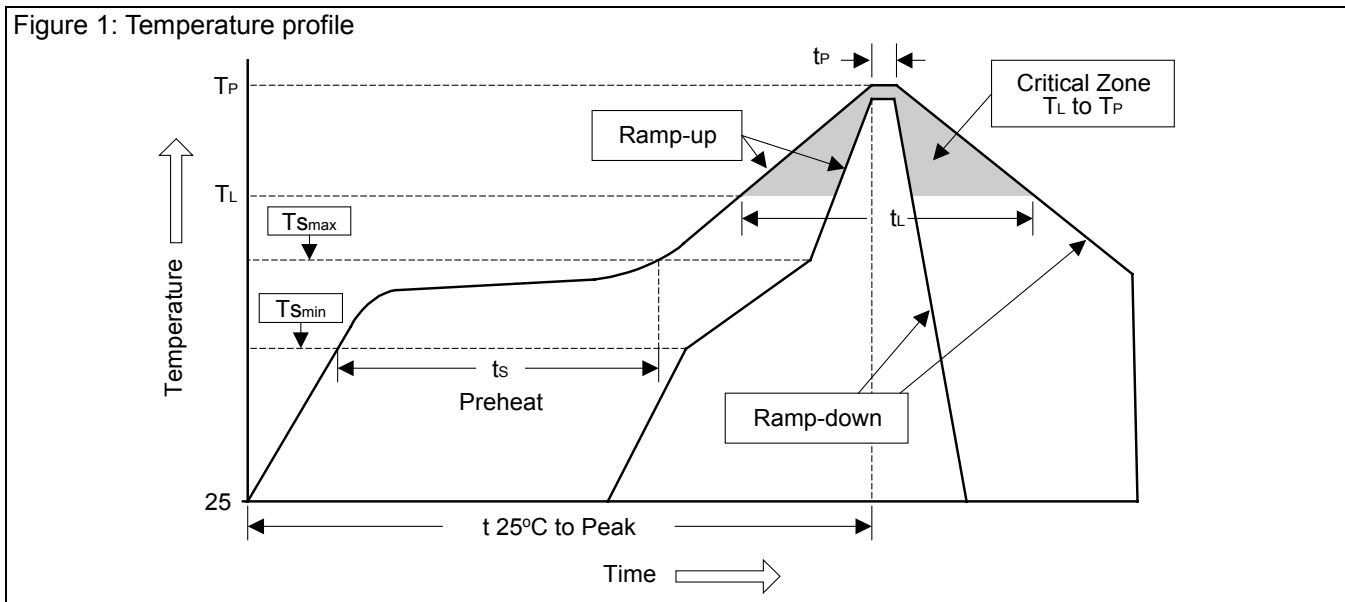

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	<3°C/sec	<3°C/sec
Preheat		
- Temperature Min ( $T_{smin}$ )	100°C	150°C
- Temperature Max ( $T_{smax}$ )	150°C	200°C
- Time (min to max) ( $t_s$ )	60~120 sec	60~180 sec
$T_{smax}$ to $T_L$		
- Ramp-up Rate	<3°C/sec	<3°C/sec
Time maintained above:		
- Temperature ( $T_L$ )	183°C	217°C
- Time ( $t_L$ )	60~150 sec	60~150 sec
Peak Temperature ( $T_P$ )	240°C +0/-5°C	260°C +0/-5°C
Time within 5°C of actual Peak Temperature ( $t_P$ )	10~30 sec	20~40 sec
Ramp-down Rate	<6°C/sec	<6°C/sec
Time 25°C to Peak Temperature	<6 minutes	<8 minutes

### 3. Flow (wave) soldering (solder dipping)

Products	Peak temperature	Dipping time
Pb devices.	245°C ±5°C	5sec ±1sec
Pb-Free devices.	260°C +0/-5°C	5sec ±1sec