




AC-Capacitors, Suppression Capacitors Class Y2 (X1) AC 305V (MKT)

LEAD LENGTH (X) (mm)		Code Pos.11	ORDERING CODE** (see page 49 - Document No. 26511)					
			1-4	5-7	8	9	10	11-13
4 ⁻¹		B	1710	3	.	B .0
6 ⁻¹		C	1710	3	.	C .0
15 ⁻¹		D	1710	3	.	D .0
30 ⁺⁵		L	1710	3	.	L .0

pcm (mm)	Pitch Code Pos. 10	Terminal Ød (mm)
10	D	0.6
> 10	F, I or K	0.8

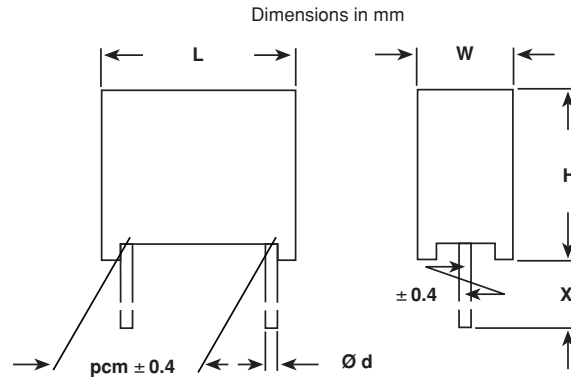

REFERENCE STANDARDS:

EN/IEC 60068; IEC 60384-14/2 1993/07
UL 1414; CSA C22 2 No. 1-M 1994

DIELECTRIC: Polyester film

ELECTRODES: Metal evaporated

RATED VOLTAGE: AC305V; 50/60Hz

PERMISSABLE DC VOLTAGE: DC1000V

CAPACITANCE RANGE: E12 series 1000pFY2 -0.1µFY2(X1)
preferred values acc. to E6

CAPACITANCE TOLERANCE:

Standard ± 20%; on request ± 10% and ± 5%

TERMINALS:

Radial tinned copper wire



COATING: Plastic case, epoxy resin sealed,
flame retardant; UL 94V-0

CLIMATIC TESTING CLASS ACC. TO

EN/IEC 60068-1: 40/100/56

TEST VOLTAGE:

(Electrode/electrode): DC 5000V for 1 sec. at 25°C;
Between interconnected terminations and case (foil method);
AC 2500V for 2 sec. at 25°C

DISSIPATION FACTOR TAN δ: < 1% measured at 1kHz

INSULATION RESISTANCE:

30 GΩ average value
15 GΩ average value

FURTHER TECHNICAL DATA:

See page 71 (Document Number 26525)

MAXIMUM PULSE RISE TIME: (du/dt) in V/µs			
RATED VOLTAGE	PITCH (mm)		
	10.0/15.0	22.5	27.5
AC 305V	200	150	100

CAPACITANCE Code Pos 5-7 (as class Y2 and X1)	TOLERANCE Code Pos 8 J = ± 5% K = ± 10% M = ± 20%	PITCH Code Pos. 10 (mm)	BOX NO	DIMENSIONS W x H x L (mm) ^{+0.2 / -0.4mm}	WEIGHT (Lead Length 6 ⁻¹ mm) (g)	QUANTITY PACKAGE (Lead Length ≤ 6 ⁻¹ mm) (pcs)*	ORDERING CODE**					Lead Length Design Design
							TYPE	C-Value	Tolerance	Voltage	Pitch	
							1-4	5-7	8	9	10	11-13
1000 pF	M	10.0	D	32	3.8 x 8.8 x 12.8	0.6	1710	210	M	3	D	.B0
1200 pF	M	10.0	D	32	3.8 x 8.8 x 12.8	0.6	1710	212	M	3	D	.B0
1500 pF	M	10.0	D	32	3.8 x 8.8 x 12.8	0.6	1710	215	M	3	D	.B0
1800 pF	M	10.0	D	32	3.8 x 8.8 x 12.8	0.6	1710	218	M	3	D	.B0
2200 pF	M	10.0	D	02	4.3 x 9.3 x 12.8	0.8	1710	222	M	3	D	.B0
2700 pF	M	10.0	D	03	5.3 x 10.3 x 12.8	1.0	1710	227	M	3	D	.B0
3300 pF	M	10.0	D	03	5.3 x 10.3 x 12.8	1.0	1710	233	M	3	D	.B0
3900 pF	M	10.0	D	03	5.3 x 10.3 x 12.8	1.0	1710	239	M	3	D	.B0
4700 pF	M	10.0	D	03	5.3 x 10.3 x 12.8	1.0	1710	247	M	3	D	.B0
5600 pF	M	10.0	D	04	6.3 x 11.3 x 12.8	1.3	1710	256	M	3	D	.B0
6800 pF	M	10.0	D	04	6.3 x 11.3 x 12.8	1.3	1710	268	M	3	D	.B0
8200 pF	M	10.0	D	04	6.3 x 11.3 x 12.8	1.3	1710	282	M	3	D	.B0
0.010 µF	M	10.0	D	04	6.3 x 12.3 x 12.8	1.3	1710	310	M	3	D	.B0

* Further information about packaging quantities with different lead length and/or taped versions.

See page 16 (Document No 27608 Packaging Quantities). Use Box No. as reference

** These capacitors can be delivered on continuous tape and reel see page 14/15 (Document Number 27622)

Ordering example: 1710-210 M 2 D CB0

B0 = Bulk Pack T0 = Tray/Pallet



CAPACITANCE Code Pos 5-7 (as class Y2 and X1)	TOLERANCE Code Pos 8 J = ± 5% K = ± 10% M = ± 20%	PITCH		BOX NO	DIMENSIONS W x H x L (mm) ^{+0.2 / -0.4mm}	WEIGHT (Lead Length 6*mm) (g)	QUANTITY PACKAGE (Lead Length ≤ 6*mm) (pcs)*	ORDERING CODE**					
		(mm)	Code Pos. 10					TYPE	C-Value	Tolerance	Voltage	Pitch	Lead Length Design Code
								1-4	5-7	8	9	10	11-13
1000 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	210	M	3	F	. B0
1200 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	212	M	3	F	. B0
1500 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	215	M	3	F	. B0
1800 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	218	M	3	F	. B0
2200 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	222	M	3	F	. B0
2700 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	227	M	3	F	. B0
3300 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	233	M	3	F	. B0
3900 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	239	M	3	F	. B0
4700 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	247	M	3	F	. B0
5600 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	256	M	3	F	. B0
6800 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	268	M	3	F	. B0
8200 pF	M	15	F	06	6.3 x 12.3 x 17.8	2.0	500	1710	282	M	3	F	. B0
0.01 μF	M	15	F	06	6.3 x 12.3 x 17.8	2.0	500	1710	310	M	3	F	. B0
0.012 μF	M	15	F	07	7.3 x 13.3 x 17.8	2.4	450	1710	312	M	3	F	. B0
0.015 μF	M	15	F	07	7.3 x 13.3 x 17.8	2.4	450	1710	315	M	3	F	. B0
0.018 μF	M	15	F	28	8.3 x 17.3 x 17.8	3.4	300	1710	318	M	3	F	. B0
0.022 μF	M	15	F	28	8.3 x 17.3 x 17.8	3.4	300	1710	322	M	3	F	. B0
0.027 μF	M	22.5	I	09	6.3 x 14.3 x 26.3	3.5	260	1710	327	M	3	I	. . 0
0.033 μF	M	22.5	I	09	6.3 x 14.3 x 26.3	3.5	260	1710	333	M	3	I	. . 0
0.039 μF	M	22.5	I	11	7.3 x 15.3 x 26.3	3.9	235	1710	339	M	3	I	. . 0
0.047 μF	M	22.5	I	12	8.3 x 16.3 x 26.3	4.8	200	1710	347	M	3	I	. . 0
0.056 μF	M	22.5	I	13	10.3 x 18.3 x 26.3	6.6	170	1710	356	M	3	I	. . 0
0.068 μF	M	22.5	I	13	10.3 x 18.3 x 26.3	6.6	170	1710	368	M	3	I	. . 0
0.082 μF	M	27.5	K	14	11.0 x 20.3 x 31.3	9.4	125	1710	382	M	3	I	. . 0
0.1 μF	M	27.5	K	14	11.0 x 20.3 x 31.3	9.4	125	1710	410	M	3	I	. . 0

Preferred values in bold print.

* Further information about packaging quantities with different leadlength and/or taped versions.



See page 16 (Document No 27608 Packing Quantities). Use Box No as reference

**These capacitors can be delivered on continuous tape and reel see page 14/15 (Document Number 27622)

The ordering code is then: F1710 - . . . M 3 . 0R0 at H = 16.5mm, F1710 - . . . M 3 . 0W0 at H = 18.5mm.

APPROVALS

COUNTRY	SPECIFICATION	ELECTRICAL VALUES	APPROVAL REFERENCE	APPROVAL MARK
U.S.A (for AC 250V)	UL 1283 UL 1414	1000pFY - 0.1μFY 1000pFY - 0.1μFY	E 76297 E 100682	
Canada (for AC 250V)	C 22.2 No. 1-M 1994	1000pFY - 0.1μFY	LR 64546-7	
CB TEST-CERTIFICATE (for AC 305V)		1000pF - 0.1μFY2 (X1)	DE 1-10088	
Germany (for AC 305V)	EN 132 400, 1999-06 IEC 60384-14, 2nd edition, 1995-06	1000pF - 0.1μFY2 (X1)	136954L	

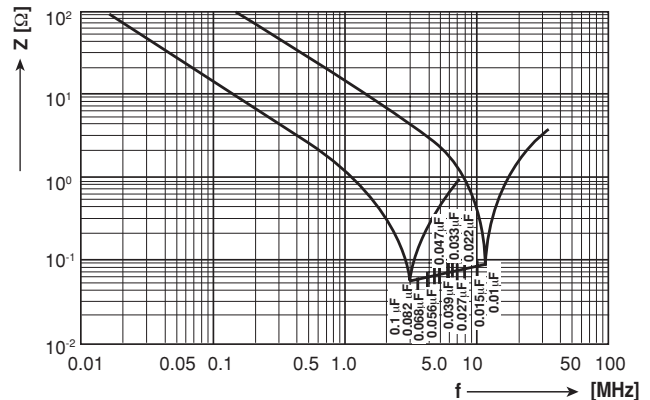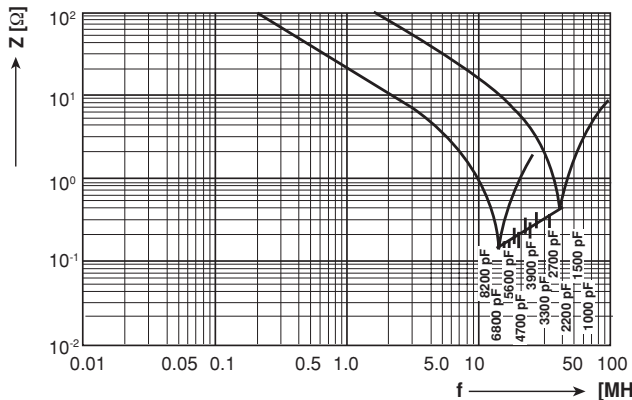

Impedance (Z) as a function of frequency (f) at T_a = 20°C (average). Measurement with lead length 6mm.