

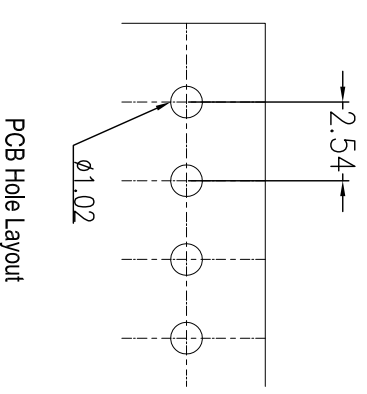
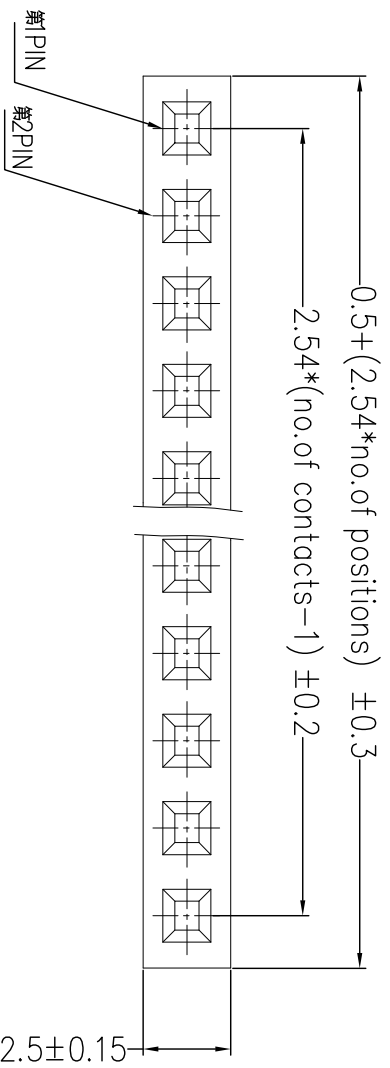


REV.	DESCRIPTION	DATE



- NOTE:**
- Material:**
1. Housing: Polyester, UL94V-0.
  2. Terminal: Copper alloy.
  3. Plating: Gold-plated.
- Electrical:**
1. Current rating: 3 Amp.
  2. Contact resistance: 30mΩ Max.
  3. Insulator resistance: 5000MΩ Min.
  4. Dielectric withstand: AC 1000 V.
  5. Temperature: -40°C ~ +105°C

Available pins: 03~40 contacts

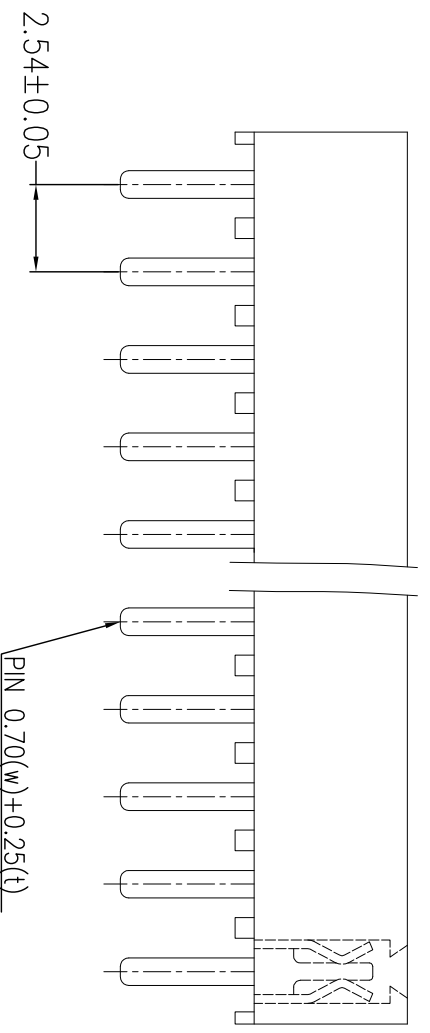

DRAWER <i>Chiu Chuan Siao</i>	TOLERANCE	DRAWER <i>Chiu Chuan Siao</i>	NAME <b>SynLight</b> 日亮電子科技有限公司 <i>Sun-Light Electronic Technologies Inc.</i>
	CHECK <i>Shi Jiong Siao</i>		
UNITS : mm	DESIGNED <i>Chiu Chuan Siao</i>	DATE 12 / 10 / 2010	PART NO. F2540-H50-SDIP-XX
SCALE FREE	APPROVAL <i>Shaw Tseng Siao</i>	SIZE A4	DRAW NO. F2540-H50-SDIP
	DATE 12 / 10 / 2010		REV.
	SIZE A4		SHEET 1 OF 1
			REV.
			A