
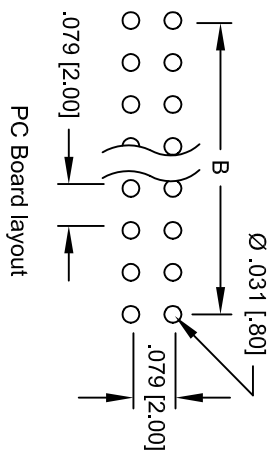
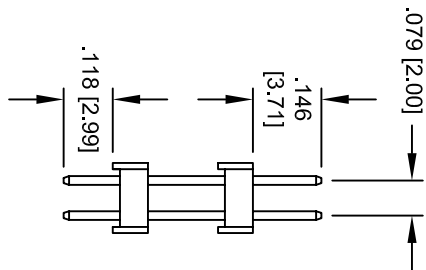
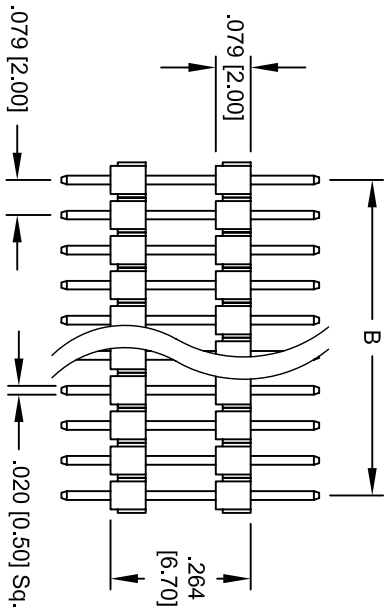


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|--------|------|
| - | | RELEASED | 9/9/04 | |

APPROVED: _____
 DATE: _____ TITLE: _____

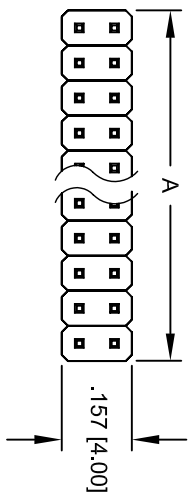

A = .079" [2.00] x No. of positions
 B = .079" [2.00] x No. of spaces

SPECIFICATIONS:

- Material:** Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color:** Black
- Contacts:** Brass
- Plating:** Gold Flash over Nickel underplate overall
- Electrical:** Operating voltage: 250 VAC max
- Current rating:** 1 Amp max
- Contact resistance:** 20 mohms max
- Insulation resistance:** 5000 Mohms min @ 500 VDC
- Dielectric withstanding voltage:** 1000 VAC for 1 minute
- Temperature Rating:** Operating temperature: -55°C to +105°C

| | |
|--|--------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] | |
| TOLERANCES: EXCEPT AS NOTED | |
| INCHES | HOLES |
| .X ± .10 | Ø.X ± .10 |
| .XX ± .020 | Ø.XX ± .015 |
| .XXX ± .015 | Ø.XXX ± .010 |
| APPROVALS | DATE |
| DRAWN | SS |
| CHECKED | |
| APPROVED | |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 STACKED PIN HEADER, .079" PITCH
 DUAL ROW, PCB

| | | |
|------|-------------------------|--------------|
| SIZE | PART NO. | REV. |
| X | D2PH-2-XX-U-146/118/264 | - |
| REF: | SCALE: NTS | SHEET 1 OF 1 |