

MAJOR LEAGUE ELECTRONICS

.050" c.l. Board Stacker Terminal Strips - Surface Mount



□ **BSTCM-5** □ □ - **D** - □ □ - □ □ - □ □ - □ □ - □ □ - □ □

H High Temp.

Pins per row 01-50

Doubles **D**

Pin Options

Length		
(5,97)	.235	06
(8,43)	.332	08
(9,70)	.382	10
(10,97)	.432	12
(12,24)	.482	14
(13,51)	.532	16
(14,78)	.582	18
(16,06)	.632	20
(17,32)	.682	22

(Metric Dimensions) .145 (3,68) minimum board space

Plating Options

GT = 15µ in gold in contact area,
150µ in tin/lead on tail / Nickel Barrier **GT**

H = 30µ gold, 150µ tin/lead on tail / Nickel Barrier **H**





Other plating options available upon request

Custom Board Space

Position for Polarization Option 001-100

Tape & Reel Option **TR**

Removable Pick & Place Option **P**

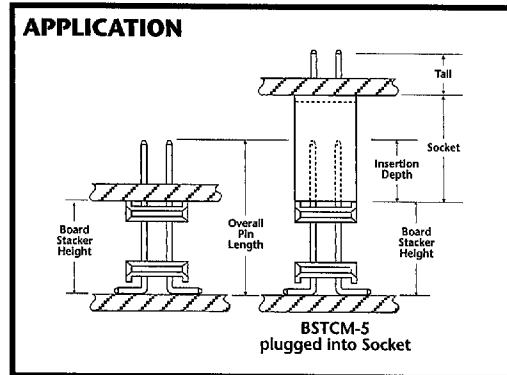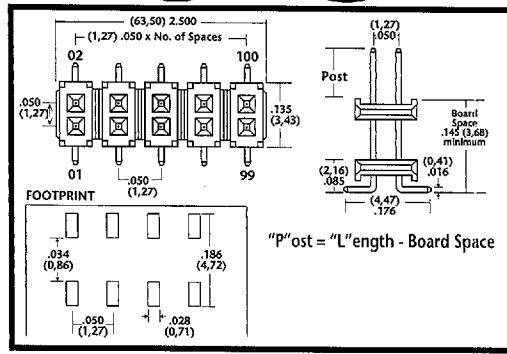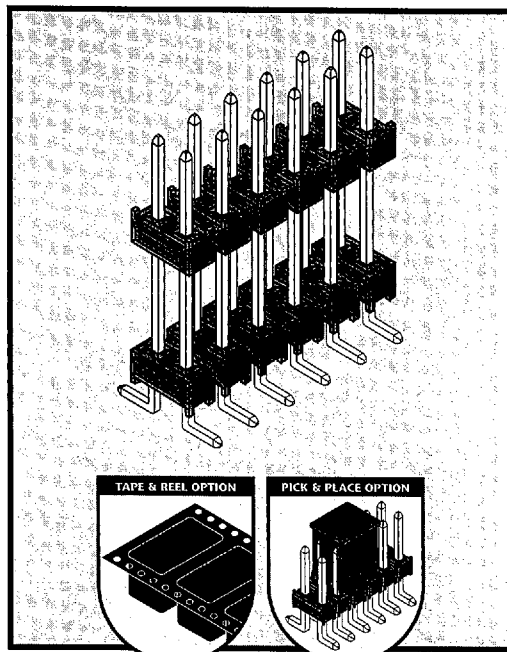

Materials & Performance Specifications

	STANDARD	HIGH TEMPERATURE
Insulator	Black, glass filled, polyester	High temperature thermoplastic
Terminal	Phosphor Bronze	Phosphor Bronze
Insulation Resistance	5,000M Ω minimum	5,000M Ω minimum
Flammability	UL 94V-O	UL 94V-O
Temperature Range	-65°C to +125°C	-65°C to +250°C
Current Rating	3 ampere	3 ampere
Plating	All Plating Options over 50µ in Ni	All Plating Options over 50µ in Ni

Product cut to specific sizes is noncancellable/nonreturnable.
Parts are subject to change without notice.

Delivery On Time Every Time...Or The Order's Free!

24F 9019296 0000065 81T
Tel: 812-944-7244 • Facsimile: 812-944-7268 • Email: mle@iglou.com

.050"