


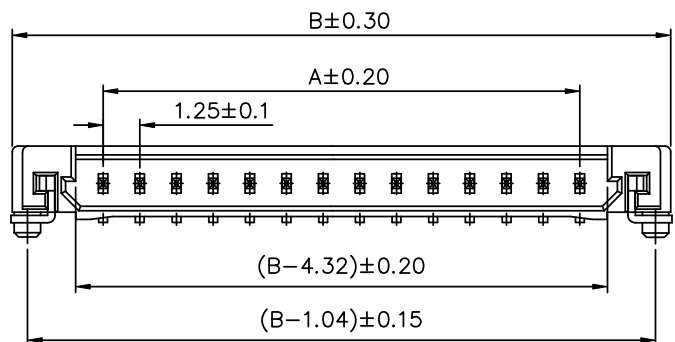



SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstanding Voltage: 500V AC/Minute
 Terminal: Brass/Tin Plated Over Nickel
 Insulator: PA6T UL 94V-0
 Fixture: Brass/Tin Plated Over Nickel
 RoHS Compliant

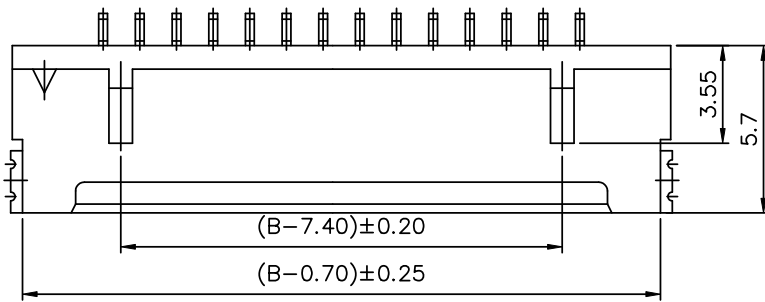

2 Pin

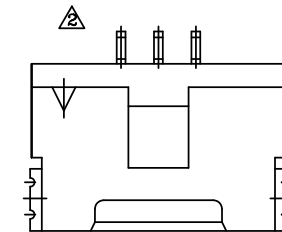

3 Pin

Contact	A	B
4	3.75	9.95
5	5.00	11.20
6	6.25	12.45
7	7.50	13.70
8	8.75	14.95
9	10.00	16.20
10	11.25	17.45
11	12.50	18.70
12	13.75	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
16	18.75	24.95
20	23.75	29.95
25	30.00	36.20
30	36.25	42.45

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.				
PART No. Δ DFFXXW-H		MEI			Δ A2	Modify DATA	HZF	07/31/2008
DRAWING No. DFFXXW-H		BECKY			Δ A1	Modify ILZXXW \rightarrow DFFXXW	INGRID	2007/09/24
SCALE NONE		TCF			Δ A0	NEW RELEASE	BECKY	2004/09/24
REV.	A2	UNIT mm		NO.	REV.	REVISIONS		CHK DATE