


## TYPE Q2A

### QIKLUG™

For Copper Cable

Compact, high copper alloy terminal for joining two cables to equipment pads or bars. Each element accommodates a wide range of cable. One-wrench installation.

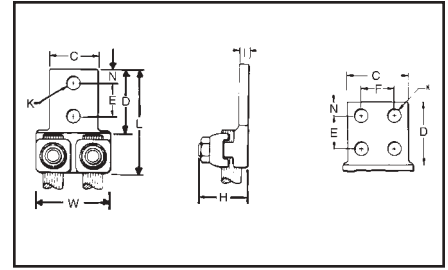

A-17



CATALOG NUMBER*	CONDUCTOR	NO. OF HOLES IN PAD	C	D	E & F	H	K	STUD HOLE SIZE	L	N	T	W	RECOMMENDED TIGHTENING TORQUE in-lb ▲		
Q2A1C-2	4 STR. - 1 STR.	2	1-1/2	1-7/8	1	1-1/16	7/16	3/8	2-7/8	7/16	7/32	1-13/16	150		
Q2A26-2N	1/0 STR. - 2/0 STR.	2 NEMA	1-5/8	3-1/8	3/4	1-3/16	9/16	1/2	4-3/16	5/8	7/32	1-15/16	180		
Q2A28-2N	3/0 STR. - 4/0 STR.	2 NEMA	1-7/8						4-3/8			1-15/16		250	
Q2A28-4N		4 NEMA	3										1-11/16		4-1/2
Q2A31-2N	250 - 350	2 NEMA	2-3/8						1-11/16			4-1/2		5/16	
Q2A31-4N		4 NEMA	3	2	4-11/16	3/8	3	375							
Q2A34-2N	400 - 500	2 NEMA	2-1/2				2		4-11/16	5/8	3	3			
Q2A34-4N		4 NEMA	3	2-7/16	5	7/16		3-3/4							
Q2A40-2N	600 - 800	2 NEMA	3				3-1/4	1-3/4	2-3/4	9/16	1/2	5	5/8	1/2	3-3/4
Q2A40-4N		4 NEMA		3-1/4	4-11/32										
Q2A44-4N	850 - 1000	4 NEMA	3-1/4			5-1/4									11/16
Q2A46-4N	1100 - 1500	4 NEMA	3-1/2	5-1/2	600										


\* "N" indicates NEMA standard stud holes.  
All 4N items ✓ See note page A-2

## TYPE Q3A

### QIKLUG™

For Copper Cable

Compact, high copper alloy terminal for joining three cables to equipment pads or bars. Each element accommodates a wide range of cable. One-wrench installation.

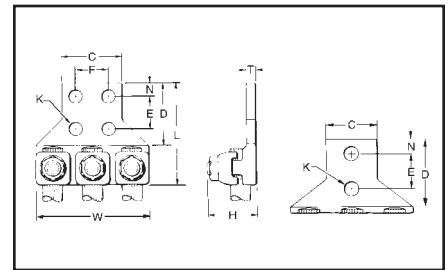

CATALOG NUMBER*	CONDUCTOR	NO. OF HOLES IN PAD	C	D	E & F	H	K	STUD HOLE SIZE	L	N	T	W	RECOMMENDED TIGHTENING TORQUE in-lb			
Q3A28-2N	3/0 STR. - 4/0 STR.	2 NEMA	1-7/8	3-1/8	1-3/4	1-3/8	9/16	1/2	4-5/16	5/8	1/4	3-3/16	250			
Q3A28-4N		4 NEMA	3						4-3/8							
Q3A31-2N	250 - 350	2 NEMA	2-3/8						1-11/16				4-7/16	5/16	4-1/16	325
Q3A31-4N		4 NEMA	3													
Q3A34-2N	400 - 500	2 NEMA	2-1/2	1-15/16	4-3/4	3/8	4-9/16	375								
Q3A34-4N		4 NEMA	3													
Q3A40-4N	600 - 800	4 NEMA	3	3-1/4	1-3/4	2-3/4	9/16	1/2	5	5/8	1/2	5-13/16	500			
Q3A44-4N	850 - 1000	4 NEMA	3-1/4						5-1/4			6-5/8				
Q3A46-4N	1100 - 1500	4 NEMA	3-1/2						5-1/2			7-7/8	600			

\* "N" indicates NEMA standard stud holes.