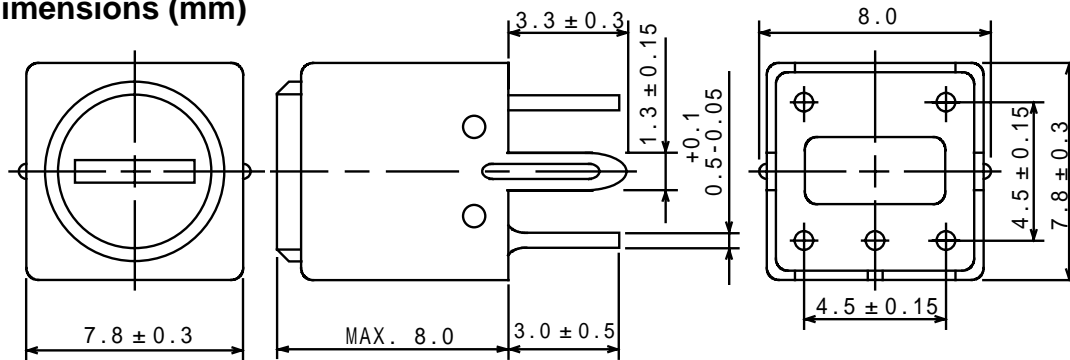


Type: P-7LC/FM, P-7LC/AM, P-7LC/SW, P-7LC/MW
Product Description


- 5.9 × 5.9mm Max.(L × W), 6.5mm Max. Height.
- Inductance:1~820 μ H.
- Operating frequency:20MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements


Feature

- Variable shielded type.
- FM, AM,SW,MW types are available.
- Internally assembled condenser is available.
- Ideally used in Radio (FM, AM,SW,MW),TV. Transceiver
- RoHS Compliance

Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch shall be measured at the root of terminal.
- * Dimension without tolerance are approx.

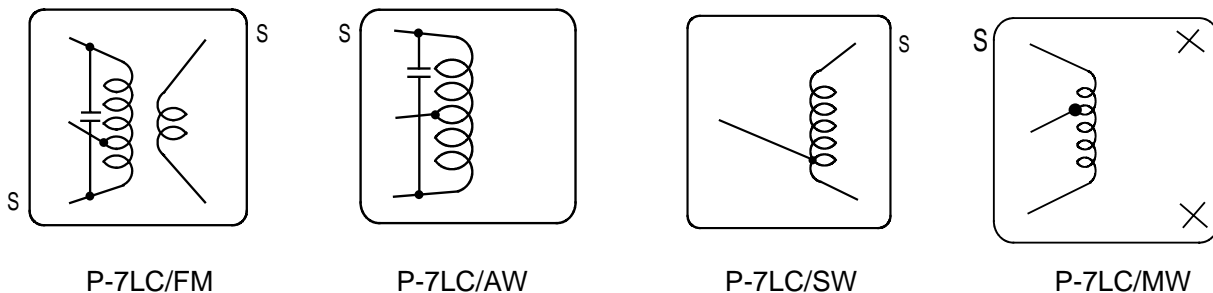Connection (Bottom View)


“S” is winding start.

Type: P-7LC/FM, P-7LC/AM, P-7LC/SW, P-7LC/MW
Specification (P-7LC/FM) (Part No. 2165-T045)

Item	(1-3)	Measuring Condition
Tuning frequency	10.7MHz±1% Variable	
Unloaded Qu	55 Min.	10.7MHz
Capacity(Int.)	150pF±10% Within	
Ext. stray capacity 2pF between (1-3) at measuring.		

Specification (P-7LC/AM) (Part No. 2164-T030)

Item	(1-3)	Measuring Conditions
Tuning Frequency	455kHz±2% Variable	
Unloaded Qu	Min.60	455kHz
INT. Capacity	180pF±10%	
Ext. stray capacity 0pF between (1-3) at measuring.		

Specification (P-7LC/MW) (Part No. 2166-T033)

Item	(1-3)	Measuring Conditions
Inductance	270 μ H ± 3% Variable	796kHz
Unloaded Qu	60 Min.	796kHz

Specification (P-7LC/SW) (Part No. 2167-T015)

Item	(4-6)	Measuring Conditions
Inductance	32 μ H ± 1% Variable	2.52MHz
Unloaded Qu	40 Min.	2.52MHz