



Features

- Small size
- SMT-compatible
- Easily formed leads
- Sputtered ruthenium contacts
- Hermetically sealed contacts
- Fast switching speed — up to 500Hz
- Wide range of available magnetic sensitivities
- Superior mechanical strength
- Enhanced for better auto placement

Applications


- Security
 - Proximity sensing
 - Smoke alarms
- Automotive
 - Level sensor
 - Lamp current sensor
- Relays

Description

Clare's Molded Mini DYAD dry reed switches are ideally suited for small switching signal applications. This switch has sputtered tuthenium contacts and an extraordinary seal strength, achieved by a patented laser sealing of the glass. In a low level or dry switching environments, both switches typically provide >1 billion operations. The switches have hermetically sealed contacts and offer a wide range of available magnetic sensitivities. In addition, the molding process provides a solid plastic outer shell. This plastic shell provides superior mechanical strength, eliminates concerns over handling glass switches, and provides an ideal solution for high speed, automated assembly environments.

Ordering Information

A complete part number is represented by the digits to the right. For example, CM10S2030 is a MOLDED MINI-DYAD™ with a minimum operate value of 10NI and a maximum of 30NI. Refer to the switch operating specification charts for available ranges. Special ranges are available upon request.

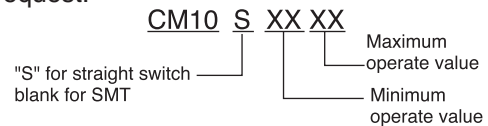

Surface Mount Molded Mini-DYAD
Refer to operating characteristics table for complete part number.

Standard Test Coil

The magnetic force (expressed in NI, AT or Ampere Turns) required to cause the reed switch contacts to close is called the pull-in or operate value.

| | CM10 |
|-------------------------------|-------------------|
| Part # | Coil - 1 |
| Coil definition | NARM1 CTC01 |
| Coil resistance | 1200Ω |
| Number of turns | 5,000 |
| Wire size (nom. diameter) | 0.0399mm (AWG 46) |
| Bobbin diameter (inside coil) | 3.96mm |
| Winding length | 10.4mm |

⁽¹⁾ Consult factory for test procedure.
The reed switch shall be placed in the test coil with the gap centered in the core of the coil winding. Test leads and their clips must be non-magnetic.
The longitudinal axis of the test coil and the test switch shall be vertical.

Molded Mini-DYAD™

| Part # | Operate Range (NI) ¹ |
|-----------|---------------------------------|
| CM10S1015 | 10 to 15 |
| CM10S1020 | 10 to 20 |
| CM10S1030 | 10 to 30 |
| CM10S1520 | 15 to 20 |
| CM10S1525 | 15 to 25 |
| CM10S2025 | 20 to 25 |

Molded Mini-DYAD™ Surface Mount

| Part # | Operate Range (NI) ^{1,2,3} |
|-----------|-------------------------------------|
| CM10-2308 | 10 to 15 |
| CM10-2288 | 10 to 20 |
| CM10-2339 | 10 to 30 |
| CM10-2285 | 15 to 20 |
| CM10-2289 | 15 to 25 |
| CM10-2286 | 20 to 25 |

¹ Tolerance = ± 1.5NI
² Full Blade Sensitivity
³ Surface Mount Switches are packaged 3,000 parts per reel

CM10

Absolute Maximum Ratings (@ 25° C)

| Parameter | Min | Typ | Max | Units |
|---|-----|-----|-----|-------|
| Switching Voltage CM10 - Molded Mini-DYAD™ | - | - | 200 | Volts |
| Switching Current CM10 - Molded Mini-DYAD™ | - | - | 0.5 | Amps |
| Carry Current CM10 - Molded Mini-DYAD™ | - | - | 2 | Amps |
| Switching Frequency CM10 - Molded Mini-DYAD™ | - | - | 500 | Hz |
| Contact Resistance CM10 - Molded Mini-DYAD™ | - | -0 | 100 | mΩ |

(See detailed specifications for more information.)

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this data sheet is not implied. Exposure of the device to the absolute maximum ratings for extended period may degrade the device and effect its reliability.

Specifications

All parameters are at 25°C unless otherwise stated.

| PARAMETER | CONDITIONS | SYMBOL | MIN | TYP | MAX | UNITS |
|--------------------------------------|--|------------------|-----------------|------------------|------|-----------------------|
| Contact Ratings | | | | | | |
| Operate ampere turns range | Full Blade Tolerance = ± 1.5NI | AT | 10 | - | 30 | NI |
| Release ampere turns range | Full Blade Tolerance = ± 1.5NI | AT | 5 | - | 30 | NI |
| Switching Voltage | Max DC/PeakAC Resistive | V _L | - | - | 200 | VDC |
| Switching Current | Max DC/PeakAC Resistive | I _L | - | - | 500 | mAmps |
| Carry Current | Max DC/PeakAC Resistive | I _C | - | - | 2.0 | Amps |
| Contact Rating | Max DC/PeakAC Resistive | - | - | - | 10 | VA |
| Life Expectancy | 1V, 10mA Signal Level | - | - | 1000 | - | x10 ⁶ Ops |
| | 10V, 10mA Low Level | - | - | 500 | - | -x10 ⁶ Ops |
| | 50V, 100mA Telecom Load | - | - | 2 | - | x10 ⁶ Ops |
| | 100V, 100mA Rated Loads | - | - | 2 | - | x10 ⁶ Ops |
| Static Contact Resistance | 50mV, 10mA ⁽¹⁾ | CR | - | 70 | 100 | Ω |
| Contact Material | | - | - | Ru | - | - |
| Switch Specifications | | | | | | |
| Insulation Resistance ⁽²⁾ | 100V, 25°C, 40% RH | IR | 10 ⁹ | 10 ¹¹ | - | Ω |
| Capacitance | Across Open Contacts | - | - | 0.3 | - | pF |
| Dielectric Strength ⁽⁵⁾ | Between Contacts | - | 250 | 300 | - | VDC/Peak AC |
| Operate Time, including bounce | At nominal coil voltage, 10Hz Square Wave | T _{OP} | - | - | 0.5 | ms |
| Release Time | Zener-Diode Suppression ⁽³⁾ | T _{REL} | - | - | 0.1 | ms |
| Environmental Ratings | | | | | | |
| Storage Temperature | | T _A | -40 | - | +125 | °C |
| Operating Temperature | | T _O | -40 | - | +125 | °C |
| Soldering Temperature | | - | - | - | +265 | °C |

⁽¹⁾ Contact resistance measured with 4 terminal method, 1.1" between test leads

⁽²⁾ >10¹² Ω is available upon request


⁽³⁾ A 24V zener in series with a diode across the coil

⁽⁴⁾ Use caution not to exceed vibration resistance limits while ultrasonically cleaning. Contact Clare, Inc.

Engineering for more details/ recommendations

⁽⁵⁾ 15 ampere turn minimum

Mechanical Dimensions

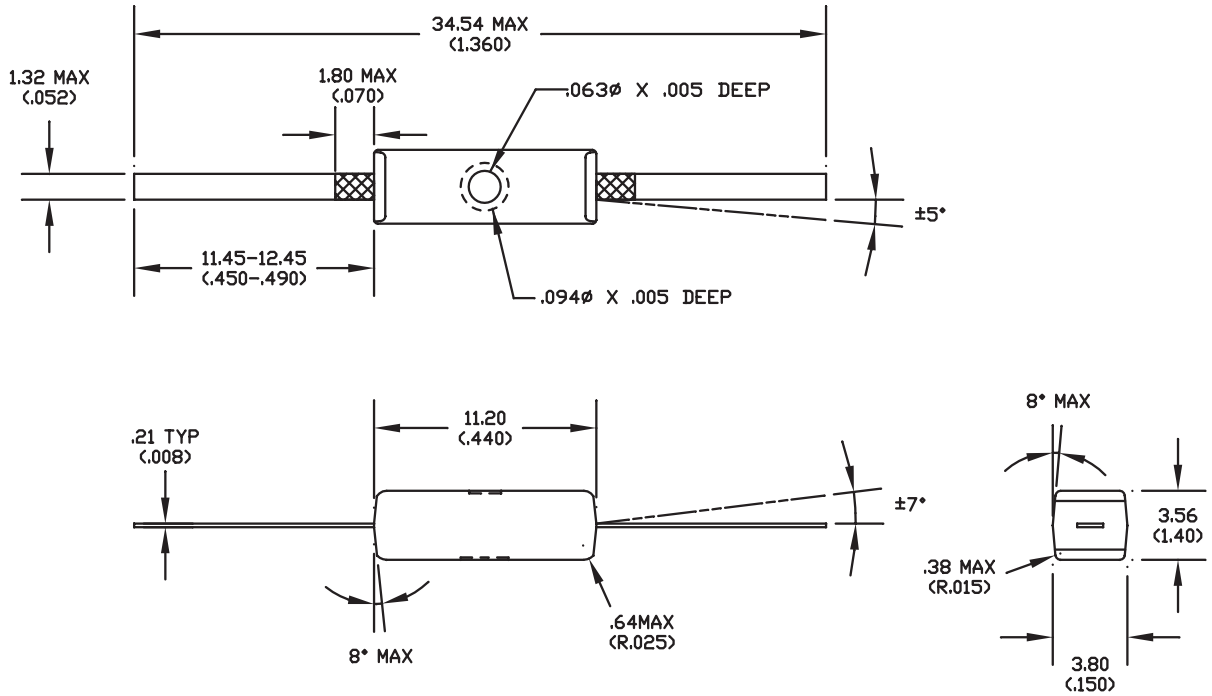

- NOTES:
1. SURFACE - MATTE FINISH VDI 18-21
 2.  AREA NOT SUITABLE FOR SOLDERING

Dimensions
mm
(inches)



CLARE

Worldwide Sales Offices

CLARE LOCATIONS

Clare Headquarters
78 Cherry Hill Drive
Beverly, MA 01915
Tel: 1-978-524-6700
Fax: 1-978-524-4900
Toll Free: 1-800-27-CLARE

Clare Switch Division
4315 Earth City Expressway
St. Louis, MO 63045
Tel: 1-314-770-1832
Fax: 1-314-770-1812

Clare Micronix Division
145 Columbia
Aliso Viejo, CA 92656-1490
Tel: 1-949-831-4622
Fax: 1-949-831-4628

SALES OFFICES

AMERICAS

Americas Headquarters

Clare
78 Cherry Hill Drive
Beverly, MA 01915
Tel: 1-978-524-6700
Fax: 1-978-524-4900
Toll Free: 1-800-27-CLARE

Eastern Region

Clare
P.O. Box 856
Mahwah, NJ 07430
Tel: 1-201-236-0101
Fax: 1-201-236-8685
Toll Free: 1-800-27-CLARE

Central Region

Clare Canada Ltd.
3425 Harvester Road, Suite 202
Burlington, Ontario L7N 3N1
Tel: 1-905-333-9066
Fax: 1-905-333-1824

Western Region

Clare
1852 West 11th Street, #348
Tracy, CA 95376
Tel: 1-209-832-4367
Fax: 1-209-832-4732
Toll Free: 1-800-27-CLARE

Canada

Clare Canada Ltd.
3425 Harvester Road, Suite 202
Burlington, Ontario L7N 3N1
Tel: 1-905-333-9066
Fax: 1-905-333-1824

EUROPE

European Headquarters

CP Clare nv
Bampslaan 17
B-3500 Hasselt (Belgium)
Tel: 32-11-300868
Fax: 32-11-300890

France

Clare France Sales
Lead Rep
99 route de Versailles
91160 Champlan
France
Tel: 33 1 69 79 93 50
Fax: 33 1 69 79 93 59

Germany

Clare Germany Sales
ActiveComp Electronic GmbH
Mitterstrasse 12
85077 Manching
Germany
Tel: 49 8459 3214 10
Fax: 49 8459 3214 29

Italy

C.L.A.R.E.s.a.s.
Via C. Colombo 10/A
I-20066 Melzo (Milano)
Tel: 39-02-95737160
Fax: 39-02-95738829

Sweden

Clare Sales
Comptronic AB
Box 167
S-16329 Spånga
Tel: 46-862-10370
Fax: 46-862-10371

United Kingdom

Clare UK Sales
Marco Polo House
Cook Way
Bindon Road
Taunton
UK-Somerset TA2 6BG
Tel: 44-1-823 352541
Fax: 44-1-823 352797

ASIA PACIFIC

Asian Headquarters

Clare
Room N1016, Chia-Hsin, Bldg II,
10F, No. 96, Sec. 2
Chung Shan North Road
Taipei, Taiwan R.O.C.
Tel: 886-2-2523-6368
Fax: 886-2-2523-6369

<http://www.clare.com>

Clare cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in this Clare product. No circuit patent licenses nor indemnity are expressed or implied. Clare reserves the right to change the specification and circuitry, without notice at any time. The products described in this document are not intended for use in medical implantation or other direct life support applications where malfunction may result in direct physical harm, injury or death to a person.

Specification: PB-CM10-R1
©Copyright 2001
Molded Ultra-Mini DYAD™, Molded Mini DYAD™, and
Molded DYAD® are trademarks of Clare, Inc.
All rights reserved. Printed in USA.
4/23/01