


BZV55C-G/ZMM55C-G-SERIES
ZENER DIODES

Zener Voltage: 2.4-180V Peak Pulse Power: 500mW

MINI MELF

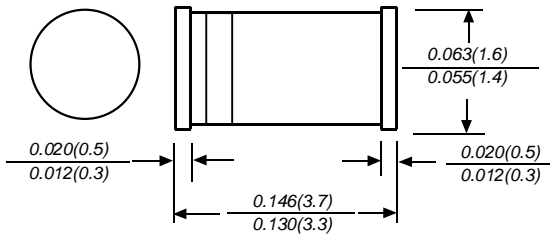

FEATURE

- ◆ Low zener impedance
- ◆ Low regulation factor
- ◆ Glass passivated junction
- ◆ High temperature soldering guaranteed:
260°C/10S at terminals
- ◆ Green Products in Compliance with the RoHS Directive

MECHANICAL DATA

Case: MINI MELF molded glass body

Terminals: Plated axial leads, solderable per MIL-STD 750, method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.002 ounce, 0.05 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	VALUE	UNITS
Zener Current see Table Characteristics			
Power Dissipation at Tamb=25°C(Note 1)	P _{tot}	500	mW
Junction Temperature	T _j	200	°C
Storage Temperature Range	T _{STG}	-65 to + 200	°C
Thermal resistance junction ambient(Note 1)	R _{θJA}	0.3	K/mW
Forward voltage at I _F =100mA	V _F	1.0	V


Note 1: Valid provided that leads at a distance of 10mm from case are kept at ambient temperature

ELECTRICAL CHARACTERISTICS (at TA=25°C unless otherwise noted)


Device Type	Nominal Zener Voltage Vz@Izr		Test Current Izr mA	Maximum Zener Impedance			Maximum Reverse Leakage Current		Typical Temperature Coefficient (%/°C)	Maximum Regulator Current IzM mA
	Min	Max		Zzt@Izr	Zzk@Izk	Izk	IR	@VR		
				Ohms	Ohms	mA	µA	Volts		
BZV/ZMM55C2V4-G	2.28	2.56	5.0	85	600	1.0	50	1.0	-0.085	155
BZV/ZMM55C2V7-G	2.5	2.9	5.0	85	600	1.0	10	1.0	-0.080	135
BZV/ZMM55C3V0-G	2.8	3.2	5.0	85	600	1.0	4.0	1.0	-0.075	125
BZV/ZMM55C3V3-G	3.1	3.5	5.0	85	600	1.0	2.0	1.0	-0.070	115
BZV/ZMM55C3V6-G	3.4	3.8	5.0	85	600	1.0	2.0	1.0	-0.065	105
BZV/ZMM55C3V9-G	3.7	4.1	5.0	85	600	1.0	2.0	1.0	-0.060	95
BZV/ZMM55C4V3-G	4.0	4.6	5.0	75	600	1.0	1.0	1.0	±0.055	90
BZV/ZMM55C4V7-G	4.4	5.0	5.0	60	600	1.0	0.5	1.0	±0.030	85
BZV/ZMM55C5V1-G	4.8	5.4	5.0	35	550	1.0	0.1	1.0	±0.030	80
BZV/ZMM55C5V6-G	5.2	6.0	5.0	25	450	1.0	0.1	1.0	+0.038	70
BZV/ZMM55C6V2-G	5.8	6.6	5.0	10	200	1.0	0.1	2.0	+0.045	64
BZV/ZMM55C6V8-G	6.4	7.2	5.0	8	150	1.0	0.1	3.0	+0.050	58
BZV/ZMM55C7V5-G	7.0	7.9	5.0	7	50	1.0	0.1	5.0	+0.058	53
BZV/ZMM55C8V2-G	7.7	8.7	5.0	7	50	1.0	0.1	6.2	+0.062	74
BZV/ZMM55C9V1-G	8.5	9.6	5.0	10	50	1.0	0.1	6.8	+0.068	43
BZV/ZMM55C10-G	9.4	10.6	5.0	15	70	1.0	0.1	7.5	+0.075	40
BZV/ZMM55C11-G	10.4	11.6	5.0	20	70	1.0	0.1	8.2	+0.076	36
BZV/ZMM55C12-G	11.4	12.7	5.0	20	90	1.0	0.1	9.1	+0.077	32
BZV/ZMM55C13-G	12.4	14.1	5.0	26	110	1.0	0.1	10	+0.079	29
BZV/ZMM55C15-G	13.8	15.6	5.0	30	110	1.0	0.1	11	+0.082	27
BZV/ZMM55C16-G	15.3	17.1	5.0	40	170	1.0	0.1	12	+0.083	24
BZV/ZMM55C18-G	16.8	19.1	5.0	50	170	1.0	0.1	13	+0.085	21
BZV/ZMM55C20-G	18.8	21.2	5.0	55	220	1.0	0.1	15	+0.086	20
BZV/ZMM55C22-G	20.8	23.3	5.0	55	220	1.0	0.1	16	+0.087	18
BZV/ZMM55C24-G	22.8	25.6	5.0	80	220	1.0	0.1	18	+0.088	16
BZV/ZMM55C27-G	25.1	28.9	5.0	80	220	1.0	0.1	20	+0.090	14
BZV/ZMM55C30-G	28	32	5.0	80	220	1.0	0.1	22	+0.091	13
BZV/ZMM55C33-G	31	35	5.0	80	220	1.0	0.1	24	+0.092	12
BZV/ZMM55C36-G	34	38	5.0	80	220	1.0	0.1	27	+0.093	11
BZV/ZMM55C39-G	37	41	2.5	90	500	0.5	0.1	30	+0.094	10
BZV/ZMM55C43-G	40	46	2.5	90	600	0.5	0.1	33	+0.095	9.2
BZV/ZMM55C47-G	44	50	2.5	110	700	0.5	0.1	36	+0.095	8.5
BZV/ZMM55C51-G	48	54	2.5	125	700	0.5	0.1	39	+0.096	7.8
BZV/ZMM55C56-G	52	60	2.5	135	1000	0.5	0.1	43	+0.096	7.0
BZV/ZMM55C62-G	58	66	2.5	150	1000	0.5	0.1	47	+0.096	6.4
BZV/ZMM55C68-G	64	72	2.5	200	1000	0.5	0.1	51	+0.096	5.9
BZV/ZMM55C75-G	70	80	2.5	250	1500	0.5	0.1	56	+0.096	5.3
BZV/ZMM55C82-G	77	87	2.5	300	2000	0.5	0.1	62	+0.096	4.8
BZV/ZMM55C91-G	85	96	1.0	450	5000	0.1	0.1	68	+0.096	4.4
BZV/ZMM55C100-G	94	106	1.0	450	5000	0.1	0.1	75	+0.096	4.0
BZV/ZMM55C110-G	104	116	1.0	600	5000	0.1	0.1	82	+0.096	3.6
BZV/ZMM55C120-G	114	127	1.0	800	5000	0.1	0.1	91	+0.096	3.3
BZV/ZMM55C130-G	124	141	1.0	1000	5000	0.1	0.1	100	+0.096	3.0
BZV/ZMM55C150-G	138	156	1.0	1200	5000	0.1	0.1	110	+0.096	2.6
BZV/ZMM55C160-G	153	171	1.0	1500	5000	0.1	0.1	120	+0.096	2.5
BZV/ZMM55C180-G	168	191	1.0	1800	5000	0.1	0.1	130	+0.096	2.2
BZV/ZMM55C188-G	188	212	1.0	2000	5000	0.1	0.1	150	+0.096	2.0

RATINGS AND CHARACTERISTIC CURVES BZV/ZMM55C-G-SERIES

Breakdown characteristics

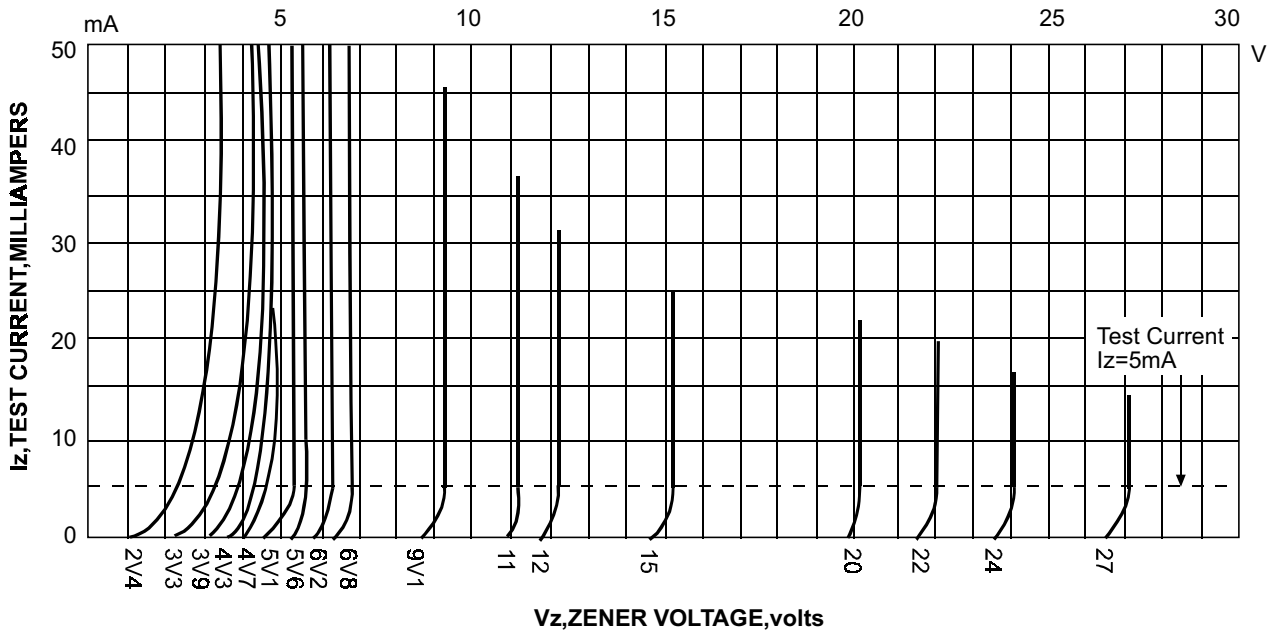

Admissible power dissipation versus ambient temperature
Valid provided that leads are kept at ambient temperature at a distance of 10mm from case

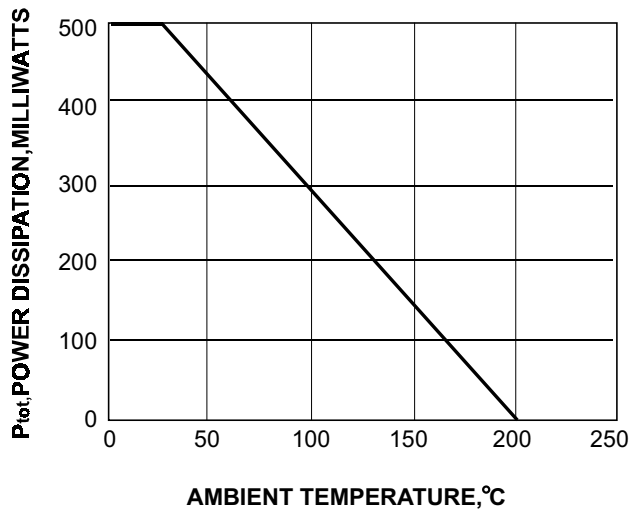

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.