

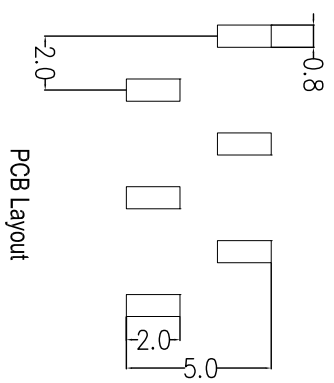
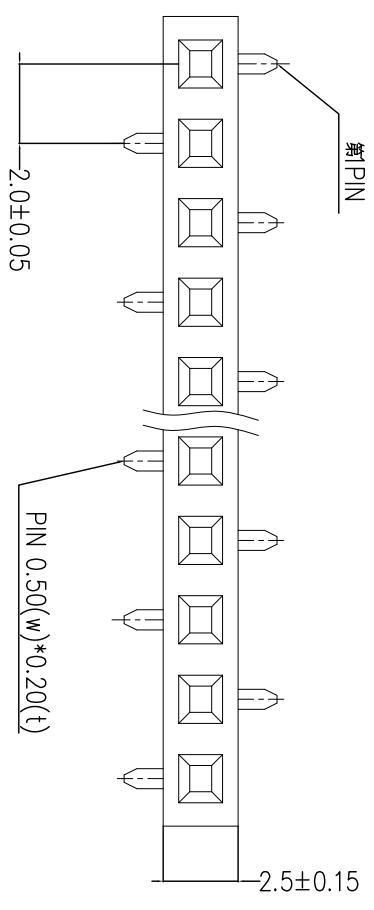


| REV. | DESCRIPTION | DATE |
|------|-------------|------|
|      |             |      |
|      |             |      |

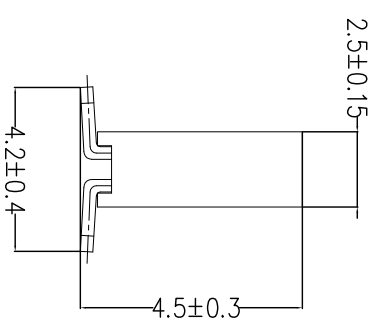

PCB Layout

- NOTE:**
- Material:**
1. Housing: Polyester, UL 94V-0.
  2. Terminal: Copper alloy. Gold-plated.
- Electrical:**
1. Current rating: 2 Amp.
  2. Contact resistance: 30mΩ Max.
  3. Insulator resistance: 3000MΩ Min.
  4. Dielectric withstand: AC 500 V.
  5. Temperature: -40°C ~ +105°C
- Available pins: 02~50 contacts

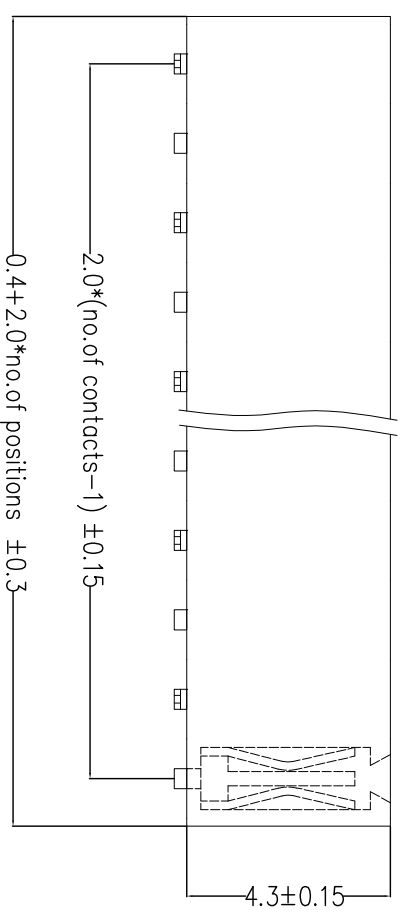

| TOLERANCE | DRAWER                          |
|-----------|---------------------------------|
| .X ±.XX   | <i>Chiu Chuan Siau</i>          |
| .XX ±.XX  | CHECK <i>Shi Jeng Siau</i>      |
| .XXX ±.XX | DESIGNED <i>Chiu Chuan Siau</i> |
|           | APPROVAL <i>Shaw Jeng Siau</i>  |



UNITS : mm

| SCALE | SIZE |
|-------|------|
| FREE  | A4   |

**SynLight** 日亮電子科技有限公司  
Sun-light Electronic Technologies Inc.

NAME  
2.0mm Female Header H:4.3 W:2.5 SMT type

| PART NO.         | DRAW NO.      |
|------------------|---------------|
| F200-H43-SSMT-XX | F200-H43-SSMT |
| SHEET 1 OF 1     | REV.          |

SCALE FREE SIZE A4 SHEET 1 OF 1 REV. A