view schown without plastic pin and grounding

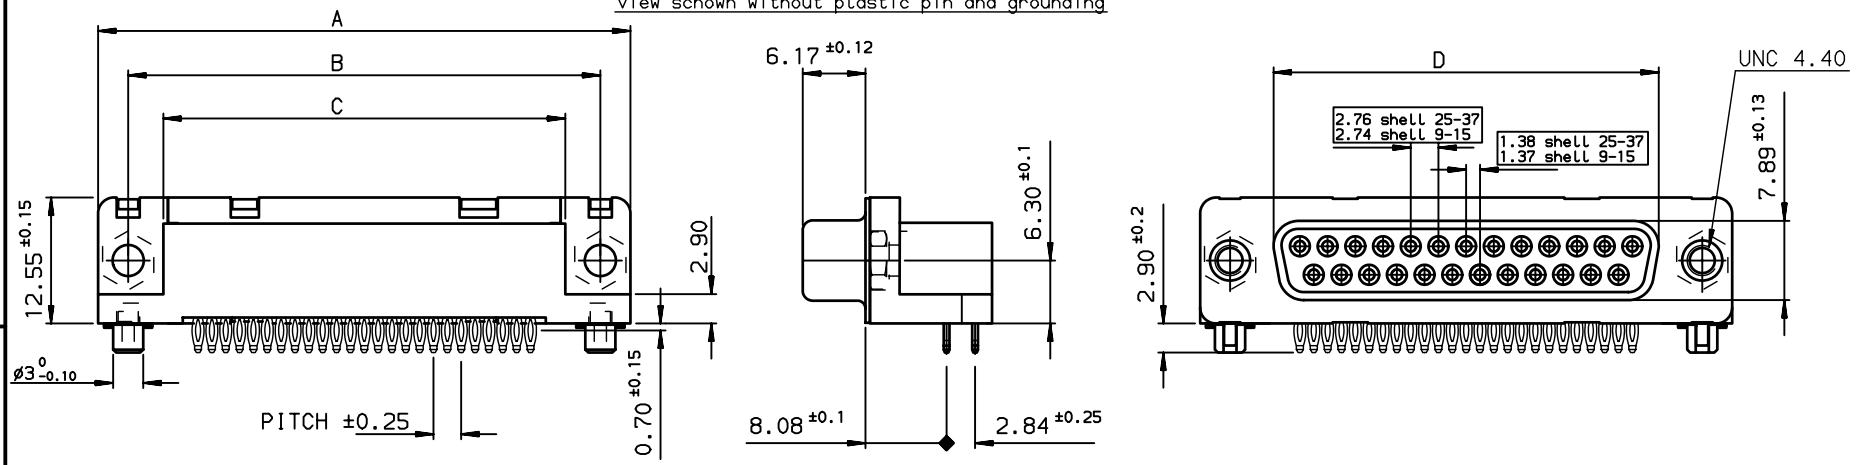

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.25 mm)

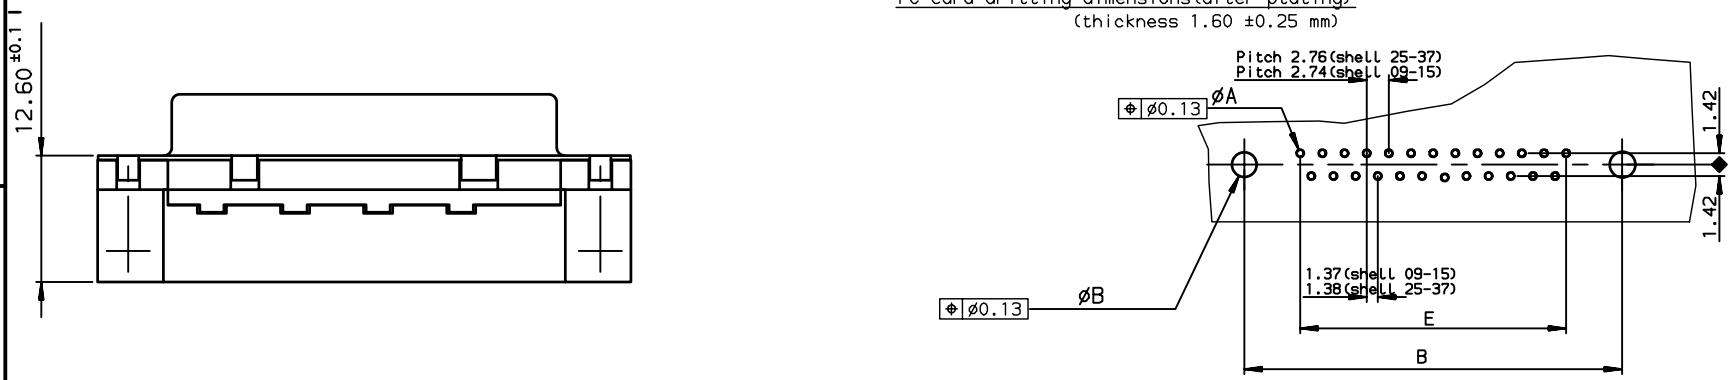

Detail of grounding strip



SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C6GX3F
15	39.14	33.32	26.32	24.54	19.18	D15S80C6GX3F
25	53.03	47.04	40.04	38.25	33.12	D25S80C6GX3F
37	69.32	63.50	56.50	54.71	49.68	D37S80C6GX3F
						for 500 matings

NOTE 1

MATERIAL and PLATINGS

Contacts:0.75µ min gold over nickel on active area
tin lead over nickel on termination

Shells:steel,nickel 2 to 9µ over copper 3 to 5µ plating
Nuts:steel,nickel 2 to 4µ plating
grounding device:brass, 1µ min nickel

NOTE 2

For other general characterisitics,excepted chacteristics in note 1
see drawing C01-8646-0001

rev	ecn no	dr	date
A	LS08-0084	MPE	2008/03/25
B	LS08-0097	MPE	2008/04/07
C	LS08-0211	MPE	2008/05/06
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

European Views

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dr	PESSON	2008/03/25
Eng	PESSON	2008/03/25
Chr	LEGARE	2008/03/25
Appr	LEGARE	2008/03/25

ANGULAR: 0.XX° ±2°

LINEAR: 0.X ±0.1; 0.XX ±0.1; 0.XXX ±0.1

Product family: D-SUB

projection | mm

size A3 | Scale 2

ECN LS08-0211

Spec ref -

title: FEMALE CONNECTOR DELTA D
RA PRESS-FIT USA SPECIF 3F

dwg no C-8646-0906 | Rev. C

catalog no -

CUSTOMER | sheet 1 of 1

REV F - 2006-04-17

Copyright FCI.

PDM: Rev:C STATUS:Released Printed: Jan 18, 2011