
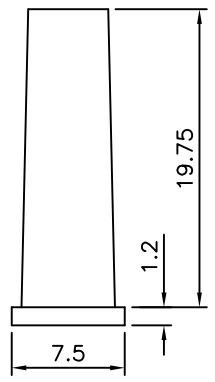
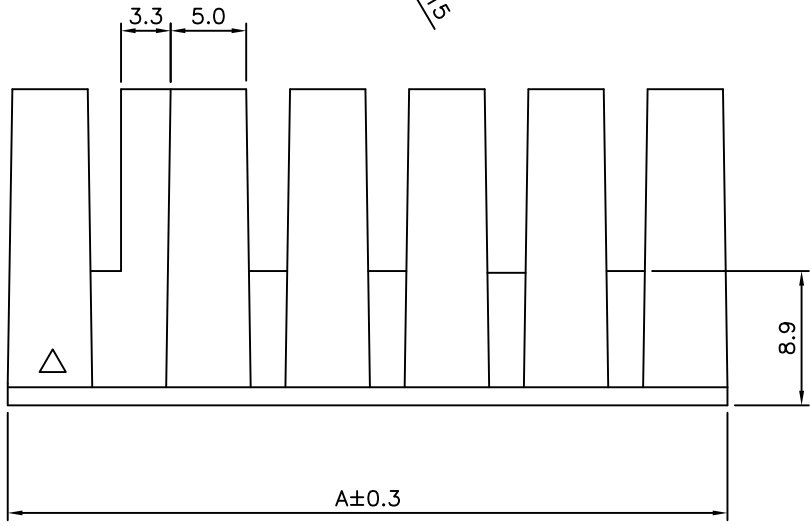


SPECIFICATION:
 Voltage Rating:250V AC/DC
 Current Rating:7AMP AC/DC.
 Withstanding Voltage:1,500V AC/Minute.
 Contact Resistance:20Milliohms Max
 Insulator Resistance:1000Megohms Min
 Temperature Range:-25°C To +85°C
 Base:Nylon 66 UL94V-0
 Q'ty:1,000PCS./Bag

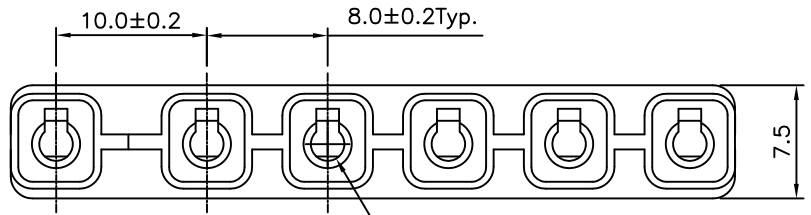

Poles	A
1	6.00
2	16.00
3	24.00
4	32.00
5	40.00
6	48.00

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.2 .XXX ±0.1
PART No. LVXXH		MEI		
DRAWING No. LVXXH		CHECKED BY HZF		
SCALE NONE		DRAWING BY PEGA		
REV.	A0	UNIT	mm	NO. REV.

△ A0	NEW RELEASE	HZF	03/10/2007
NO. REV.	REVISIONS	CHK	DATE