

HCMOS 3.2x2.5mm 2.5V SMD Oscillator



Model: F340 Series

RoHS Compliant / Pb Free

Rev. 10/21/2008

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



FEATURES

- 2.5V Operation
- HCMOS Output
- Low Power Consumption
- Standby Function
- Tape and Reel (2,000 pcs. STD)

XpressO[®] Equivalent
FXO-HC32

Why XpressO?
Lower Cost, Faster Delivery, Low Jitter!


| • PART NUMBER SELECTION Learn More - Internet Required | | | | |
|--|--------------|----------------------------------|----------------------------|-----------------------|
| Part Number | Model Number | Frequency Stability ¹ | Operating Temperature (°C) | Frequency Range (MHz) |
| 639-Frequency-xxxxx | F340 | ±100PPM | -10 ~ +70 | 0.625 ~ 75.000 |
| 643-Frequency-xxxxx | F340R | ±100PPM | -40 ~ +85 | 0.625 ~ 75.000 |
| 640-Frequency-xxxxx | F345 | ±50PPM | -10 ~ +70 | 0.625 ~ 75.000 |
| 644-Frequency-xxxxx | F345R | ±50PPM | -40 ~ +85 | 0.625 ~ 75.000 |
| 641-Frequency-xxxxx | F346 | ±25PPM | -10 ~ +70 | 0.625 ~ 75.000 |
| 645-Frequency-xxxxx | F346R | ±25PPM* | -40 ~ +85 | 1.800 ~ 50.000 |
| 642-Frequency-xxxxx | F348 | ±20PPM* | -10 ~ +70 | 1.800 ~ 50.000 |

| • ELECTRICAL CHARACTERISTICS | |
|----------------------------------|------------------------------|
| PARAMETERS | MAX (unless otherwise noted) |
| Frequency Range (Fo) | 0.625 ~ 75.000 MHz |
| Storage Temperature Range (Tstg) | -55°C ~ +125°C |
| Supply Voltage (VDD) | 2.5V ± 5% |
| Input Current (IDD) | |
| 0.625 ~ 20.000 Mhz | 5mA |
| 20.000+ ~ 40.000 Mhz | 9mA |
| 40.000+ ~ 60.000 Mhz | 11mA |
| 60.000+ ~ 75.000 Mhz | 14mA |
| Output Symmetry (50% VDD) | 45% ~ 55% |
| Rise Time (10% ~ 90% VDD) (Tr) | 6nS |
| Fall Time (90% ~ 10% VDD) (Tf) | 6nS |
| Output Voltage (VOL) | 10% VDD |
| (VOH) | 90% VDD Min |
| Output Current (IOL) | 2mA Min |
| (IOH) | -2mA Min |
| Output Load (HCMOS) | 15pF |
| Standby Current | 10µA |
| Start-up Time (Ts) | 5mS |
| Output Disable Time ² | 150nS |
| Output Enable Time ² | 5mS |
| Maximum Solder Temp / Time | 260°C / 10 Seconds |
| Moisture Sensitivity Level (MSL) | 1 |
| Termination Finish | Au |

¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration. *Excludes Shock/Vibration

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open. Note: A 0.01µF bypass capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply line noise.

Drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

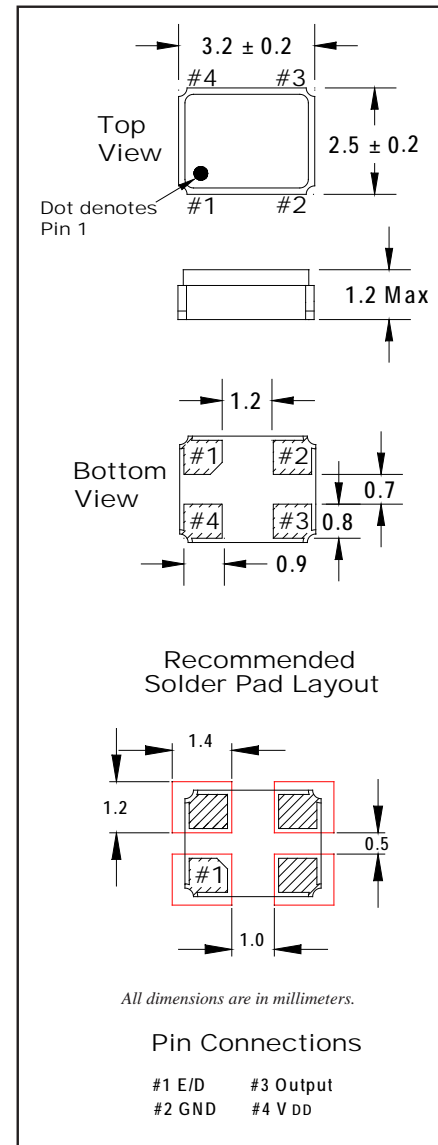

| • ENABLE / DISABLE FUNCTION | |
|-----------------------------|----------------|
| INH (Pin 1) | OUTPUT (Pin 3) |
| OPEN ² | ACTIVE |
| '1' Level VIH ≥ 70% VDD | ACTIVE |
| '0' Level VIL ≤ 30% VDD | High Z |

HCMOS 3.2x2.5mm 2.5V SMD Oscillator



Model: F340 Series

RoHS Compliant / Pb Free

Rev. 10/21/2008

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



XpressO® Equivalent
FXO-HC32

Why XpressO?
Lower Cost, Faster Delivery, Low Jitter!

| • TAPE SPECIFICATIONS (millimeters) | | | | | | | |
|-------------------------------------|------|-----|-----|-----|-----|-----|--------------|
| MODEL | A | B | C | D | E | F | STD Reel QTY |
| F340 Series | ∅1.5 | 4.0 | 4.0 | 3.5 | 8.0 | 1.4 | 2,000 |

| • REEL SPECIFICATIONS (millimeters) | | | | | | | |
|-------------------------------------|-----|-----|-----|-----|------|-----|-----|
| MODEL | G | H | I | J | K | L | M |
| F340 Series | 2.0 | ∅13 | ∅21 | ∅60 | ∅180 | 9.0 | 1.2 |

