



REV.	DESCRIPTION	DATE

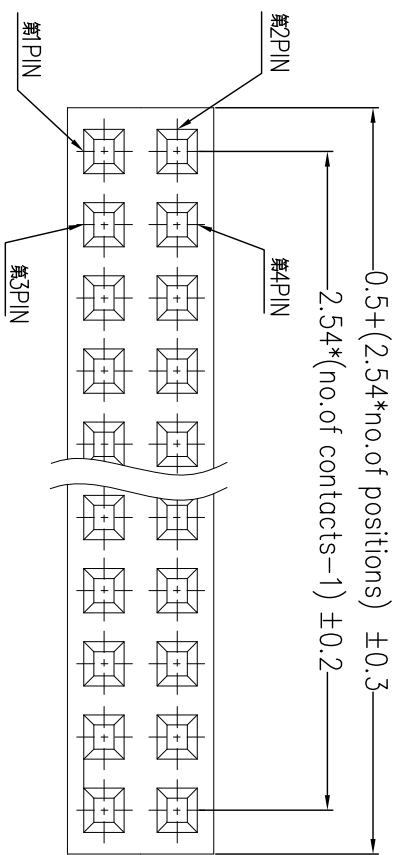

PCB Hole Layout

**NOTE:**



**Material:**

1. Housing: Polyester, UL94V-0.
2. Terminal: Copper alloy. Gold-plated.

**Electrical:**

1. Current rating: 3 Amp.
2. Contact resistance: 30mΩ Max.
3. Insulator resistance: 5000MΩ Min.
4. Dielectric withstand: AC 1000 V.
5. Temperature: -40°C ~ +105°C

Available pins: 04~80 contacts

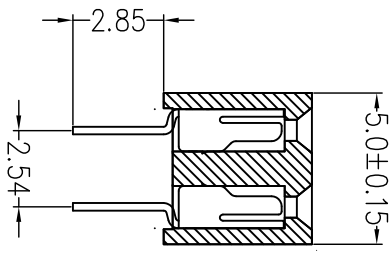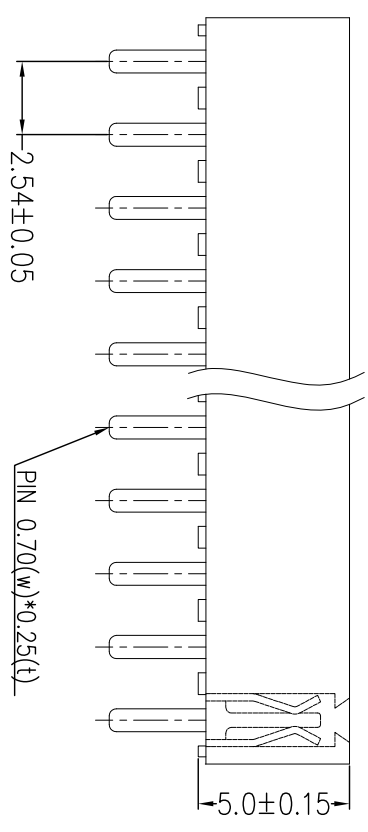

<p><b>TOLERANCE</b></p> <p>X ±.XX</p> <p>.XX ±.XX</p> <p>.XXX ±.XX</p>		<p><b>DRAWER</b></p> <p><i>Qilin Qian Qiu</i></p>	
<p><b>UNITS : mm</b></p>		<p><b>CHECK</b></p> <p><i>Shi Jiong Shu</i></p>	
<p><b>DESIGNED</b></p> <p><i>Qilin Qian Qiu</i></p>		<p><b>NAME</b></p> <p><b>SynLight</b> 日亮電子科技有限公司</p> <p><i>Sun-light Electronic Technologies Inc.</i></p>	
<p><b>APPROVAL</b></p> <p><i>Shao Teng Shu</i></p>		<p><b>2.54mm Female Header H:5.0 W:5.0 180°</b></p> <p>雙排 Double row</p>	
<p><b>DATE</b></p> <p>12 / 10 / 2010</p>		<p><b>PART NO.</b></p> <p>F2540-H50-DDIP-XX</p>	
<p><b>SCALE</b></p> <p>FREE</p>		<p><b>DRAWING NO.</b></p> <p>F2540-H50-DDIP</p>	
<p><b>SIZE</b></p> <p>A4</p>		<p><b>REV.</b></p> <p> </p>	
<p><b>SHEET</b></p> <p>1 OF 1</p>		<p><b>A</b></p>	