

Edition: 05/2002 - subject to change  
 Status: preliminary

## PLANON 15,0"/868

### Technical Information for Systems:

Lamp		Inverter/ECG		Diffuser Set
<b>PLANON 15,0"/868 2</b>	<b>+</b>	<b>QT PLANON 15,0"/50/24 2</b>	<b>+</b>	<b>D PLANON 15,0"/A</b>
<b>PLANON 15,0"/868 6</b>	<b>+</b>	<b>QT PLANON 15,0"/40/24 6</b>	<b>+</b>	<b>D PLANON 15,0"/A</b>


Explanations/Nomenclature:

Lamp: PLANON lamp diagonal/colour code combinable ECG type(s)

ECG: QT PLANON lamp diagonal/system power/supply voltage ECG type


### Product Features PLANON®

- **flat, mercury free discharge lamp**  
for extremely flat fixtures < 20 mm
- **lamp size not limited by physical constraints**  
(5 inch to 30 inch)
- **unique lighting power**  
wide viewing and illumination angle  
constant luminance from centre to edge
- **lamp with integrated reflector**
- **mercury free**  
luminous flux not related to temperature (-30°C to +85°C)  
instant light with high luminance  
no ramp-on/ramp-off effects (power save mode)  
no hazardous waste
- **extreme long lamp life, up to 100,000h**  
(meantime to half brightness/MTTH)  
absence of damage susceptible electrodes  
much less severe darkening
- **switching cycles show no influence on lifetime**
- **soft illumination with virtually no shadow**
- **dimnable down to 20%**

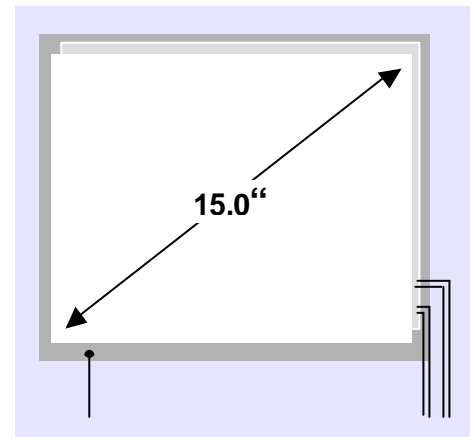

### Product Features QT PLANON


- **designed for optimising PLANON® lamp performance**
- **suitable for applications in which lamps are switched on and off frequently**
- **reliable system start-up at low temperatures**
- **safe shutdown of the power supply to defective lamps**
- **electromagnetic compatibility**
- **dimming interface**

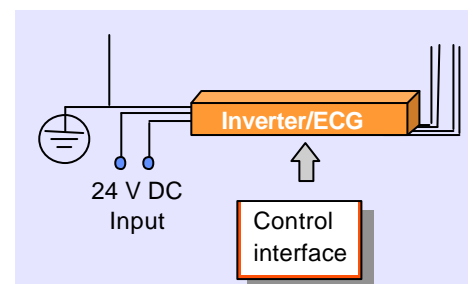


Edition : 05/2002 - subject to change  
 Status: preliminary

## PLANON 15,0"/868

### Technical Data

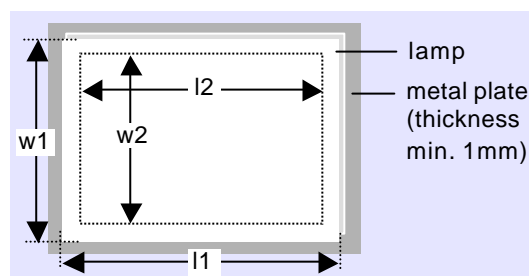

	PLANON 15,0"/868 6	PLANON 15,0"/868 2
Outer dimensions (l1 x w1 x h)	324 mm x 258 mm x 8,5 mm	324 mm x 258 mm x 8,5 mm
Illuminated area (l2 x w2)	308 mm x 232 mm	308 mm x 232 mm
Weight	950 g	975 g
Colour rendering	Ra86	Ra86
Colour temperature	6800 K	6800 K
Number of cables	4	4
Minimum length of cable	420 mm	395 mm
Contact between lamp and inverter/ECG	plug	clamps
<b>matched with inverter / ECG</b>	<b>QT PLANON 15,0"/40/24 6</b>	<b>QT PLANON 15,0"/50/24 2</b>
Centre luminance typical after burn in (100h)	4400 cd/m <sup>2</sup>	5900 cd/m <sup>2</sup>
Centre luminance typical after burn in (100h) with standard diffuser set	3700 cd/m <sup>2</sup>	5100 cd/m <sup>2</sup>
Luminous flux	900 lm	1250 lm
System wattage	40 W	56,4 W
Line current	1,67 A	2,35 A
System efficiency	7,9 cd/W	7,8 cd/W
System lifetime @ 20% fraction failure	50,000 h	50,000 h
Maximum distance between lamp and ECG	50 cm	50 cm



	QT PLANON 15,0"/40/24 6	QT PLANON 15,0"/50/24 2
Linear dimming range	100...20%	*100...50%
Supply voltage	24V DC	24V DC
Voltage range	20V...30V DC	20V...30V DC
Operating frequency	40...80 kHz	40...80 kHz
Ambient temperature range ta	-20°C...60°C, 80% RH	-20...70°C; 80% RH
Control temperature tc max	tbd	tbd
Dimensions (l x w x h)	200 mm x 40 mm x 20 mm	280 mm x 42 mm x 29 mm
Weight	132 g	350 g

\*For making use of the dimming capability of this type a separate potentiometer is necessary.

Safety	acc. to EN 60950 / EN 60950 (in preparation)
Radio interference suppression	acc. to EN 55022, Class B (in preparation)
Immunity to interference	acc. to EN 55024 (in preparation)