

**Technical Data**

**S1566 Series**




**Description**

A high performance, low jitter, LVPECL voltage controlled crystal oscillator, designed primarily for use in phase locked loops, Sonet, ATM and SDH network/switching applications. Complementary outputs are Motorola 10KE compatible and can be enabled/disabled. Device is packaged in a 14-pin DIP compatible, hermetic metal package with thru-hole and true SMD configurations. Case is grounded to Pin 7 to reduce EMI.

**Applications & Features**

- 3.3V LVPECL
- ~ True SMD adapter option
- ~ Output Enable/Disable feature
- Complementary Output
- High-frequency SaRonix proprietary fundamental crystals for exceptional jitter performance
- Covers a wide range of telecommunication applications such as Sonet, SDH and ATM
- $\pm 50$ ppm minimum APR\*

**Output Waveforms**




<b>Frequency Range:</b>	622.08 MHz to 666.5143 MHz
<b>Frequency Stability:</b>	$\pm 20, \pm 25, \pm 32$ or $\pm 50$ ppm over all conditions: operating temperature, rated input (supply) voltage change, load change, shock and vibration.
vs. Aging:	$\pm 7.5$ ppm, 10 years @ 25°C average ambient operating temperature
Room Temp (RMT):	center frequency $V_C = 1.65V \pm 0.35V$
<b>Temperature Range:</b>	
Operating:	0 to +70°C, 0 to +85°C, -40 to +85°C
Storage:	-55°C to +105°C
<b>Supply Voltage (VCC):</b>	3.3V $\pm 5\%$
<b>Supply Current:</b>	80mA max
<b>Output Drive:</b>	
Symmetry:	45/55% max @ 50% waveform
Rise & Fall Times:	350ps max @ 20 to 80% waveform
Logic 0:	V <sub>CC</sub> -1.620 max
Logic 1:	V <sub>CC</sub> -1.025 min
Load:	50Ω to V <sub>CC</sub> -2V (output requires termination)
Period Jitter RMS:	0.1ps in 12kHz to 1MHz Freq. Band (computed from Phase Noise) 40ps peak-to-peak max (measured using DSO)
<b>Pull Characteristics:</b>	
Input Impedence (Pin 1):	50kΩ min
Modulation Bandwidth:	10kHz min
Pullability:	$\pm 50$ ppm min (initially) APR* ( $V_C: 1.65V \pm 1.35V$ )
Control Voltage:	0.3V to 3V
Transfer Function:	Frequency increases when Control Voltage increases
Monotonic Linearity:	15%
Center Control Voltage:	1.65V
<b>Enable/Disable Control:</b>	
Output Enable Voltage (Pin 2):	$\leq V_{CC} - 1.475V$ or open
Output Disable Voltage (Pin 2):	$\geq V_{CC} - 1.165V$
Q Output Disabled to a fixed level of Logic 1	
$\bar{Q}$ Output Disabled to a fixed level of Logic 0	
<b>Mechanical:</b>	
Shock:	MIL-STD-883, Method 2002, Condition B
Solderability:	MIL-STD-883, Method 2003
Terminal Strength:	MIL-STD-883, Method 2004, Conditions B2
Vibration:	MIL-STD-883, Method 2007, Condition A
Solvent Resistance:	MIL-STD-202, Method 215
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition B (I or J for gull-wing/SMD)
<b>Environmental:</b>	
Gross Leak Test:	MIL-STD-883, Method 1014, Condition C
Fine Leak Test:	MIL-STD-883, Method 1014, Condition A2
Thermal Shock:	MIL-STD-883, Method 1011, Condition A
Moisture Resistance:	MIL-STD-883, Method 1004

\*APR = (VCXO Pull relative to specified Output Frequency) – (VCXO Freq. Stability) – (Aging)

### Technical Data

S1566 Series


#### Package Details

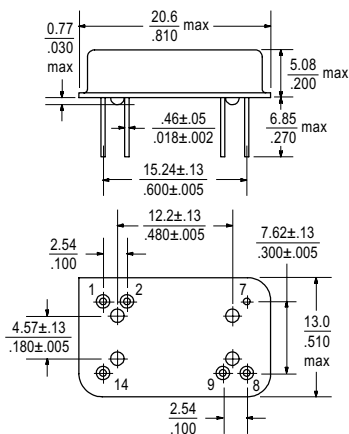

#### Pin Functions:

- S1566
- |                        |                        |
|------------------------|------------------------|
| Pin 1: Control Voltage | Pin 8: Q Output        |
| Pin 2: Enable / NC     | Pin 9: Q Output        |
| Pin 7: GND / Case      | Pin 14: Supply Voltage |


#### Standard Marking Format



Scale: None (Dimensions in  $\frac{\text{mm}}{\text{inches}}$ )

**\* Package with true SMD adapter is not shown, please see separate data sheet.**

#### Part Numbering Guide

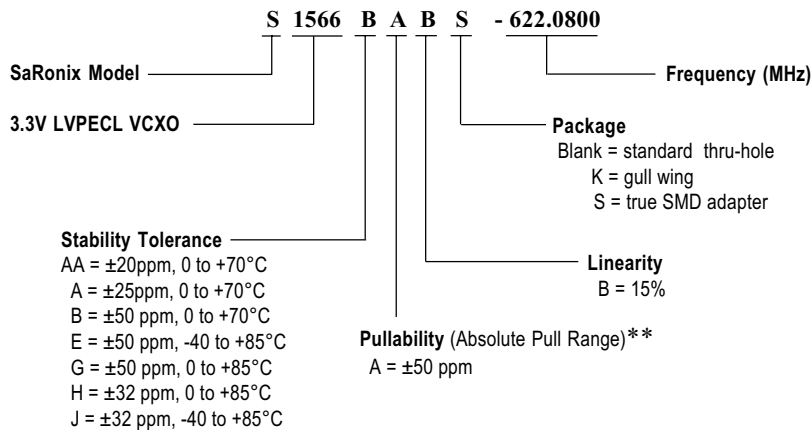

\*\*APR = (VCXO Pull relative to specified Output Frequency) – (VCXO Freq. Stability)– (Aging)

All specifications are subject to change without notice.

DS-216 REV 02