

NTC Thermistors

Surface Mount Chip




FEATURES

- Top and bottom surface terminations.
 - High-density monolithic ceramic construction.
 - Allows design flexibility for use with hybrid circuitry.
 - Model W is a thermistor die with silver conductors fired on the top and bottom surfaces. The bottom surface can be reflow soldered or conductive epoxied directly to a substrate bonding pad and the top surface wire bonded to complete the circuit connection.

STANDARD ELECTRICAL SPECIFICATIONS AND DIMENSIONAL CONFIGURATIONS

$\pm 10\%$, $\pm 5\%$ R25 Tolerance

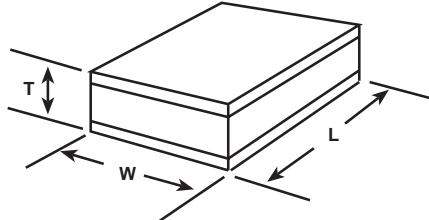

[Numbers in brackets indicate millimeters]

R25 (Ohms)	PART NUMBER	CURVE NUMBER	L	W	T (Nominal)
10.0M	12W1004	12	0.043 ± 0.004 [10.1 ± 0.10]	0.043 ± 0.004 [10.1 ± 0.10]	0.020 [0.51]
500,000	12W5003	12	0.053 ± 0.004 [10.4 ± 0.10]	0.053 ± 0.004 [10.4 ± 0.10]	0.016 [0.41]
250,000	12W2503	12	0.075 ± 0.006 [10.9 ± 0.15]	0.075 ± 0.006 [10.9 ± 0.15]	0.016 [0.41]
200,000	7W2003	7	0.041 ± 0.004 [10.0 ± 0.10]	0.041 ± 0.004 [10.0 ± 0.10]	0.033 [0.84]
100,000	12W1003	12	0.119 ± 0.008 [30.0 ± 0.20]	0.119 ± 0.008 [30.0 ± 0.20]	0.016 [0.41]
100,000	8W1003	8	0.049 ± 0.004 [10.2 ± 0.10]	0.049 ± 0.004 [10.2 ± 0.10]	0.029 [0.74]
100,000	7W1003	7	0.054 ± 0.005 [10.4 ± 0.13]	0.054 ± 0.005 [10.4 ± 0.13]	0.029 [0.74]
80,000	8W8002	8	0.049 ± 0.004 [10.2 ± 0.10]	0.049 ± 0.004 [10.2 ± 0.10]	0.024 [0.61]
50,000	8W5002	8	0.053 ± 0.004 [10.4 ± 0.10]	0.053 ± 0.004 [10.4 ± 0.10]	0.018 [0.46]
50,000	7W5002	7	0.051 ± 0.004 [10.3 ± 0.10]	0.051 ± 0.004 [10.3 ± 0.10]	0.014 [0.36]
30,000	8W3002	8	0.072 ± 0.005 [10.8 ± 0.13]	0.054 ± 0.005 [10.4 ± 0.13]	0.015 [0.38]
30,000	7W3002	7	0.069 ± 0.005 [10.8 ± 0.13]	0.069 ± 0.005 [10.8 ± 0.13]	0.015 [0.38]
30,000	1W3002	1	0.029 ± 0.003 [0.74 ± 0.08]	0.029 ± 0.003 [0.74 ± 0.08]	0.032 [0.81]
20,000	1W2002	1	0.035 ± 0.004 [0.89 ± 0.10]	0.035 ± 0.004 [0.89 ± 0.10]	0.032 [0.81]
15,000	1W1502	1	0.041 ± 0.004 [10.0 ± 0.10]	0.041 ± 0.004 [10.0 ± 0.10]	0.032 [0.81]
10,000	1W1002	1	0.050 ± 0.005 [10.3 ± 0.13]	0.050 ± 0.005 [10.3 ± 0.13]	0.032 [0.81]
3000	1W3001	1	0.068 ± 0.005 [10.7 ± 0.13]	0.054 ± 0.004 [10.4 ± 0.10]	0.015 [0.38]
2000	1W2001	1	0.101 ± 0.006 [20.6 ± 0.15]	0.054 ± 0.004 [10.4 ± 0.10]	0.015 [0.38]
2000	2W2001	2	0.049 ± 0.004 [10.2 ± 0.10]	0.049 ± 0.004 [10.2 ± 0.10]	0.037 [0.94]
1000	2W1001	2	0.053 ± 0.004 [10.4 ± 0.10]	0.053 ± 0.004 [10.4 ± 0.10]	0.022 [0.56]
1000	1W1001	1	0.105 ± 0.006 [20.7 ± 0.15]	0.105 ± 0.006 [20.7 ± 0.15]	0.015 [0.38]
500	2W5000	2	0.060 ± 0.005 [10.5 ± 0.13]	0.060 ± 0.005 [10.5 ± 0.13]	0.015 [0.38]
500	1W5000	1	0.148 ± 0.006 [30.8 ± 0.15]	0.148 ± 0.006 [30.8 ± 0.15]	0.015 [0.38]
300	2W3000	2	0.077 ± 0.006 [20.0 ± 0.15]	0.077 ± 0.006 [20.0 ± 0.15]	0.015 [0.38]
50	2W0500	2	0.188 ± 0.012 [40.8 ± 0.31]	0.188 ± 0.012 [40.8 ± 0.31]	0.015 [0.38]

HOW TO ORDER

8 CURVE NUMBER	W MODEL	8002 RESISTANCE VALUE	- 5 TOLERANCE @ + 25°C
First three digits are significant. The last digit is the multiplier. (80,000 ohms is illustrated.)			