



# Reliable Connections Every Time.

The Pomona® name on Banana Plugs and Jacks is your assurance of quality components for connecting test accessories or making your own test sets. Proven designs that

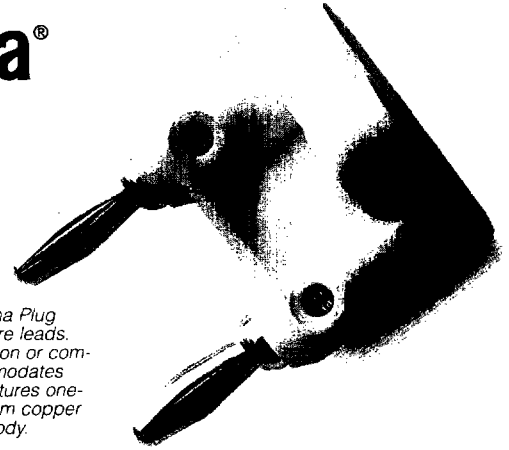

*Model MDP Double Banana Plug includes setscrew to secure leads. Simplifies cable construction or component mounting. Accommodates .215" max. dia. cable. Features one-piece heat-treated beryllium copper spring swaged in brass body. See page 79.*


meet industry's most demanding electrical characteristics feature brass bodies for rugged dependability in a wide range of environments. Precision tolerances provide secure connections, ideal for virtually any application. Heat-treated beryllium copper springs in Pomona Banana Plugs and tarnish-resistant finishes for Jacks and Binding Posts, including gold and nickel plating, assure consistent performance and a long service life.

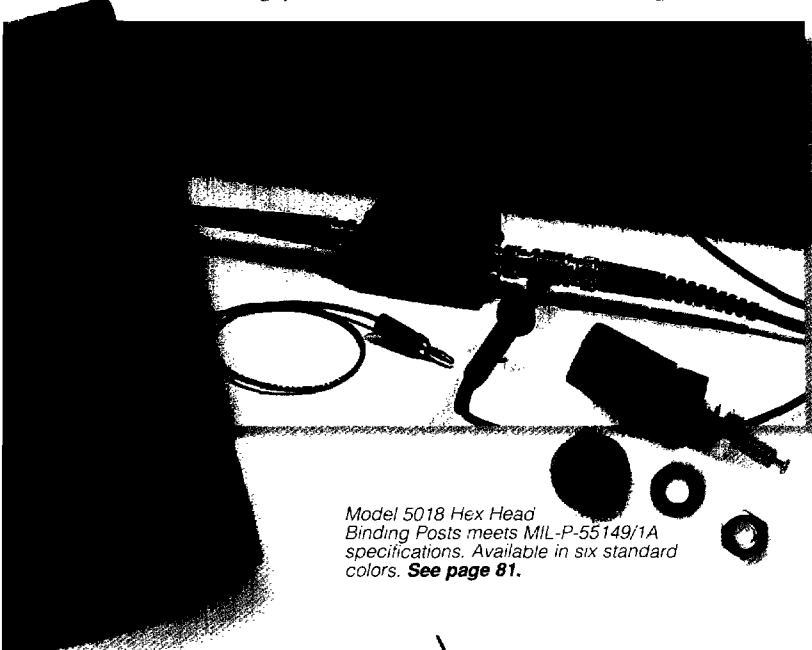

*Model 5018 Hex Head Binding Posts meets MIL-P-55149/1A specifications. Available in six standard colors. See page 81.*



*Model 122505A Do-It-Yourself Retractable Sheath Banana Plugs provide fast, simple assembly for custom test sets. See page 81.*

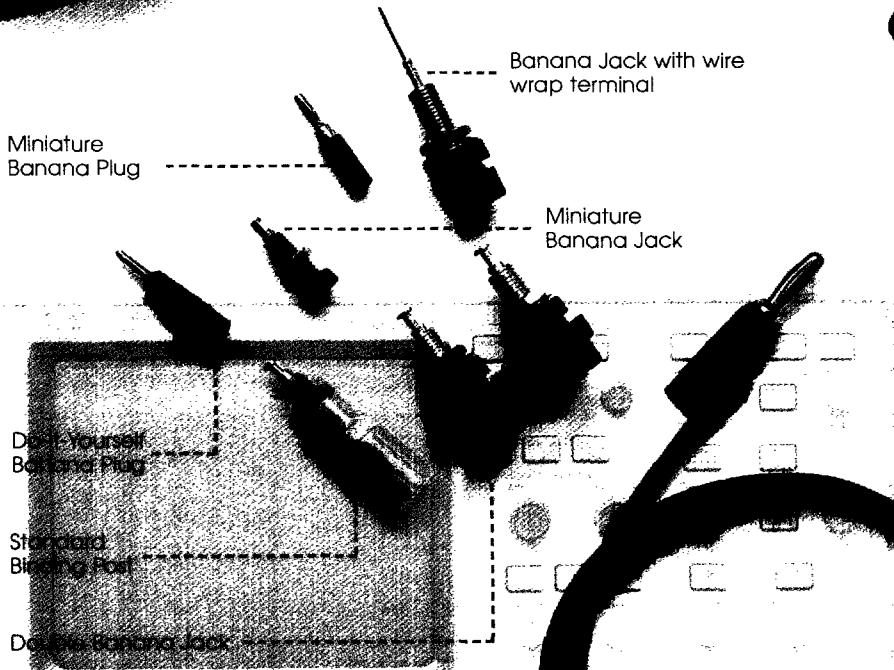

Miniature Banana Plug

Banana Jack with wire wrap terminal


Miniature Banana Jack

Do-It-Yourself Retractable Plug


Standard Binding Post

Do-It-Yourself Banana Jack

*Pomona "B" cords feature 18AWG PVC insulated wire with multiple stacking banana plugs. Nickel-plated beryllium copper springs are swaged in a brass body for best spring retention, low contact resistance and long life. Available in 10 colors, in lengths from 4" to 72". See page 54.*



**Model 1325**  
Solderless Stackup  
Banana Plug eliminates soldering by holding wire firmly in place with internal setscrew to simplify test lead assembly.

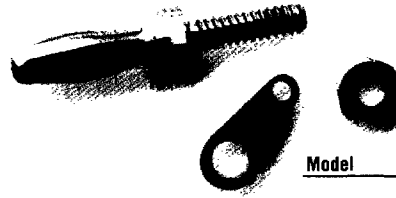

**Model 3263 Banana Plug With Threaded Stud** provides rapid mounting. Furnished with hex nut and tin-plated solder lug. Fits standard banana jack.

### DOUBLE BANANA PLUG WITH WIRE GUIDE



Setscrews secure leads. Simplifies cable construction or component mounting.

**RATING:** 5000 VDC, 15 Amps, +50°C (+122°F).  
**Model 4898** +150°C (+302°F) Max.

Model	Plating	Insulation	*STD COLORS	PRICE
MDP-*	Nickel Plated	ABS	-0 Black, -1 Brown, -2 Red -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet -8 Gray, -9 White	2.15
4892-*	Gold Plated	ABS	-0 Black, -2 Red	4.20
4898-*	Nickel Plated	Polyphenylene Sulfide	-0 Black, -6 Blue	2.40

**Model 4914 Replacement set screw** **Pomona ACCESS** 90171

### DOUBLE BANANA PLUG WITH SOLDER TURRET TERMINALS



**Color:** Black  
**RATING:** 5000 VDC, 15 Amps,  
+55°C (+131°F) Max.

Model	PRICE
MDP-ST	3.00

### DOUBLE BANANA PLUG



Features recess for mounting small components.

**RATING:** 5000 VDC, 15 Amps,  
+50°C (+122°F) Max.

\*STD COLORS: -0 Bk, -2 Red

Model	PRICE
1330-*	2.35

### DOUBLE BANANA PLUG WITH SHORTING BAR



Banana plugs internally shorted with #18 AWG wire.

**RATING:** 5000 VDC, 15 Amps,  
+50°C (+122°F) Max.

\*STD COLORS: -0 Bk, -2 Red,  
-9 White

Model	PRICE
MDP-S*	3.50

### INSULATED DOUBLE BANANA PLUG SHORTING BAR WITH BINDING POST



Shorting bar is completely insulated in clear ABS thermoplastic.

**RATING:** 2500 VDC, 15 Amps, +50°C (+122°F) Max.

\*BINDING POST COLORS: -0 Bk, -2 Red.

Model	PRICE
5165-*	8.40

**Model 5165 Insulated Double Banana Plug Shorting Bar With Binding Post** features Shorting Bar totally encapsulated in clear ABS plastic. Brass binding post, thumb nut, shorting bar and banana plug body. Fits standard banana jack.

### TERMINAL STRIP BANANA JACK ADAPTER



This adapter provides a banana jack connection by replacing the screw in a terminal strip. Secure connections can be made with standard banana plug patch cords without breaking the connection to the terminal strip.

\*STD. COLORS: -0 Black, -2 Red, -3 Orange, -4 Yellow, -5 Green,  
-6 Blue, -9 White.

Pomona ACCESS	Model	Thread	VRMS	Torque In/Lb	Stud Length	PRICE
90357	5699-*	6-32	1100	7	.25"	3.10
90357	5700-*	8-32	1600	16	.32"	3.10
90357	5701-*	10-32	1700	25	.32"	3.10

### RIVET TYPE BANANA PLUG WITH TURRET



Excellent for riveting to panels or boards. Solder turret for rapid attachment of wires.

**RATING:** 5000 VDC, 15 Amps.

Sold in pkgs. of 10.

Pomona ACCESS	Model	PRICE
90172	3261	1.20 ea.

### BANANA PLUG WITH SCREW



Fits standard .166" dia. banana jack.

**RATING:** 5000 VDC, 15 Amps.

Sold in pkgs. of 10.

Pomona ACCESS	Model	Thread	PRICE
90175	3265	6-32 x .25"	1.60
90175	3266	8-32 x .25"	1.60

Unassembled

### PIN TIP JACK TO BANANA PLUG




**RATING:** 2500 VDC, 5 Amps,  
+50°C (+122°F) Max.

Sold in pkgs. of 10.

\*STD COLORS: -0 Black, -2 Red.

Model	PRICE
1809-*	1.95 ea.

### BANANA PLUG WITH THREADED STUD



**RATING:** 5000 VDC, 15 Amps.

Sold in pkgs. of 10.

Pomona ACCESS	Model	Thread	PRICE
90173	3263	6-32 x .50"	1.35
90173	3264	8-32 x .50"	1.35
	4511	6-32 x .63"	1.50
	4512	8-32 x .63"	1.60

### DO-IT-YOURSELF SOLDERLESS STACKUP BANANA PLUG



**RATING:** 5000 VDC, 15 Amps, +50°C (+122°F) Max.  
(**Model 5230**, +150°C (+302°F) Max.)

Model	Plating	Insulation	Std. Colors	PRICE
1325-*	Nickel	ABS	-0 Black, -1 Brown, -2 Red, -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet, -8 Gray, -9 White.	1.25 ea. Sold in pkgs of 10
5406	Gold	ABS	-0 Black, -2 Red	2.50
5230	Nickel	Polyphenylene Sulfide	-0 Black, -6 Blue	1.65

### DO-IT-YOURSELF SOLDERLESS STACKUP BANANA PLUG WITH SAFETY SHIELD



**RATING:** 5000 VDC, 15 Amps, +50°C (+122°F) Max.  
(**Model 4899**, +150°C (+302°F) Max.)

Model	Plating	Insulation	Std. Colors	PRICE
1825-*	Nickel	ABS	-0 Black, -1 Brown, -2 Red, -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet, -8 Gray, -9 White.	1.25 ea. Sold in pkgs of 10
4897	Gold	ABS	-0 Black, -2 Red	2.50
4899	Nickel	Polyphenylene Sulfide	-0 Black, -6 Blue	1.60 ea. Sold in pkgs of 10

Model 2269 Banana Jack with double mounting base mounts in panels ranging in thickness from .063" to .375". Nickel-plated lockwashers and 1/4-32 hex nuts. Bright tin-plated brass body.

Model 2142 Miniature Insulated Banana Jack mounts in panels up to .250" thick. Gold-plated brass body.

## RIVET TYPE BANANA PLUG

Fits standard .166" dia. Banana Jack.  
**RATING:** 5000 VDC, 15 Amps.  
 Sold in pkgs. of 10.



Pomona ACCESS	Model	Panel	PRICE
90170	3257	.062"	1.25 ea.
90170	3258	.093"	1.15 ea.

## INSULATED BANANA PLUG WITH FLEXIBLE BOOT

Snap-on flexible PVC boot allows wire to be crimped or soldered to banana plug.  
**RATING** (Independent of wire): 5000 VDC, 15 Amps, +50°C (+122°F) Max.  
 \*STD COLORS: -0 Black, -2 Red.



Model	Accepts wire AWG	PRICE
5169-*	22, 20, 18	2.15
5170-*	16, 14	2.15

## INSULATED BANANA JACK WITH FLEXIBLE BOOT

Snap-on flexible PVC boot allows wire to be crimped or soldered to jack.  
**RATING** (Independent of wire): 5000 VDC, 15 Amps, +50°C (+122°F) Max.  
 \*STD COLORS: -0 Black, -2 Red.  
 5167 sold in pkgs. of 10.



Model	Accepts wire AWG	PRICE
5167-*	22, 20, 18	1.70 ea.
5168-*	16, 14	2.10

## PANEL MOUNT BANANA JACK

Model 1581 Banana Jack mounts in panels ranging in thickness from .063" to .375".  
**RATING:** 2500 VDC, 15 Amps, +115°C (+239°F) Max.  
 (Model 4900, +220°C (+428°F) Max.)



Pomona ACCESS	Model	Plating	Insulation	STD. COLORS	PRICE
90123	1581-*	Bright tin	Polycarbonate	-0 Black, -1 Brown, -2 Red, -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet, -8 Gray, -9 White.	.90 ea.
90161	2854-*	Gold	Polycarbonate		1.85 ea.
	4900-*	Bright tin Sulfide	Polyphenylene	-0 Black, -6 Blue	1.35 ea.

Sold in pkgs. of 10.

## PANEL MOUNT BANANA JACKS WITH DOUBLE MOUNTING BASE

**RATING:** 2500 VDC, 15 Amps, +115°C (+239°F) Max.  
 Model 5233, +220°C (+428°F) Max.



Pomona ACCESS	Model	Mounting Base	STD. COLORS	PRICE
90137	2269-*	Polycarbonate	-0 Black, -2 Red	2.50
	5233-*	Polyphenylene Sulfide	-0 Black	3.80

## MINIATURE SOLDER TYPE BANANA PLUG

Fits miniature (.104" dia.) banana jack.  
**RATING:** 2500 VDC, 5 Amps, +80°C (+176°F) Max.  
 \*STD COLORS: -0 Black, -2 Red



Model	Insulator Length	PRICE
3690-*	.45"	1.65 ea.
		Sold in pkgs. of 10
4617-*	1.00"	2.90

## MINIATURE RIVET TYPE BANANA PLUG

Fits miniature (.104" dia.) banana jack.  
**RATING:** 2500 VDC, 5 Amps  
 Sold in pkgs. of 10.



3268/3271/3272



3273

Model	Panel	PRICE
3268	.062"	1.00 ea.
3271	.093"	1.00 ea.
3272	.125"	1.00 ea.
3273	.062"	1.00 ea.

Sold in pkgs. of 10.

## MINIATURE BANANA PLUG WITH THREADED STUD

Furnished with 4-40 hex nut.  
**RATING:** 2500 VDC, 5 Amps  
 4-40 threaded stud. Gold plated.



Model	Length	PRICE
3276	.230"	1.15 ea.
4513	.480"	1.65 ea.

Sold in pkgs. of 10.

## MINIATURE PANEL MOUNT BANANA JACK

Mounts in panels up to .250" thick.  
**RATING:** 1500 VDC, 5 Amps, +115°C (+239°F) Max.  
 \*STD COLORS: Ten colors available.



Pomona ACCESS	Model	PRICE
90131	2142-*	1.15

Sold in pkgs. of 10.

## MINIATURE PANEL MOUNT BANANA JACK IN DOUBLE MOUNTING BASE

Mounts in panels up to .188" thick.  
**RATING:** 1500 VDC, 5 Amps, +115°C (+239°F) Max.  
 \*STD MOUNTING BASE COLORS: -0 Black, -2 Red.



Pomona ACCESS	Model	PRICE
90132	2143-*	3.10

## MINIATURE DOUBLE BANANA PLUG WITH SETSCREWS

**RATING:** 2500 VDC, 5 Amps, +50°C (+122°F) Max.  
 \*STD COLORS: -0 Black, -2 Red.



Model	PRICE
2244-*	4.20

## MINIATURE DOUBLE BANANA PLUG WITH SHORTING BAR

**RATING:** 2500 VDC, 5 Amps, +50°C (+122°F) Max.  
 \*STD COLORS: -0 Black, -2 Red.



Model	PRICE
2035-*	4.55

Model 3750 Standard Binding Post features a thin-line design for high-density packaging. Accepts standard banana plug. Mounts in panels ranging in thickness from .062" to .250".



### PIN AND SOCKET ADAPTERS



Nickel plated banana jack. Gold plated socket/pin.  
**Model 4690 also fits .025" sq. pins.**  
 RATING: 2500 VDC, +50°C (+122°F) Max.  
 \*STD. COLORS: -0 Black, -2 Red.

Model	Rating	Size - Contact	Type	PRICE
4690*	5 Amps	22	Socket	4.05
4691*	5 Amps	.030" dia	Pin	3.10
3560*	7.5 Amps	20	Socket	3.10
3561*	7.5 Amps	.040" dia.	Pin	3.35
3562*	13 Amps	16	Socket	3.35
3563*	13 Amps	.063" dia.	Pin	2.95
3564*	23 Amps	12	Socket	5.45
3565*	23 Amps	.093" dia.	Pin	2.95

### BINDING POSTS



RATING: 2500 VDC, 15 Amps, +115°C (+239°F) Max.  
 \*STD COLORS: Available in 10 colors.

Pomona ACCESS	Model	Plating	PRICE
90201	3750*	Gold	3.60
90201	3760*	Bright tin	2.45
90201	3770*	Gold-plated tellurium copper	5.00

Unassembled

### BINDING POST WITH DOUBLE MOUNTING BASE



RATING: 2500 VDC, 15 Amps, +115°C (+239°F) Max.  
 \*MTG BASE COLORS: -0 Black, -2 Red.

Pomona ACCESS	Model	PRICE
90238	4243*	4.85

### HEX HEAD BINDING POST



Binding Post Body, Nuts, Lockwasher: Gold Plated  
 Meets MIL-P-55149/1A.  
 RATING: 1500 VRMS, 30 Amps, +80°C (+176°F) Max.  
 \*STD COLORS: -0 Black, -2 Red, -4 Yellow, -5 Green, -6 Blue, -9 White.

Pomona ACCESS	Model	PRICE
90294	5018*	7.90

### SPRING LOADED BINDING POST



Meets MIL-P-55149/8.  
 \*STD COLORS: -0 Black, -2 Red.

Pomona ACCESS	Model	PRICE
90292	4995*	13.70

### UNINSULATED BANANA JACK



1/4 - 32 Thread.  
 RATING: 5000 VDC, 15 Amps.  
 Sold in pkgs. of 10.

Pomona ACCESS	Model	PRICE
90177	3267	.85 ea.

Unassembled

### BANANA JACK TO PIN TIP PLUG



RATING: 3000 VDC, 5 Amps, +50°C (+122°F) Max.  
 \*STD COLORS: -0 Black, -2 Red.  
 Sold in pkgs. of 10.

Model	PRICE
1432*	1.05 ea.

### MINIATURE DOUBLE PIN TIP PLUG WITH SHORTING BAR



Pin tip plugs internally shorted with 20 AWG wire.  
 RATING: 3000 VDC, 5 Amps, +115°C (+239°F) Max.  
 \*STD COLORS: -0 Black, -2 Red.

Model	PRICE
3452*	4.20

### DO-IT-YOURSELF RETRACTABLE SHEATH BANANA PLUG



Do-It-Yourself Retractable Sheath Banana Plugs provide fast simple assembly and reliable performance.

RATING: 1500 VRMS, 20 Amps, ≤ 2 mΩ.

Model	Color	PRICE
122505A	Black	2.30
122506A	Red	2.30

### PANEL MOUNT ISOLATED BANANA JACK



This banana jack fits models 4933 & 4986. It will also accept any standard banana plug.  
 RATING: 1200 V AC/DC Max., 15 Amps, +115°C (+239°F) Max.  
 \*STD COLORS: Available in 10 colors.

Model	PRICE
4921*	2.50

Unassembled

### PIN TIP JACK



RATING: 1500 VDC, 5 Amps, 115°C (+239°F) Max.  
 \*STD COLORS: Available in 10 colors.

Sold in pkgs. of 10.

Pomona ACCESS	Model	PRICE
90193	3542*	1.35 ea.

### MINIATURE PIN TIP JACK WITH DOUBLE MOUNTING BASE



Max. panel thickness .188".  
 RATING: 1500 VDC, 5 Amps, 115°C (+239°F) Max.  
 \*MTG BASE COLORS: -0 Black, -2 Red.

Pomona ACCESS	Model	PRICE
90265	4543*	3.60

Unassembled

### INSULATED PIN JACK WITH WIRE WRAP TERMINAL



Max. panel thickness .25".  
 RATING: 1500 VDC, 3 Amps, +115°C (+239°F) Max.  
 \*STD COLORS: -0 Black, -2 Red, -4 Yellow, -5 Green, -6 Blue, -9 White.

Pomona ACCESS	Model	PRICE
90276	4773*	2.25

**Model 2382 Miniature Binding Post**  
Post mounts in panels up to .188" thick. The .086" dia. cross hole is perpendicular with flat-on insulator. Gold plated brass binding post body, captive thumb nut and nickel plated hex nut. Steel lockwasher.



## MINIATURE BINDING POST



Accepts miniature banana plug. #8-32 hex nut and lockwasher included.

RATING: 1500 VDC, 5 Amps, +115°C (+239°F) Max.

\*Available in 10 colors.

Pomona ACCESS	Model	Plating	PRICE
90139	2382-*	Gold	3.85
90139	2439-*	Tin	2.90

## MINIATURE BANANA JACK WITH WIRE WRAP TERMINAL



Unassembled

Mounts in panels up to .250" thick.

RATING: 1500 VDC, 3 Amps, +115°C (+239°F) Max.

\*STD COLORS: -0 Black, -2 Red.

Sold in pkgs. of 10.

Pomona ACCESS	Model	PRICE
90223	4022-*	1.75 ea.

## EUROPEAN TRIPLE BANANA JACK



Unassembled

RATING: 2500 VDC, 15 Amps, +115°C (+239°F) Max.

Black only.

Pomona ACCESS	Model	PRICE
90234	4163-0	5.45

## DO-IT-YOURSELF MINIATURE BANANA PLUG WITH SAFETY SHIELD



Wire firmly held in place with internal set screw.

RATING: 2500 VDC, 5 Amps, +50°C (+122°F) Max.

\*STD. COLORS: -0 Black, -2 Red.

Model	PRICE
2945-*	3.00

## DO-IT-YOURSELF PIN TIP PLUG WITH SAFETY SHIELD



Wire firmly held in place with internal set screw.

RATING: 3000 VDC, 5 Amps, +50°C (+122°F) Max.

\*STD COLORS: -0 Black, -2 Red.

Model	PRICE
3548-*	3.25

## MINIATURE RIVET TYPE BANANA JACK WITH TURRET



Mounts in panels up to .062" thick.

RATING: 1500 VDC, 5 Amps.

Sold in pkgs. of 10.

Pomona ACCESS	Model	PRICE
90178	3277	5.45

**Model 4934 Do-It-Yourself In-Line Sheathed Banana Jack** protects from accidental shorting when dropped. Accepts standard banana plugs. Threaded, two-piece design allows wire to be crimped or soldered to banana jack.



## DO-IT-YOURSELF IN-LINE SHEATHED BANANA PLUG/BANANA JACK



4933/4986

These plugs and jacks are designed to fit together. Plugs also work with Model 4921 panel jack.

RATING (Independent of wire): 1200 V AC/DC, 15 Amps, +80°C (+176°F) Max.

\*STD COLORS: -0 Black, -2 Red.



4934/4987

Model	Accepts wire AWG	Wire access hole	PRICE
4933-*	22, 20, 18	.159" Dia. Plug	3.10
4986-*	16, 14	.200" Dia. Plug	3.10
4934-*	22, 20, 18	.159" Dia. Jack	3.20
4987-*	16, 14	.200" Dia. Jack	3.20

## SPADE LUG TO BANANA JACK



Permits single banana plug to be used with equipment having barrier strips.

RATING: 5000 VDC, 15 Amps, +50°C (+122°F) Max.

\*STD. COLORS: -0 Black, -2 Red.

Model	Lug Size	PRICE
3744-*	4, 5 & 6	3.10
3777-*	8 & 10	3.10

## MINIATURE DO-IT-YOURSELF BANANA PLUG



Wire firmly held in place with internal setscrew.

RATING: 2500 VDC, 5 Amps, +50°C (+122°F) Max.

\*STD COLORS: -0 Black, -2 Red.

Model	PRICE
2944-*	2.95



Model 2944 Miniature Do-It-Yourself Banana Plug holds wire firmly in place with internal setscrew. Miniature Banana Plug fits miniature .104" banana jack. Gold-plated, one-piece heat-treated beryllium copper spring provides high fatigue resistance.

## BANANA JACK TO MINIATURE BANANA PLUG



RATING: 2500 VDC, 5 Amps, +50°C (+122°F) Max.

\*STD COLORS: -0 Black, -2 Red.

Sold in pkgs. of 10.

Model	PRICE
2138-*	1.90 ea.

## MINIATURE BANANA JACK TO BANANA PLUG



RATING: 2500 VDC, 5 Amps, +50°C (+122°F) Max.

\*STD COLORS: -0 Black, -2 Red.

Sold in pkgs. of 10.

Model	PRICE
2477-*	1.70 ea.

## INSULATED DOUBLE BANANA PLUG SHORTING BAR




Shorting bar is completely insulated in clear ABS thermoplastic.

RATING: 15 Amps, +50°C (+122°F) Max., resistance less than 1.5 Milliohms.

Model	PRICE
5145	5.05

Model MDP-X Double Banana Plug Four Terminal Isolation features top-stackup receptacles isolated from lower Banana Plugs. Ideal applications include insertion of matching network in laboratory VTVM signal generators. Bright tin-plated solder turret terminals provide permanent noise-free connections.



### ISOLATED DOUBLE BANANA PLUG WITH FOUR TERMINALS

Use to make your own attenuator, balun or filter.  
 RATING: 2500 VDC, 15 Amps, +55°C (+131°F) Max.

Model	PRICE
MDP-X	9.80

Jacks are isolated from plugs.

### ISOLATED SINGLE BANANA PLUG WITH TWO TERMINALS

Ideal for computers, lab circuit design and testing.

RATING: 2500 VDC, 15 Amps, +55°C (+131°F) Max.

\*STD. COLORS: -0 Black, -2 Red.




Model	PRICE
1390-*	5.50

Jack is isolated from plug.

### ISOLATED DOUBLE BANANA PLUG WITH THREE TERMINALS

Use to make your own attenuator, balun or filter.

RATING: 2500 VDC, 15 Amps, +55°C (+131°F) Max.



Model	PRICE
1837	11.10

One jack is isolated.

### DOUBLE BANANA PLUG SPLICE

Provides rapid method for splicing cables.

RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.

\*STD. COLORS: -0 Black, -2 Red.



Model	PRICE
1823-*	2.70

### SINGLE BANANA PLUG SPLICE

Provides rapid method for splicing single banana plug patch cords.

RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.

\*STD. COLORS: -0 Black, -2 Red.

Sold in pkgs. of 10.




Model	PRICE
1829-*	1.40 ea.

### DOUBLE BANANA PLUG WITH SOLDER TURRET TERMINALS

Features recess for mounting small components. Bright tin plating on terminals.

RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.

\*STD. COLORS: -0 Black, -2 Red.



Model	PRICE
1330-ST-*	3.00

Model 2383 Miniature Insulated Double Binding Post accepts miniature banana plug and mounts in panels up to .188" thick. Gold plated brass binding post body and captive thumb nuts. Nickel-plated brass hex nuts and steel lockwashers.



### DOUBLE BANANA JACK TO MINIATURE DOUBLE BANANA PLUG



RATING: 2500 VDC, 5 Amps, +50°C (+122°F) Max.

Model	PRICE
2952	7.05

### QUAD STACKING PLUG

Features 1 in-line stacking and three cross-stacking connections.

RATING: 5000 VDC, 15 Amps, +50°C (+122°F) Max.

\*STD. COLORS: -0 Black, -2 Red.



Model	PRICE
3364-*	9.65

All jacks are connected to plug.

### MINIATURE INSULATED BINDING POST WITH DOUBLE MOUNTING BASE

8-32 hex nut and lockwasher included.

RATING: 1500 VDC, 5 Amps, +115°C (+239°F) Max.

\*MOUNTING BASE COLORS: -0 Black, -2 Red.



Pomona ACCESS	Model	Plating	PRICE
90155	2383-*	Gold	7.65
90155	2440-*	Tin	5.95

### DOUBLE BANANA PLUG WITH BINDING POSTS


Features insulated binding posts on .750" centers for rapid mounting and interchangeability of components. Center cross hole .166" dia. provides side stackup connection.

RATING: 2500 VDC, 15 Amps, +50°C (+122°F) Max.



Model	Plating	PRICE
1286	Nickel	7.60
5405	Gold	10.75

Model 1286 Double Banana Plug with Binding Posts features insulated double binding posts on .750" centers for rapid mounting and interchangeability of components. The cross hole provides side stacking connection. Nickel-plated brass construction.



### TRIPLE BANANA PLUG

Use for balanced line 2 conductor shielded cable assemblies.

RATING: 5000 VDC, 15 Amps, +50°C (+122°F) Max.

\*STD. COLORS: -0 Black, -2 Red.



Model	PRICE
2970-*	4.30

Setscrews secure wires.

### MINIATURE SOLDERLESS TYPE TRIPLE BANANA PLUG WITH WIRE GUIDE


Use for balanced line 2 conductor shielded cable assemblies.

RATING: 2500 VDC, 5 Amps, +50°C (+122°F) Max.



Model	PRICE
4653-0	10.90

Setscrews secure wires.



Model 4098 Binding Post With Wire Wrap Terminal is ideal for rapid connection of wires using wire wrapping tools or machines. Accepts standard banana plug and mounts in panels ranging in thickness from .062" to .250".

### BINDING POST WITH WIRE WRAP TERMINAL

RATING: 2500 VDC, 3 Amps, +115°C (+239°F) Max.  
 \*STD. COLORS: -0 Black, -2 Red, -4 Yellow, -5 Green, -9 White.

Pomona ACCESS	Model	PRICE
90225	4098-*	4.05

### BINDING POST TO BANANA PLUG



Features insulated binding post for rapid mounting and interchangeability of components. Center cross hole .166" dia. provides side stackup connection.  
 RATING: 2500 VDC, 15 Amps, +50°C (+122°F) Max.

\*BINDING POST COLORS: -0 Black, -2 Red.

Model	PRICE
2894-*	4.15

### FULLY INSULATED SPRING-LOADED BINDING POST



\*STD. COLORS: -0 Black, -2 Red, -4 Yellow, -5 Green, -6 Blue, -9 White.

Pomona ACCESS	Model	PRICE
90275	4770-*	8.05

### BANANA JACK WITH WIRE WRAP TERMINAL



RATING: 2500 VDC, 3 Amps, +115°C (+239°F) Max.  
 \*STD. COLORS: -0 Black, -2 Red.  
 Sold in pkgs. of 10 per color.

Pomona ACCESS	Model	PRICE
90222	4005-*	1.80 ea.

Unassembled

### PANEL MOUNT BANANA JACKS WITH WIRE WRAP TERMINAL, DOUBLE MOUNTING BASE



One black and one red jack. Choice of black or red mounting base.  
 RATING: 2500 VDC, 3 Amps, +115°C (+239°F) Max.  
 \*MOUNTING BASE COLOR: -0 Black, -2 Red

Pomona ACCESS	Model	PRICE
90224	4069-*	4.05

### BANANA JACK TO .080" DIA. PIN TIP JACK



RATING: 3000 VDC, 5 Amps, +55°C (+131°F) Max.  
 \*STD. COLORS: -0 Black, -2 Red.

Model	PRICE
3834-*	2.25

### PANEL MOUNT BANANA JACKS WITH TRIPLE MOUNTING BASE



Mounts in panels from .063" to .375" thick. One black, one red and one green jack. Choice of black or red mounting base.

RATING: 2500 VDC, 15 Amps, +115°C.

\*MOUNTING BASE COLOR: -0 Black, -2 Red.

Model	PRICE
4601-*	4.00

### LOW VOLTAGE INSULATED SPADE LUG



Special alloy and plating preserves the accuracy of low voltage measurement equipment. Thermal effects are minimized. Heavy construction for minimum voltage loss. Mates with low voltage banana plug patch cords and binding posts.

Set of one red and one black.

RATING: 5000 VDC, 15 Amps, +50°C (+122°F) Max.



Model 2305 Low Voltage Insulated Spade Lug provides precision measurement when attaching standard banana plug to equipment with binding post.

Pomona ACCESS	Model	PRICE
90138	2305	10.90

### MOUNTING BASES



3862



3863

RATING: +115°C (+239°F) Max.  
 \*STD. COLORS: -0 Black, -2 Red

Pomona ACCESS	Model	Type	Used With	PRICE
90218	3862-*	Double	Standard	55 ea.
90218	3863-*	Triple	Binding Posts	1.20 ea.
90218	4619-*	Double	Standard	45 ea.
90218	4614-*	Triple	Banana Jacks	80 ea.
90218	4654-*	Double	Miniature	45 ea.
90218	4590-*	Triple	Banana Jacks	1.05 ea.

Sold in pkgs. of 10.

### SHORTING LINK FOR STANDARD BINDING POSTS



RATING: 15 Amps.  
 Sold in pkgs. of 10.

Pomona ACCESS	Model	PRICE
90227	4115	.70 ea.

Fits Binding Posts on .75" centers.

### MINIATURE DOUBLE BANANA PLUG SHORTING BAR



Gold Plated.  
 RATING: 5 Amps. Resistance less than 1.5 milliohms.

Model	PRICE
3030	3.25

Fits Miniature Binding Posts and Miniature Banana Jacks on on .5" centers.

### DO-IT-YOURSELF .080" DIA. PIN TIP PLUG WITH FLEXIBLE BOOT



RATING (Independent of wire): 3000 VDC, 5 Amps, +50°C (+122°F) Max.  
 \*STD. COLORS: -0 Black, -2 Red.

Model	Accepts Wire AWG	PRICE
5173-*	22,20,18	2.25