

TECHNICAL DATA
DATA SHEET 5345, REV. A.2

500W Unidirectional Transient Voltage Suppressor Diode Chip/Die


- Operating and Storage Temperature: -55°C to +175°C

SERIES TYPE	MIN BREAKDOWN VOLTAGE $V_{(BR)}$ @ $I_{(BR)}$		WORKING PEAK REVERSE VOLTAGE V_{RWM}	MAXIMUM REVERSE CURRENT I_{R1}	MAX. CLAMP. VOLTAGE V_C @ I_P $t_p = 1ms$	MAX. PEAK PULSE CURRENT I_P	MAX. TEMP. COEFFICIENT $V_{(BR)}$
	Vdc	mA dc					
500W	Vdc	mA dc	Vdc	μ Adc	V(pk)	A(pk)	% / °C
1C6107	9.9	125	8.4	20	16.3	30.7	0.07
1C6107A	10.45	125	8.4	20	15.6	32.0	0.07
1C6108	10.8	100	9.1	20	17.7	28.2	0.07
1C6108A	11.4	100	9.1	20	16.9	29.6	0.07
1C6109	11.7	100	9.9	20	19	26.3	0.08
1C6109A	12.35	100	9.9	20	18.2	27.5	0.08
1C6110	13.5	75	11.4	20	21.9	22.8	0.08
1C6110A	14.25	75	11.4	20	21	23.8	0.08
1C6111	14.4	75	12.2	20	23.4	21.4	0.08
1C6111A	15.2	75	12.2	20	22.3	22.4	0.08
1C6112	16.2	65	13.7	1	26.3	19.0	0.085
1C6112A	17.1	65	13.7	1	25.1	19.9	0.085
1C6113	18	65	15.2	1	29	17.2	0.085
1C6113A	19	65	15.2	1	27.7	18.0	0.085
1C6114	19.8	50	16.7	1	31.9	15.7	0.085
1C6114A	20.9	50	16.7	1	30.5	16.4	0.085
1C6115	21.6	50	18.2	1	34.8	14.4	0.09
1C6115A	22.8	50	18.2	1	33.3	15.0	0.09
1C6116	24.3	50	20.6	1	39.2	12.8	0.09
1C6116A	25.7	50	20.6	1	37.4	13.4	0.09
1C6117	27	40	22.8	1	43.6	11.5	0.09
1C6117A	28.5	40	22.8	1	41.6	12.0	0.09
1C6118	29.7	40	25.1	1	47.9	10.4	0.095
1C6118A	31.4	40	25.1	1	45.7	10.9	0.095
1C6119	32.4	30	27.4	1	52.3	9.6	0.095
1C6119A	34.2	30	27.4	1	49.9	10.0	0.095
1C6120	35.1	30	29.7	1	56.2	8.9	0.095
1C6120A	37.1	30	29.7	1	53.6	9.3	0.095
1C6121	38.7	30	32.7	1	62	8.1	0.095
1C6121A	40.9	30	32.7	1	59.1	8.5	0.095
1C6122	42.3	25	35.8	1	67.7	7.4	0.095
1C6122A	44.7	25	35.8	1	64.6	7.7	0.095
1C6123	45.9	25	38.8	1	73.5	6.8	0.095
1C6123A	48.5	25	38.8	1	70.1	7.1	0.095
1C6124	50.4	20	42.6	1	80.7	6.2	0.095
1C6124A	53.2	20	42.6	1	77	6.5	0.095
1C6125	55.8	20	47.1	1	89.3	5.6	0.1
1C6125A	58.9	20	47.1	1	85.3	5.9	0.1
1C6126	61.2	20	51.7	1	98	5.1	0.1
1C6126A	64.6	20	51.7	1	97.1	5.1	0.1
1C6127	67.5	20	56	1	108.1	4.6	0.1
1C6127A	71.3	20	56	1	103.1	4.8	0.1
1C6128	73.8	15	62.2	1	118.2	4.2	0.1
1C6128A	77.9	15	62.2	1	112.8	4.4	0.1
1C6129	81.9	15	69.2	1	131.1	3.8	0.1
1C6129A	86.5	15	69.2	1	125.1	4	0.1
1C6130	90	12	76	1	144.1	3.5	0.1
1C6130A	95	12	76	1	137.6	3.6	0.1

TECHNICAL DATA
DATA SHEET 5345, REV. A.2

SERIES TYPE	MIN BREAKDOWN VOLTAGE $V_{(BR)}$ @ $I_{(BR)}$		WORKING PEAK REVERSE VOLTAGE V_{RWM}	MAXIMUM REVERSE CURRENT I_{R1}	MAX. CLAMP. VOLTAGE V_C @ I_P $t_p = 1ms$	MAX. PEAK PULSE CURRENT I_P	MAX. TEMP. COEFFICIENT $V_{(BR)}$
	Vdc	mA dc					
500W	Vdc	mA dc	Vdc	μA_{dc}	V(pk)	A(pk)	% / °C
1C6131	99	12	83.6	1	158.5	3.2	0.1
1C6131A	104.5	12	83.6	1	151.3	3.3	0.1
1C6132	108	10	91.2	1	172.9	2.9	0.1
1C6132A	114	10	91.2	1	165.1	3	0.1
1C6133	117	10	98.8	1	187.3	2.7	0.105
1C6133A	123.5	10	98.8	1	178.8	2.8	0.105
1C6134	135	8	114	1	216.2	2.3	0.105
1C6134A	142.5	8	114	1	206.3	2.4	0.105
1C6135	144	8	121.6	1	228.8	2.2	0.105
1C6135A	152	8	121.6	1	218.4	2.3	0.105
1C6136	162	5	136.8	1	257.4	1.9	0.11
1C6136A	171	5	136.8	1	245.7	2	0.11

MECHANICAL DIMENSIONS In Inches / (mm)

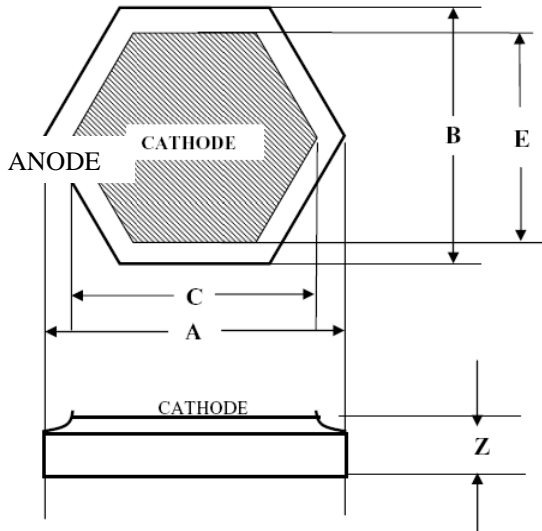

Standard Metallization: Top side: Al; 25 kÅ minimum
Bottom side: Ti/Ni/Ag; 30 kÅ minimum

Bottom side is cathode, top side is anode

	Die Diameter A	Die Flat to Flat B	Metal Diameter C	Metal Flat to Flat E	Die Thickness Z
500W TVS and 5 W Zener	0.090 ± 0.003 (2.286 ± 0.076)	0.079 ± 0.003 (2.006 ± 0.076)	0.072 ± 0.003 (1.829 ± 0.076)	0.062 ± 0.003 (1.575 ± 0.076)	0.010 ± 0.001 (0.254 ± 0.025)

TECHNICAL DATA
DATA SHEET 5345, REV. A.2

PART ORDERING INFORMATION:

1 CXXXX XX X -X

Part Number

Metal Combinations (blank is Al top/Ag bottom):

Suffix	Top	Bottom	Part Number
blank	Al	Ag	1C6108
AG	Al	Au	1C6108AG
BB	Ag	Ag	1C6108BB
BG	Ag	Au	1C6108BG
GG	Au	Au	1C6108GG
GB	Au	Ag	1C6108GB

A = Ti (0.3 kA) / Al (25 kA)

B = Ti (1.2 kA) / Ni (1.8 kA) / Ag (30kA)

G = Ti (1.2 kA) / Ni (1.8 kA) / Au (12kA) (TOP) / Ti (1.2 kA) / Ni (1.8 kA) / Au (4kA) (BOTTOM)

Quality Level (blank is commercial level):

Suffix	Part Number	Description
blank	1C6108	Commercial level
H	1C6108H	Class H level
K	1C6108AGK	Class K level Al top/Au bottom

Polarity (blank is anode top/cathode bottom):

Suffix	Top	Bottom	Part Number
blank	Anode	Cathode	1C6108
-R	Cathode	Anode	1C6108AGK-R

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.